



The new degree of comfort.™

Approved Venting by Centrotherm for Rheem Prestige™ Series Condensing Tankless Water Heaters.

Rheem, an industry leader for total heating, cooling and water heating solutions, is pleased to announce a new venting alternative for our **Prestige™ Series Condensing Tankless Water Heaters**. The InnoFlue® polypropylene venting by Centrotherm Eco Systems.

InnoFlue®, an intelligent alternative to PVC and CPVC provides a safe, reliable and environmentally sustainable vent system. InnoFlue® provides these benefits all while reducing installation time up to 75%. InnoFlue® is manufactured from environmentally friendly polypropylene. Centrotherm Eco Systems backs their polypropylene technology with a 10-year limited warranty. It is as an alternative venting solution for the Rheem **Prestige™ Series Condensing Tankless Water Heaters**. InnoFlue® offers a comprehensive line of components such as test ports, condensate drains, elbows, vent lengths and adapters to accommodate a wide variety of installations.



The InnoFlue® offers the following benefits

- Designed specifically for venting gas appliances
- No glue needed
- Positive seal and locking design
- Lightweight - Easy to cut
- Fittings for just about every installation
- UL-1738, ULC-S636 and CE EN-14471 listed
- 10-year Limited Warranty** on InnoFlue® venting

** warranty coverage provided by Centrotherm Eco Systems contact them for details

All manufacturer instructions and requirements for installation must be followed for the installation. See the Rheem Use and Care Manual for installation details.


Contact Centrotherm Eco Systems at 1-877-434-3432, or visit their web-site www.centrotherm.us.com, for additional information about product availability and accessories.

Flexible venting is not approved by Rheem for use with the Rheem Prestige™ Series Condensing Tankless Water Heaters.



These InnoFlue® products have been tested and approved for use with the Rheem Prestige™ Series Condensing Tankless Water Heaters

Horizontal Installation Example

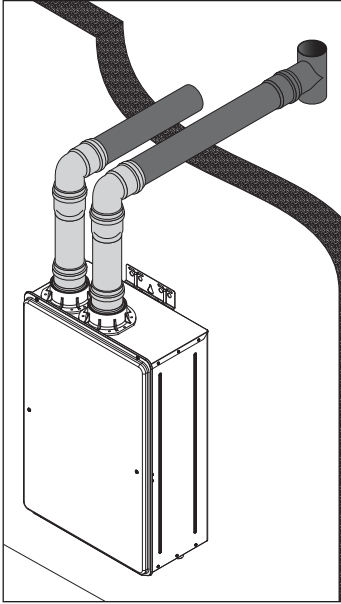

ISELL0387
87° Long Elbow



ISEL0387
87° Elbow



ISAGL0303
3" PVC to PP



ISVL031
12" Length
ISVL032
24" Length
ISVL033
36" Length
ISVL036
72" Length



ISHDT03
Horizontal Drain




ISTP03
Test Port



IASPP03
Bird Screen (UV)

Vertical Installation Example

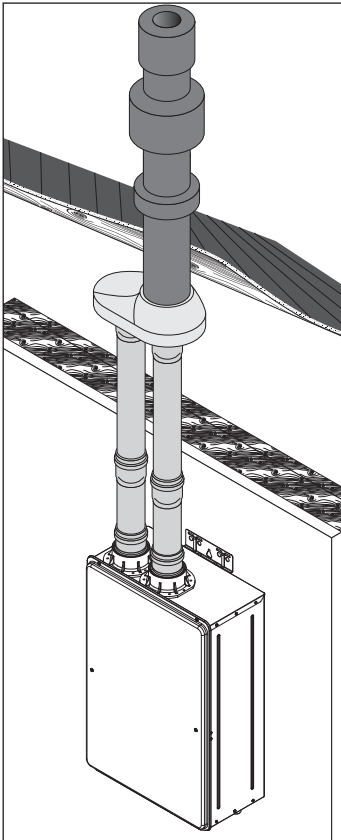

ISTT0320
Termination Tee (UV)



ISEL0387UV
87° Elbow (UV)



IANS03
Connector Ring



ISVL032UV
24" Length (UV)



ICRT2439
Concentric
Roof Termination



ICWT352
Concentric Wall Termination



ISLPT0303
Low Profile
Wall Termination



ICTC0335
Two Pipe to
Concentric



ISEP03
End Pipe (UV)

See the Rheem Use and Care Manual for installation instructions and information on allowable venting options and clearances

Contact Centrotherm Eco Systems at 1-877-434-3432, or visit their web-site www.centrotherm.us.com, for additional information about product availability and accessories.

Flexible venting is not approved by Rheem for use with the Rheem Prestige™ Series Condensing Tankless Water Heaters.



INTEGRATED HOME COMFORT

7/12 TKPB-CENT

Rheem.com