

SUBMITTAL COVER SHEET

PROJECT NAME _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						

ACCESSORIES:


NOTES:

SUBMITTAL SHEET FOR PACKAGE GAS ELECTRIC RKNL- 13 SEER SERIES, RKPL- 14 SEER SERIES Featuring Earth-Friendly R-410A Refrigerant Nominal Sizes 3-5 Tons [10.6-17.6 kW]

R-410A
earth friendly refrigerant

JOB NAME _____
CONTRACTOR _____
ENGINEER _____
LOCATION _____
ORDER NO. _____
SUBMITTED FOR ☐ APPROVAL ☐ RECORD
SUBMITTED BY _____
DATE _____
UNIT DESIGNATION _____
MODEL NO. _____

UNIT DIMENSIONS FOR PACKAGE GAS ELECTRIC 3 TO 5 TON [10.6 TO 17.6 kW] MODELS

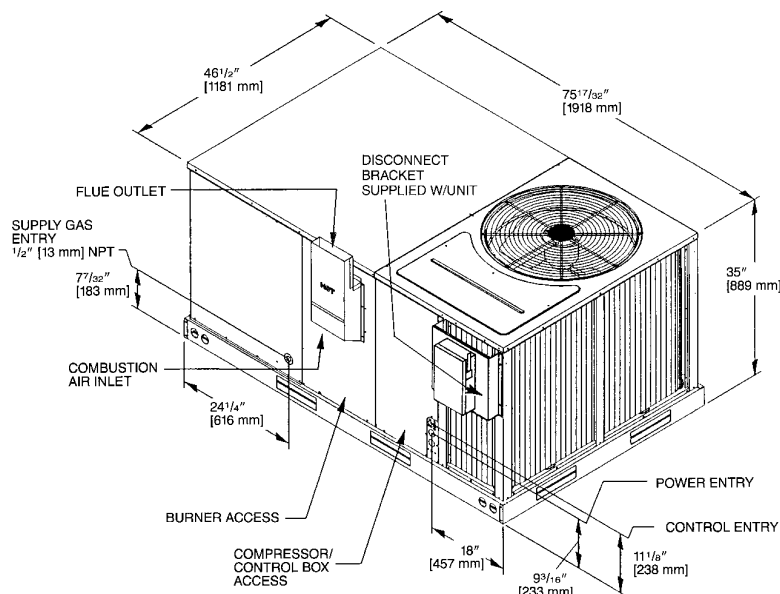

UNIT DATA

COOLING PERFORMANCE

TOTAL CAPACITY* MBH
SENSIBLE CAPACITY* MBH
OUTDOOR DESIGN TEMP. °F [°C] DB/WB
TOTAL SUPPLY AIR CFM [L/s]
TEMP. OF AIR ENTERING
EVAPORATOR COIL °F [°C] DB/WB
POWER INPUT REQUIREMENT kW
SEER/EER RATING
(*uses blower motor heat)

HEATING PERFORMANCE

GAS HEAT INPUT CAPACITY MBH
GAS HEAT OUTPUT CAPACITY MBH
STEADY STATE EFFICIENCY

SUPPLY AIR BLOWER PERFORMANCE

TOTAL SUPPLY AIR CFM [L/s]
TOTAL RESISTANCE EXTERNAL
TO UNIT IWG
BLOWER SPEED RPM
POWER OUTPUT REQUIREMENT .. BHP
MOTOR RATING HP [W]
POWER INPUT REQUIREMENT kW

ELECTRICAL DATA


POWER SUPPLY /
TOTAL UNIT AMPACITY AMPS
MINIMUM WIRE SIZE AWG
MAXIMUM OVERCURRENT DEVICE
FUSES HACR BREAKER AMPS

TOTAL UNIT WEIGHT

TOTAL OPERATING WEIGHT LBS [kg]
(including field-installed accessories)


CLEARANCES

FRONT	48" [1219 mm]
CONDENSER COIL	18" [457 mm]
DUCT SIDE	12" [305 mm]
EVAPORATOR END	36" [914 mm]
ABOVE UNIT	60" [1524 mm]

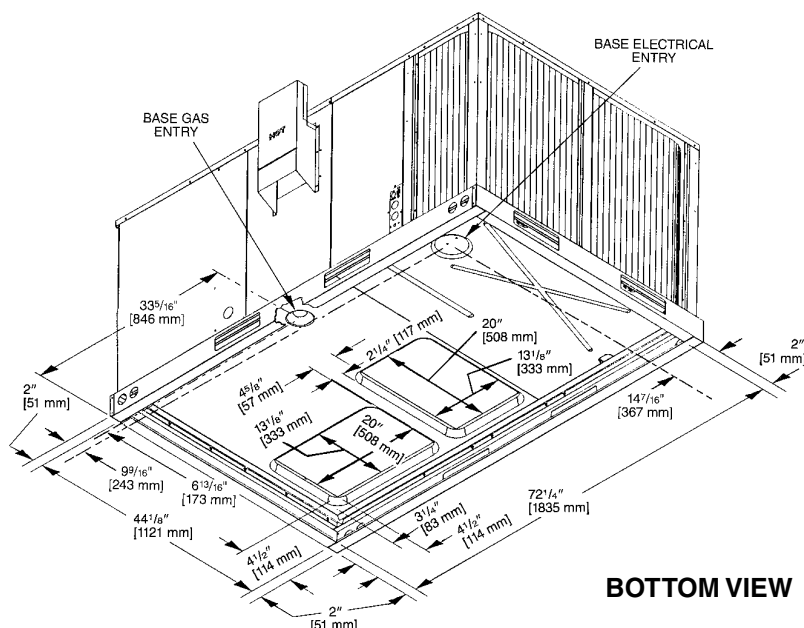

BOTTOM VIEW

[] Designates Metric Conversions

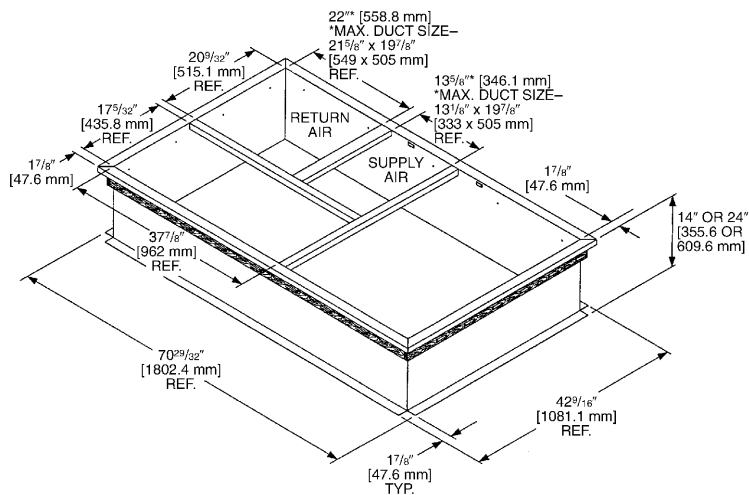

ROOFCURB FOR RKNL/RKPL 3-5 TON [10.6-17.6 kW] MODELS

[] Designates Metric Conversions

ACCESSORIES

Economizers

- Single Enthalpy ☐
Dual Enthalpy ☐
CO₂ Sensor ☐

Fresh Air Dampers

- Manual ☐
Motorized ☐

- Condenser Coil Guards ☐
Roofcurbs ☐
Low Ambient Control ☐
Electric Heater Kits ☐
Concentric Diffuser ☐
Rectangular to Round Transition..... ☐
Roofcurb Adaptors ☐
High Pressure Control ☐
Low Pressure Control ☐
Time Delay ☐
Unwired Convenience Outlet ☐
Unfused Disconnect ☐
Stainless Steel Heat Exchange ☐
Thermostat..... ☐

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

RHEEM
MANUFACTURING
COMPANY
5600 Old Greenwood Road, Fort Smith, Arkansas 72908

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."