

PACKAGE AIR CONDITIONERS

FORM NO. S22-934 REV. 3
Supersedes Form No. S22-934 Rev. 2

Featuring Earth-Friendly R-410A Refrigerant



RSNL- 13-SEER SERIES
NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

RSPL- 14-SEER SERIES
NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]



"Proper sizing and installation of equipment is critical to achieve optimal performance.
Ask your Contractor for details or visit www.energystar.gov <<http://www.energystar.gov/>>."



Unit Features & Benefits3-4

Model Identification Options.....5-6

General Data

 RSNL- Series7-9

 RSPL- Series10-12

General Data Notes13

Performance Data

 RSNL- Series14-16

 RSPL- Series17-19

Airflow Performance

 RSNL- Series20-22

 RSPL- Series23-26

Electrical Data

 RSNL- Series.....27

 RSPL- Series.....28

Electric Heater Kits29-30

Dimensional Data31-32


Typical Installations33

Accessories34-43

Typical Wiring.....44-49

Limited Warranty52

These quality features are included in the Ruud Package Air Conditioner

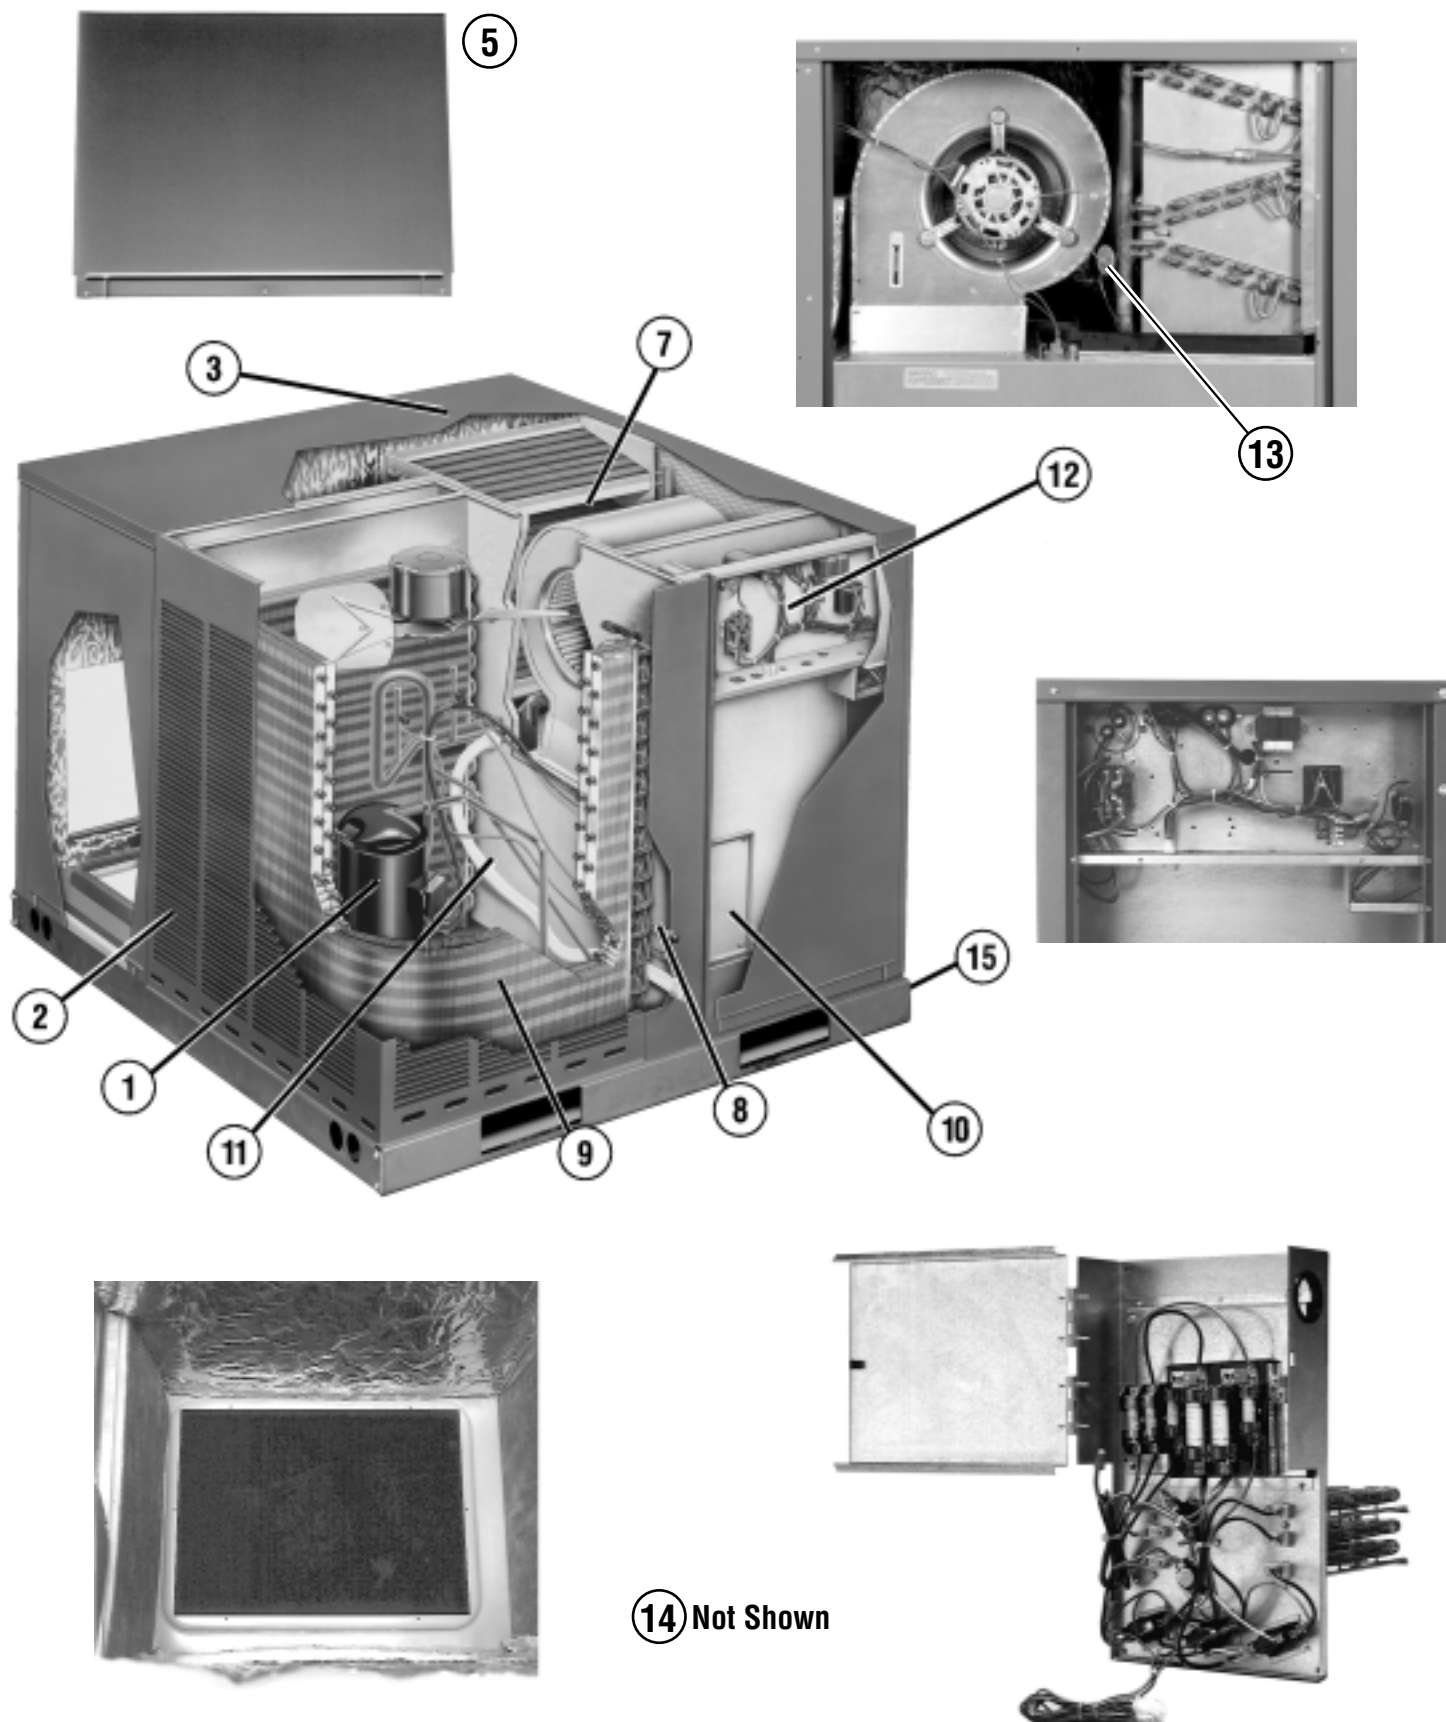



Features Below Correspond to Photos on Page 3

1. All models feature Scroll® compressors for maximum efficiency and quiet operation. The 5-Ton RSPL model features Scroll UltraTech™ 2-Stage compressors with Comfort Alert™ diagnostics (see below), high/low pressure switches, and hard start kits.
2. Louvered condenser compartment for protecting the coil against yard hazards and/or weather extremes.
3. One-piece top with a drip lip to help keep water off of the unit sides.
4. Supply and return air openings feature a one-inch tall flange to prevent water migration into the ductwork.
5. Access panels have “weep holes” and channels to further help manage water run-off.
6. Side and down discharge options available on all models.
7. Easily accessible blower section complete with slide-out blower.
8. Refrigerant connections are conveniently located for easy service diagnostics.
9. Condenser and evaporator coils feature enhanced fins for better heat transfer and rifled copper tubing for greater efficiency.
10. Supplemental electric heat strips up to 15 kW are available (field or factory installed) for periods of extreme cold temperatures. Single point wiring simplifies installation.
11. All units feature an internal trap on the condensate line eliminating the need for installing an on-site external trap.
12. Easily accessible control box.
13. Thermal expansion valve standard on all models for superior superheat control, reliability, and energy efficiency at all operating conditions.
14. Filter drier standard on all models (not shown).
15. Rugged baserail included for improved installation and handling.

Comfort Alert™ Diagnostics – Faster Service And Improved Accuracy (5 Ton RSPL 2-Stage Model Only)

The Comfort Alert™ diagnostics module is a breakthrough innovation for troubleshooting air conditioning system failures. The module is installed in the control box near the compressor contactor. By monitoring and analyzing data from the Scroll® compressor and the thermostat demand, the module can accurately detect the cause of electrical and system related failures without any sensors. A flashing LED indicator communicates the ALERT code and guides the service technician more quickly and accurately to the root cause of a problem.

NOTE: Single phase module does not provide safety protection! The Comfort Alert module is a monitoring device and cannot control or shut down the compressor unless used with a White-Rodgers 1F95-CA397 thermostat.

NOTE: Three phase module provides compressor protection and will shut down the compressor when compressor damaging conditions are detected.



MODEL IDENTIFICATION—RSNL-/RSPL- SERIES



R S N L — B 036 J K 010 X X X

Factory Installed Options
(See Next Page)

Heating Capacity (Factory Installed)

000 = No Resistance Heat

005 = 05 KW Resistance Heat (024-030)

010 = 10 KW Resistance Heat (024-060)

015 = 15 KW Resistance Heat (036-060)

Drive Package

K = Direct Drive

Electrical Designation

J = 208-230V—1PH—60 Hz

C = 208-230V—3PH—60 Hz

Cooling Capacity (BTUH) [kW]

024 = 24,000 [7.03]

030 = 30,000 [8.79]

036 = 36,000 [10.55]

042 = 42,000 [12.31]

048 = 48,000 [14.07]

060 = 60,000 [17.59]

Future Technical Variations

B = 1st Variation

C = 2nd Variation

Design Series (R-410A)

Efficiency Designation

N = 13 SEER

P = 14 SEER

Product Classification

S = Package Air Conditioner

Tradebrand

R = Ruud

[] Designates Metric Conversions

Instructions for Factory Installed Option(s) Selection

Note: Two characters following the model number will be utilized to designate a factory-installed option or combination of options. If no factory option(s) is required, nothing follows the model number.

Step 1. After a basic rooftop model is selected, choose a *two-character* option code from the FACTORY INSTALLED OPTION SELECTION TABLE.

FACTORY INSTALLED OPTION CODES

Option Code	Side Flow
AA	No Option
AK	x

Example: RSNL-036JK000**XX** (where **XX** is factory installed option)

Example: No Options
RSNL-036JK000

Example: Options with Sideflow
RSNL-036JK000AK

Note: Factory installed economizer is not available on these models.



NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RSNL- Series	B024JK	B030JK	B036CK	B036JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	24,400 [7.15]	29,800 [8.73]	37,000 [10.84]	37,000 [10.84]
EER/SEER ²	11.1/13	11.1/13	11.3/13	11.3/13
Nominal CFM/ARI Rated CFM [L/s]	800/800 [378/378]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
ARI Net Cooling Capacity Btu [kW]	23,600 [6.91]	28,600 [8.38]	35,600 [10.43]	35,600 [10.43]
Net Sensible Capacity Btu [kW]	17,340 [5.08]	20,810 [6.1]	26,390 [7.73]	26,390 [7.73]
Net Latent Capacity Btu [kW]	6,260 [1.83]	7,790 [2.28]	9,210 [2.7]	9,210 [2.7]
Net System Power kW	2.12	2.58	3.15	3.15
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	10.56 [0.98]	10.56 [0.98]	14.8 [1.37]	14.8 [1.37]
Rows / FPI [FPcm]	1 / 18 [7]	1 / 18 [7]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.54 [0.51]	5.54 [0.51]	5.54 [0.51]	5.54 [0.51]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	2500 [1180]	2500 [1180]	2700 [1274]	2700 [1274]
No. Motors/HP	1 at 1/5 HP	1 at 1/5 HP	1 at 1/5 HP	1 at 1/5 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/9x7 [228.6x177.8]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/2	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/4	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	77.8 [2206]	76.8 [2177]	92.8 [2631]	92.8 [2631]
Weights				
Net Weight lbs. [kg]	381 [173]	399 [181]	412 [187]	412 [187]
Ship Weight lbs. [kg]	421 [191]	439 [199]	452 [205]	452 [205]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RSNL- Series	B042CK	B042JK	B048CK	B048JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	44,000 [12.89]	44,000 [12.89]	50,000 [14.65]	50,000 [14.65]
EER/SEER ²	11.2/13	11.2/13	11.2/13	11.2/13
Nominal CFM/ARI Rated CFM [L/s]	1400/1400 [661/661]	1400/1400 [661/661]	1600/1600 [755/755]	1600/1600 [755/755]
ARI Net Cooling Capacity Btu [kW]	42,000 [12.31]	42,000 [12.31]	48,000 [14.06]	48,000 [14.06]
Net Sensible Capacity Btu [kW]	30,510 [8.94]	30,510 [8.94]	33,990 [9.96]	33,990 [9.96]
Net Latent Capacity Btu [kW]	11,490 [3.37]	11,490 [3.37]	14,010 [4.1]	14,010 [4.1]
Net System Power kW	3.73	3.73	4.28	4.28
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.65 [1.55]	16.65 [1.55]	16.23 [1.51]	16.23 [1.51]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	7.39 [0.69]	7.39 [0.69]	7.39 [0.69]	7.39 [0.69]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3500 [1652]	3500 [1652]	3300 [1557]	3300 [1557]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	3/4
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	112 [3175]	112 [3175]	161.2 [4570]	161.2 [4570]
Weights				
Net Weight lbs. [kg]	422 [191]	422 [191]	452 [205]	461 [209]
Ship Weight lbs. [kg]	462 [210]	462 [210]	492 [223]	501 [227]

See Page 13 for Notes.

[] Designates Metric Conversions



NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RSNL- Series	C060CK	C060JK
Cooling Performance¹		
Gross Cooling Capacity Btu [kW]	59,500 [17.43]	59,500 [17.43]
EER/SEER ²	10.5/13	10.5/13
Nominal CFM/ARI Rated CFM [L/s]	1900/1850 [897/873]	1900/1850 [897/873]
ARI Net Cooling Capacity Btu [kW]	57,500 [16.85]	57,500 [16.85]
Net Sensible Capacity Btu [kW]	40,460 [11.85]	40,460 [11.85]
Net Latent Capacity Btu [kW]	17,040 [4.99]	17,040 [4.99]
Net System Power kW	5.48	5.48
Compressor		
No./Type	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³		
	78	78
Outdoor Coil—Fin Type		
Tube Type	Louvered	Louvered
Tube Size in. [mm] OD	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.23 [1.51]	16.23 [1.51]
Rows / FPI [FPcm]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type		
Tube Type	Louvered	Louvered
Tube Type	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	7.39 [0.69]	7.39 [0.69]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type		
	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1
CFM [L/s]	3300 [1557]	3300 [1557]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075
Indoor Fan—Type		
	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/12x9 [304.8x228.6]	1/12x9 [304.8x228.6]
Drive Type/No. Speeds	Direct/4	Direct/4
No. Motors	1	1
Motor HP	1	1
Motor RPM	1075	1075
Motor Frame Size	48	48
Filter—Type		
	Field Supplied	Field Supplied
Furnished	No	No
(No.) Size Recommended in. [mm]	(1)1x24x30 [25x610x762]	(1)1x24x30 [25x610x762]
Refrigerant Charge Oz. [g]		
	172.8 [4899]	172.8 [4899]
Weights		
Net Weight lbs. [kg]	532 [241]	532 [241]
Ship Weight lbs. [kg]	577 [262]	577 [262]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RSPL- Series	B024JK	B030JK	B036CK	B036JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	24,400 [7.15]	29,600 [8.67]	36,800 [10.78]	36,800 [10.78]
EER/SEER ²	12/14	12/14	12/14	12/14
Nominal CFM/ARI Rated CFM [L/s]	800/800 [378/378]	1000/1000 [472/472]	1200/1200 [566/566]	1200/1200 [566/566]
ARI Net Cooling Capacity Btu [kW]	24,000 [7.03]	29,200 [8.56]	36,000 [10.55]	36,000 [10.55]
Net Sensible Capacity Btu [kW]	17,790 [5.21]	21,700 [6.36]	26,420 [7.74]	26,420 [7.74]
Net Latent Capacity Btu [kW]	6,210 [1.82]	7,500 [2.2]	9,580 [2.81]	9,580 [2.81]
Net System Power kW	2.01	2.43	3	3
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	76	76
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	10.56 [0.98]	10.56 [0.98]	14.8 [1.37]	14.8 [1.37]
Rows / FPI [FPcm]	1 / 18 [7]	1 / 18 [7]	1 / 22 [9]	1 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	5.54 [0.51]	5.54 [0.51]	5.54 [0.51]	5.54 [0.51]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	2500 [1180]	2500 [1180]	2700 [1274]	2700 [1274]
No. Motors/HP	1 at 1/5 HP	1 at 1/5 HP	1 at 1/5 HP	1 at 1/5 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/9x7 [228.6x177.8]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/2	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/3	1/2	1/2	1/2
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x20x20 [25x508x508]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	77.8 [2206]	76.8 [2177]	92.8 [2631]	92.8 [2631]
Weights				
Net Weight lbs. [kg]	381 [173]	399 [181]	412 [187]	412 [187]
Ship Weight lbs. [kg]	421 [191]	439 [199]	452 [205]	452 [205]

See Page 13 for Notes.

[] Designates Metric Conversions



NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RSPL- Series	B042CK	B042JK	B048CK	B048JK
Cooling Performance¹				CONTINUED →
Gross Cooling Capacity Btu [kW]	44,000 [12.89]	44,000 [12.89]	50,500 [14.8]	50,500 [14.8]
EER/SEER ²	12/14	12/14	12/14	12/14
Nominal CFM/ARI Rated CFM [L/s]	1400/1400 [661/661]	1400/1400 [661/661]	1600/1600 [755/755]	1600/1600 [755/755]
ARI Net Cooling Capacity Btu [kW]	43,000 [12.6]	43,000 [12.6]	49,000 [14.36]	49,000 [14.36]
Net Sensible Capacity Btu [kW]	31,270 [9.16]	31,270 [9.16]	34,990 [10.25]	34,990 [10.25]
Net Latent Capacity Btu [kW]	11,730 [3.44]	11,730 [3.44]	14,010 [4.1]	14,010 [4.1]
Net System Power kW	3.58	3.58	4.08	4.08
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³	76	76	78	78
Outdoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm] OD	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	16.65 [1.55]	16.65 [1.55]	16.23 [1.51]	16.23 [1.51]
Rows / FPI [FPcm]	1 / 22 [9]	1 / 22 [9]	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type	Louvered	Louvered	Louvered	Louvered
Tube Type	Rifled	Rifled	Rifled	Rifled
Tube Size in. [mm]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]	0.375 [9.5]
Face Area sq. ft. [sq. m]	7.39 [0.69]	7.39 [0.69]	7.39 [0.69]	7.39 [0.69]
Rows / FPI [FPcm]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type	Propeller	Propeller	Propeller	Propeller
No. Used/Diameter in. [mm]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]	1/22 [558.8]
Drive Type/No. Speeds	Direct/1	Direct/1	Direct/1	Direct/1
CFM [L/s]	3500 [1652]	3500 [1652]	3300 [1557]	3300 [1557]
No. Motors/HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP	1 at 1/3 HP
Motor RPM	1075	1075	1075	1075
Indoor Fan—Type	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
No. Used/Diameter in. [mm]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]	1/10x9 [254x228.6]
Drive Type/No. Speeds	Direct/3	Direct/3	Direct/3	Direct/3
No. Motors	1	1	1	1
Motor HP	1/2	1/2	3/4	3/4
Motor RPM	1075	1075	1075	1075
Motor Frame Size	48	48	48	48
Filter—Type	Field Supplied	Field Supplied	Field Supplied	Field Supplied
Furnished	No	No	No	No
(No.) Size Recommended in. [mm]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]	(1)1x24x24 [25x610x610]
Refrigerant Charge Oz. [g]	112 [3175]	112 [3175]	161.2 [4570]	161.2 [4570]
Weights				
Net Weight lbs. [kg]	422 [191]	422 [191]	452 [205]	461 [209]
Ship Weight lbs. [kg]	462 [210]	462 [210]	492 [223]	501 [227]

See Page 13 for Notes.

[] Designates Metric Conversions

NOMINAL SIZES 2-5 TONS [7.0-17.6 kW]

Model RSPL- Series	B060CK	B060JK
Cooling Performance¹		
Gross Cooling Capacity Btu [kW]	59,500 [17.43]	59,500 [17.43]
EER/SEER ²	10.8/14	10.8/14
Nominal CFM/ARI Rated CFM [L/s]	1900/1850 [897/873]	1900/1850 [897/873]
ARI Net Cooling Capacity Btu [kW]	57,500 [16.85]	57,500 [16.85]
Net Sensible Capacity Btu [kW]	40,460 [11.85]	40,460 [11.85]
Net Latent Capacity Btu [kW]	17,040 [4.99]	17,040 [4.99]
Net System Power kW	5.32	5.32
Compressor		
No./Type	1/Scroll	1/Scroll
Outdoor Sound Rating (dB)³		
	78	78
Outdoor Coil—Fin Type		
Tube Type	Louvered	Louvered
Tube Size in. [mm] OD	Rifled	Rifled
Face Area sq. ft. [sq. m]	0.375 [9.5]	0.375 [9.5]
Rows / FPI [FPcm]	16.23 [1.51]	16.23 [1.51]
	2 / 22 [9]	2 / 22 [9]
Indoor Coil—Fin Type		
Tube Type	Louvered	Louvered
Tube Size in. [mm]	Rifled	Rifled
Face Area sq. ft. [sq. m]	0.375 [9.5]	0.375 [9.5]
Rows / FPI [FPcm]	7.39 [0.69]	7.39 [0.69]
	2 / 15 [6]	2 / 15 [6]
Refrigerant Control	TX Valves	TX Valves
Drain Connection No./Size in. [mm]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan—Type		
No. Used/Diameter in. [mm]	Propeller	Propeller
Drive Type/No. Speeds	1/22 [558.8]	1/22 [558.8]
CFM [L/s]	Direct/1	Direct/1
No. Motors/HP	3300 [1557]	3300 [1557]
Motor RPM	1 at 1/3 HP	1 at 1/3 HP
	1075	1075
Indoor Fan—Type		
No. Used/Diameter in. [mm]	FC Centrifugal	FC Centrifugal
Drive Type/No. Speeds	1/12x9 [304.8x228.6]	1/12x9 [304.8x228.6]
No. Motors	Direct/4	Direct/4
Motor HP	1	1
Motor RPM	1	1
Motor Frame Size	1075	1075
	48	48
Filter—Type		
Furnished	Field Supplied	Field Supplied
(No.) Size Recommended in. [mm]	No	No
	(1)1x24x30 [25x610x762]	(1)1x24x30 [25x610x762]
Refrigerant Charge Oz. [g]		
	172.8 [4899]	172.8 [4899]
Weights		
Net Weight lbs. [kg]	532 [241]	532 [241]
Ship Weight lbs. [kg]	577 [262]	577 [262]

See Page 13 for Notes.

[] Designates Metric Conversions



NOTES:

1. Cooling Performance is rated at 95° F ambient, 80° F entering dry bulb, 67° F entering wet bulb. Gross capacity does not include the effect of fan motor heat. ARI capacity is net and includes the effect of fan motor heat. Units are suitable for operation in CFM range shown in airflow tables. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on ARI Standard 210/240 or 360.
2. EER and/or SEER are rated at ARI conditions and in accordance with DOE test procedures.
3. Outdoor Sound Rating shown is tested in accordance with ARI Standard 270.

GROSS SYSTEMS PERFORMANCE DATA—B024

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			880 [415]	800 [378]	680 [321]	880 [415]	800 [378]	680 [321]	880 [415]	800 [378]	680 [321]
DR ①			.19	.17	.16	.19	.17	.16	.19	.17	.16
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	29.6 [8.67]	29.0 [8.50]	28.5 [8.35]	27.8 [8.15]	27.3 [8.00]	26.8 [7.85]	26.6 [7.80]	26.1 [7.65]	25.7 [7.53]
		Sens BTUH [kW]	17.6 [5.16]	16.8 [4.92]	16.0 [4.69]	20.7 [6.07]	19.8 [5.80]	18.8 [5.51]	22.1 [6.48]	21.2 [6.21]	20.2 [5.92]
		Power	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	80 [26.7]	Total BTUH [kW]	29.0 [8.50]	28.5 [8.35]	28.0 [8.21]	27.2 [7.97]	26.8 [7.85]	26.3 [7.71]	26.0 [7.62]	25.6 [7.50]	25.1 [7.36]
		Sens BTUH [kW]	17.3 [5.07]	16.5 [4.84]	15.7 [4.60]	20.3 [5.95]	19.4 [5.69]	18.5 [5.42]	21.8 [6.39]	20.8 [6.10]	19.9 [5.83]
		Power	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
	85 [29.4]	Total BTUH [kW]	28.3 [8.29]	27.8 [8.15]	27.3 [8.00]	26.5 [7.77]	26.1 [7.65]	25.6 [7.50]	25.3 [7.41]	24.9 [7.30]	24.4 [7.15]
		Sens BTUH [kW]	16.9 [4.95]	16.1 [4.72]	15.4 [4.51]	19.9 [5.83]	19.0 [5.57]	18.1 [5.30]	21.4 [6.27]	20.4 [5.98]	19.5 [5.71]
		Power	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
	90 [32.2]	Total BTUH [kW]	27.5 [8.06]	27.0 [7.91]	26.5 [7.77]	25.7 [7.53]	25.3 [7.41]	24.8 [7.27]	24.5 [7.18]	24.1 [7.06]	23.7 [6.95]
		Sens BTUH [kW]	16.4 [4.81]	15.7 [4.60]	14.9 [4.37]	19.5 [5.71]	18.6 [5.45]	17.7 [5.19]	20.9 [6.13]	20.0 [5.86]	19.1 [5.60]
		Power	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8

GROSS SYSTEMS PERFORMANCE DATA—B030

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1100 [519]	1000 [472]	850 [401]	1100 [519]	1000 [472]	850 [401]	1100 [519]	1000 [472]	850 [401]
DR ①			.22	.20	.19	.22	.20	.19	.22	.20	.19
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	36.7 [10.76]	36.0 [10.55]	35.4 [10.37]	34.5 [10.11]	33.9 [9.94]	33.3 [9.76]	33.1 [9.70]	32.6 [9.55]	32.0 [9.38]
		Sens BTUH [kW]	21.3 [6.24]	20.4 [5.98]	19.4 [5.69]	25.4 [7.44]	24.3 [7.12]	23.2 [6.80]	27.1 [7.94]	25.9 [7.59]	24.7 [7.24]
		Power	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	80 [26.7]	Total BTUH [kW]	35.8 [10.49]	35.2 [10.32]	34.5 [10.11]	33.6 [9.85]	33.0 [9.67]	32.4 [9.50]	32.2 [9.44]	31.7 [9.29]	31.1 [9.11]
		Sens BTUH [kW]	20.7 [6.07]	19.8 [5.80]	18.9 [5.54]	24.8 [7.27]	23.7 [6.95]	22.6 [6.62]	26.5 [7.77]	25.3 [7.41]	24.1 [7.06]
		Power	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
	85 [29.4]	Total BTUH [kW]	34.8 [10.20]	34.2 [10.02]	33.5 [9.82]	32.6 [9.55]	32.0 [9.38]	31.4 [9.20]	31.2 [9.14]	30.7 [9.00]	30.1 [8.82]
		Sens BTUH [kW]	20.1 [5.89]	19.2 [5.63]	18.3 [5.36]	24.2 [7.09]	23.1 [6.77]	22.0 [6.45]	25.9 [7.59]	24.7 [7.24]	23.6 [6.92]
		Power	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
	90 [32.2]	Total BTUH [kW]	33.7 [9.88]	33.1 [9.70]	32.5 [9.52]	31.5 [9.23]	30.9 [9.06]	30.3 [8.88]	30.1 [8.82]	29.6 [8.67]	29.0 [8.50]
		Sens BTUH [kW]	19.5 [5.71]	18.6 [5.45]	17.7 [5.19]	23.6 [6.92]	22.5 [6.59]	21.5 [6.30]	25.2 [7.39]	24.1 [7.06]	23.0 [6.74]
		Power	2.2	2.1	2.1	2.2	2.1	2.1	2.1	2.1	2.1

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA—B036

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1320 [623]	1200 [566]	1080 [510]	1320 [623]	1200 [566]	1080 [510]	1320 [623]	1200 [566]	1080 [510]
DR ①			.17	.15	.13	.17	.15	.13	.17	.15	.13
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	44.9 [13.16]	44.1 [12.92]	43.3 [12.69]	42.3 [12.40]	41.5 [12.16]	40.7 [11.93]	40.6 [11.90]	39.9 [11.69]	39.2 [11.49]
		Sens BTUH [kW]	26.5 [7.77]	25.3 [7.41]	24.1 [7.06]	31.6 [9.26]	30.2 [8.85]	28.8 [8.44]	33.5 [9.82]	32.0 [9.38]	30.5 [8.94]
		Power	2.3	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2
	80 [26.7]	Total BTUH [kW]	44.2 [12.95]	43.4 [12.72]	42.6 [12.48]	41.6 [12.19]	40.8 [11.96]	40.1 [11.75]	39.9 [11.69]	39.2 [11.49]	38.5 [11.28]
		Sens BTUH [kW]	26.2 [7.68]	25.0 [7.33]	23.8 [6.98]	31.3 [9.17]	29.9 [8.76]	28.5 [8.35]	33.2 [9.73]	31.7 [9.29]	30.2 [8.85]
		Power	2.4	2.4	2.4	2.4	2.4	2.3	2.4	2.4	2.3
	85 [29.4]	Total BTUH [kW]	43.1 [12.63]	42.4 [12.43]	41.6 [12.19]	40.5 [11.87]	39.8 [11.66]	39.1 [11.46]	38.9 [11.40]	38.2 [11.20]	37.5 [10.99]
		Sens BTUH [kW]	25.6 [7.50]	24.4 [7.15]	23.3 [6.83]	30.7 [9.00]	29.3 [8.59]	27.9 [8.18]	32.6 [9.55]	31.1 [9.11]	29.7 [8.70]
		Power	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
	90 [32.2]	Total BTUH [kW]	41.8 [12.25]	41.1 [12.05]	40.3 [11.81]	39.2 [11.49]	38.5 [11.28]	37.8 [11.08]	37.6 [11.02]	36.9 [10.81]	36.2 [10.61]
		Sens BTUH [kW]	24.8 [7.27]	23.7 [6.95]	22.6 [6.62]	29.9 [8.76]	28.6 [8.38]	27.3 [8.00]	31.8 [9.32]	30.4 [8.91]	29.0 [8.50]
		Power	2.7	2.7	2.6	2.7	2.6	2.6	2.7	2.6	2.6
95 [35]	Total BTUH [kW]	40.3 [11.81]	39.6 [11.61]	38.9 [11.40]	37.7 [11.05]	37.0 [10.84]	36.4 [10.67]	36.1 [10.58]	35.4 [10.37]	34.8 [10.20]	
	Sens BTUH [kW]	24.0 [7.03]	22.9 [6.71]	21.9 [6.42]	29.1 [8.53]	27.8 [8.15]	26.5 [7.77]	31.0 [9.09]	29.6 [8.67]	28.3 [8.29]	
	Power	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	
100 [37.8]	Total BTUH [kW]	38.8 [11.37]	38.1 [11.17]	37.4 [10.96]	36.1 [10.58]	35.5 [10.40]	34.8 [10.20]	34.5 [10.11]	33.9 [9.94]	33.3 [9.76]	
	Sens BTUH [kW]	23.2 [6.80]	22.1 [6.48]	21.1 [6.18]	28.3 [8.29]	27.0 [7.91]	25.8 [7.56]	30.2 [8.85]	28.8 [8.44]	27.5 [8.06]	
	Power	3.0	2.9	2.9	3.0	2.9	2.9	2.9	2.9	2.9	
105 [40.6]	Total BTUH [kW]	37.2 [10.90]	36.5 [10.70]	35.9 [10.52]	34.6 [10.14]	34.0 [9.96]	33.3 [9.76]	32.9 [9.64]	32.3 [9.47]	31.8 [9.32]	
	Sens BTUH [kW]	22.4 [6.56]	21.4 [6.27]	20.4 [5.98]	27.5 [8.06]	26.3 [7.71]	25.0 [7.33]	29.4 [8.62]	28.1 [8.24]	26.8 [7.85]	
	Power	3.1	3.1	3.1	3.1	3.1	3.0	3.1	3.1	3.0	
110 [43.3]	Total BTUH [kW]	35.7 [10.46]	35.1 [10.29]	34.5 [10.11]	33.1 [9.70]	32.5 [9.52]	31.9 [9.35]	31.5 [9.23]	30.9 [9.06]	30.4 [8.91]	
	Sens BTUH [kW]	21.8 [6.39]	20.8 [6.10]	19.8 [5.80]	26.9 [7.88]	25.7 [7.53]	24.5 [7.18]	28.8 [8.44]	27.5 [8.06]	26.2 [7.68]	
	Power	3.3	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
115 [46.1]	Total BTUH [kW]	34.5 [10.11]	33.9 [9.94]	33.3 [9.76]	31.9 [9.35]	31.3 [9.17]	30.7 [9.00]	30.2 [8.85]	29.7 [8.70]	29.2 [8.56]	
	Sens BTUH [kW]	21.3 [6.24]	20.4 [5.98]	19.4 [5.69]	26.4 [7.74]	25.2 [7.39]	24.1 [7.06]	28.3 [8.29]	27.1 [7.94]	25.8 [7.56]	
	Power	3.4	3.4	3.3	3.4	3.4	3.3	3.4	3.3	3.3	

GROSS SYSTEMS PERFORMANCE DATA—B042

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1540 [727]	1400 [661]	1260 [595]	1540 [727]	1400 [661]	1260 [595]	1540 [727]	1400 [661]	1260 [595]
DR ①			.18	.17	.15	.18	.17	.15	.18	.17	.15
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	53.6 [15.71]	52.6 [15.42]	51.7 [15.15]	50.3 [14.74]	49.4 [14.48]	48.5 [14.21]	48.6 [14.24]	47.7 [13.98]	46.8 [13.72]
		Sens BTUH [kW]	31.1 [9.11]	29.7 [8.70]	28.3 [8.29]	36.6 [10.73]	34.9 [10.23]	33.3 [9.76]	39.7 [11.63]	37.9 [11.11]	36.2 [10.61]
		Power	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6
	80 [26.7]	Total BTUH [kW]	52.1 [15.27]	51.1 [14.98]	50.2 [14.71]	48.7 [14.27]	47.9 [14.04]	47.0 [13.77]	47.0 [13.77]	46.2 [13.54]	45.4 [13.31]
		Sens BTUH [kW]	30.4 [8.91]	29.0 [8.50]	27.7 [8.12]	35.9 [10.52]	34.3 [10.05]	32.7 [9.58]	39.0 [11.43]	37.3 [10.93]	35.5 [10.40]
		Power	2.8	2.7	2.7	2.8	2.7	2.7	2.8	2.7	2.7
	85 [29.4]	Total BTUH [kW]	50.6 [14.83]	49.7 [14.57]	48.8 [14.30]	47.3 [13.86]	46.4 [13.60]	45.6 [13.36]	45.6 [13.36]	44.8 [13.13]	44.0 [12.90]
		Sens BTUH [kW]	29.7 [8.70]	28.4 [8.32]	27.1 [7.94]	35.2 [10.32]	33.6 [9.85]	32.0 [9.38]	38.3 [11.22]	36.6 [10.73]	34.9 [10.23]
		Power	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
	90 [32.2]	Total BTUH [kW]	49.3 [14.45]	48.4 [14.18]	47.5 [13.92]	45.9 [13.45]	45.1 [13.22]	44.3 [12.98]	44.2 [12.95]	43.4 [12.72]	42.6 [12.48]
Sens BTUH [kW]		29.0 [8.50]	27.7 [8.12]	26.4 [7.74]	34.5 [10.11]	32.9 [9.64]	31.4 [9.20]	37.6 [11.02]	35.9 [10.52]	34.3 [10.05]	
Power		3.1	3.1	3.0	3.1	3.1	3.0	3.1	3.1	3.0	
95 [35]	Total BTUH [kW]	47.9 [14.04]	47.1 [13.80]	46.2 [13.54]	44.6 [13.07]	43.8 [12.84]	43.0 [12.60]	42.9 [12.57]	42.1 [12.34]	41.4 [12.13]	
	Sens BTUH [kW]	28.3 [8.29]	27.1 [7.94]	25.8 [7.56]	33.8 [9.91]	32.3 [9.47]	30.8 [9.03]	36.9 [10.81]	35.3 [10.35]	33.6 [9.85]	
	Power	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	3.2	
100 [37.8]	Total BTUH [kW]	46.6 [13.66]	45.8 [13.42]	44.9 [13.16]	43.2 [12.66]	42.5 [12.46]	41.7 [12.22]	41.6 [12.19]	40.8 [11.96]	40.1 [11.75]	
	Sens BTUH [kW]	27.6 [8.09]	26.4 [7.74]	25.1 [7.36]	33.1 [9.70]	31.6 [9.26]	30.1 [8.82]	36.2 [10.61]	34.6 [10.14]	33.0 [9.67]	
	Power	3.4	3.4	3.4	3.4	3.4	3.3	3.4	3.4	3.3	
105 [40.6]	Total BTUH [kW]	45.3 [13.28]	44.4 [13.01]	43.6 [12.78]	41.9 [12.28]	41.2 [12.07]	40.4 [11.84]	40.2 [11.78]	39.5 [11.58]	38.8 [11.37]	
	Sens BTUH [kW]	26.9 [7.88]	25.7 [7.53]	24.5 [7.18]	32.3 [9.47]	30.9 [9.06]	29.4 [8.62]	35.5 [10.40]	33.9 [9.94]	32.3 [9.47]	
	Power	3.6	3.5	3.5	3.6	3.5	3.5	3.6	3.5	3.5	
110 [43.3]	Total BTUH [kW]	43.9 [12.87]	43.1 [12.63]	42.3 [12.40]	40.5 [11.87]	39.8 [11.66]	39.1 [11.46]	38.8 [11.37]	38.2 [11.20]	37.5 [10.99]	
	Sens BTUH [kW]	26.1 [7.65]	24.9 [7.30]	23.7 [6.95]	31.5 [9.23]	30.1 [8.82]	28.7 [8.41]	34.7 [10.17]	33.1 [9.70]	31.6 [9.26]	
	Power	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	
115 [46.1]	Total BTUH [kW]	42.4 [12.43]	41.7 [12.22]	40.9 [11.99]	39.1 [11.46]	38.4 [11.25]	37.7 [11.05]	37.4 [10.96]	36.7 [10.76]	36.1 [10.58]	
	Sens BTUH [kW]	25.2 [7.39]	24.1 [7.06]	23.0 [6.74]	30.7 [9.00]	29.3 [8.59]	28.0 [8.21]	33.8 [9.91]	32.3 [9.47]	30.8 [9.03]	
	Power	3.9	3.9	3.8	3.9	3.8	3.8	3.9	3.8	3.8	

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA—B048

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1760 [831]	1600 [755]	1440 [680]	1760 [831]	1600 [755]	1440 [680]	1760 [831]	1600 [755]	1440 [680]
DR ①			.22	.20	.19	.22	.20	.19	.22	.20	.19
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	61.6 [18.05]	60.5 [17.73]	59.4 [17.41]	58.0 [17.00]	57.0 [16.71]	55.9 [16.38]	55.3 [16.21]	54.3 [15.91]	53.3 [15.62]
		Sens BTUH [kW]	34.8 [10.20]	33.2 [9.73]	31.7 [9.29]	41.6 [12.19]	39.7 [11.63]	37.9 [11.11]	44.4 [13.01]	42.4 [12.43]	40.4 [11.84]
		Power	3.0	2.9	2.9	2.9	2.9	2.9	2.9	2.9	2.9
	80 [26.7]	Total BTUH [kW]	59.9 [17.55]	58.8 [17.23]	57.7 [16.91]	56.2 [16.47]	55.2 [16.18]	54.2 [15.88]	53.5 [15.68]	52.6 [15.42]	51.6 [15.12]
		Sens BTUH [kW]	33.7 [9.88]	32.2 [9.44]	30.7 [9.00]	40.5 [11.87]	38.7 [11.34]	36.9 [10.81]	43.3 [12.69]	41.4 [12.13]	39.4 [11.55]
		Power	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
	85 [29.4]	Total BTUH [kW]	58.2 [17.06]	57.1 [16.73]	56.1 [16.44]	54.5 [15.97]	53.5 [15.68]	52.6 [15.42]	51.8 [15.18]	50.9 [14.92]	49.9 [14.62]
		Sens BTUH [kW]	32.8 [9.61]	31.3 [9.17]	29.8 [8.73]	39.6 [11.61]	37.8 [11.08]	36.0 [10.55]	42.3 [12.40]	40.4 [11.84]	38.6 [11.31]
		Power	3.3	3.3	3.3	3.3	3.3	3.2	3.3	3.3	3.2
	90 [32.2]	Total BTUH [kW]	56.4 [16.53]	55.4 [16.24]	54.4 [15.94]	52.8 [15.47]	51.8 [15.18]	50.9 [14.92]	50.1 [14.68]	49.2 [14.42]	48.3 [14.16]
		Sens BTUH [kW]	31.9 [9.35]	30.4 [8.91]	29.0 [8.50]	38.7 [11.34]	36.9 [10.81]	35.2 [10.32]	41.4 [12.13]	39.6 [11.61]	37.7 [11.05]
		Power	3.5	3.5	3.4	3.5	3.4	3.4	3.5	3.4	3.4
	95 [35]	Total BTUH [kW]	54.7 [16.03]	53.7 [15.74]	52.7 [15.44]	51.0 [14.95]	50.1 [14.68]	49.2 [14.42]	48.3 [14.16]	47.4 [13.89]	46.6 [13.66]
		Sens BTUH [kW]	31.0 [9.09]	29.6 [8.67]	28.2 [8.26]	37.8 [11.08]	36.1 [10.58]	34.4 [10.08]	40.6 [11.90]	38.7 [11.34]	36.9 [10.81]
		Power	3.7	3.6	3.6	3.7	3.6	3.6	3.6	3.6	3.6
	100 [37.8]	Total BTUH [kW]	52.9 [15.50]	51.9 [15.21]	51.0 [14.95]	49.2 [14.42]	48.3 [14.16]	47.5 [13.92]	46.5 [13.63]	45.7 [13.39]	44.8 [13.13]
		Sens BTUH [kW]	30.1 [8.82]	28.8 [8.44]	27.4 [8.03]	36.9 [10.81]	35.3 [10.35]	33.6 [9.85]	39.7 [11.63]	37.9 [11.11]	36.1 [10.58]
		Power	3.9	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8
	105 [40.6]	Total BTUH [kW]	51.0 [14.95]	50.1 [14.68]	49.2 [14.42]	47.3 [13.86]	46.5 [13.63]	45.6 [13.36]	44.6 [13.07]	43.8 [12.84]	43.0 [12.60]
		Sens BTUH [kW]	29.2 [8.56]	27.9 [8.18]	26.6 [7.80]	36.0 [10.55]	34.4 [10.08]	32.8 [9.61]	38.8 [11.37]	37.0 [10.84]	35.3 [10.35]
		Power	4.0	4.0	4.0	4.0	4.0	3.9	4.0	4.0	3.9
	110 [43.3]	Total BTUH [kW]	49.0 [14.36]	48.1 [14.10]	47.2 [13.83]	45.3 [13.28]	44.5 [13.04]	43.7 [12.81]	42.6 [12.48]	41.9 [12.28]	41.1 [12.05]
		Sens BTUH [kW]	28.2 [8.26]	27.0 [7.91]	25.7 [7.53]	35.0 [10.26]	33.5 [9.82]	31.9 [9.35]	37.8 [11.08]	36.1 [10.58]	34.4 [10.08]
		Power	4.2	4.2	4.1	4.2	4.2	4.1	4.2	4.1	4.1
	115 [46.1]	Total BTUH [kW]	46.9 [13.75]	46.1 [13.51]	45.2 [13.25]	43.2 [12.66]	42.5 [12.46]	41.7 [12.22]	40.5 [11.87]	39.8 [11.66]	39.1 [11.46]
		Sens BTUH [kW]	27.1 [7.94]	25.9 [7.59]	24.7 [7.24]	33.9 [9.94]	32.4 [9.50]	30.9 [9.06]	36.7 [10.76]	35.1 [10.29]	33.4 [9.79]
		Power	4.4	4.4	4.3	4.4	4.3	4.3	4.4	4.3	4.3

GROSS SYSTEMS PERFORMANCE DATA—C060

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			2040 [963]	1850 [873]	1660 [783]	2040 [963]	1850 [873]	1660 [783]	2040 [963]	1850 [873]	1660 [783]
DR ①			.21	.20	.18	.21	.20	.18	.21	.20	.18
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	73.6 [21.57]	72.3 [21.19]	71.0 [20.81]	68.5 [20.08]	67.3 [19.72]	66.1 [19.37]	65.9 [19.31]	64.7 [18.96]	63.5 [18.61]
		Sens BTUH [kW]	42.2 [12.37]	40.3 [11.81]	38.4 [11.25]	49.1 [14.39]	46.9 [13.75]	44.7 [13.10]	53.3 [15.62]	50.9 [14.92]	48.5 [14.21]
		Power	4.0	3.9	3.9	3.9	3.8	3.8	3.8	3.8	3.7
	80 [26.7]	Total BTUH [kW]	71.3 [20.90]	70.0 [20.51]	68.7 [20.13]	66.2 [19.40]	65.0 [19.05]	63.9 [18.73]	63.6 [18.64]	62.4 [18.29]	61.3 [17.97]
		Sens BTUH [kW]	40.7 [11.93]	38.9 [11.40]	37.1 [10.87]	47.7 [13.98]	45.5 [13.33]	43.4 [12.72]	51.8 [15.18]	49.5 [14.51]	47.2 [13.83]
		Power	4.2	4.1	4.1	4.1	4.0	4.0	4.0	4.0	3.9
	85 [29.4]	Total BTUH [kW]	69.3 [20.31]	68.1 [19.96]	66.8 [19.58]	64.2 [18.82]	63.1 [18.49]	61.9 [18.14]	61.6 [18.05]	60.5 [17.73]	59.4 [17.41]
		Sens BTUH [kW]	39.5 [11.58]	37.8 [11.08]	36.0 [10.55]	46.5 [13.63]	44.4 [13.01]	42.3 [12.40]	50.6 [14.83]	48.3 [14.16]	46.1 [13.51]
		Power	4.4	4.4	4.3	4.3	4.3	4.2	4.2	4.2	4.1
	90 [32.2]	Total BTUH [kW]	67.5 [19.78]	66.3 [19.43]	65.1 [19.08]	62.5 [18.32]	61.3 [17.97]	60.2 [17.64]	59.8 [17.53]	58.7 [17.20]	57.6 [16.88]
		Sens BTUH [kW]	38.5 [11.28]	36.8 [10.79]	35.1 [10.29]	45.5 [13.33]	43.5 [12.75]	41.4 [12.13]	49.6 [14.54]	47.4 [13.89]	45.2 [13.25]
		Power	4.6	4.6	4.5	4.5	4.5	4.4	4.4	4.4	4.4
	95 [35]	Total BTUH [kW]	65.8 [19.28]	64.7 [18.96]	63.5 [18.61]	60.8 [17.82]	59.7 [17.50]	58.6 [17.17]	58.1 [17.03]	57.1 [16.73]	56.0 [16.41]
		Sens BTUH [kW]	37.7 [11.05]	36.0 [10.55]	34.3 [10.05]	44.6 [13.07]	42.6 [12.48]	40.7 [11.93]	48.8 [14.30]	46.6 [13.66]	44.4 [13.01]
		Power	4.8	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.6
	100 [37.8]	Total BTUH [kW]	64.2 [18.82]	63.0 [18.46]	61.9 [18.14]	59.1 [17.32]	58.0 [17.00]	57.0 [16.71]	56.4 [16.53]	55.4 [16.24]	54.4 [15.94]
		Sens BTUH [kW]	36.9 [10.81]	35.3 [10.35]	33.6 [9.85]	43.9 [12.87]	41.9 [12.28]	39.9 [11.69]	48.0 [14.07]	45.8 [13.42]	43.7 [12.81]
		Power	5.0	5.0	4.9	4.9	4.9	4.8	4.9	4.8	4.8
	105 [40.6]	Total BTUH [kW]	62.4 [18.29]	61.3 [17.97]	60.1 [17.61]	57.3 [16.79]	56.3 [16.50]	55.3 [16.21]	54.6 [16.00]	53.7 [15.74]	52.7 [15.44]
		Sens BTUH [kW]	36.1 [10.58]	34.5 [10.11]	32.9 [9.64]	43.1 [12.63]	41.2 [12.07]	39.2 [11.49]	47.2 [13.83]	45.1 [13.22]	43.0 [12.60]
		Power	5.2	5.2	5.2	5.1	5.1	5.1	5.1	5.0	5.0
	110 [43.3]	Total BTUH [kW]	60.4 [17.70]	59.3 [17.38]	58.2 [17.06]	55.3 [16.21]	54.3 [15.91]	53.4 [15.65]	52.7 [15.44]	51.7 [15.15]	50.8 [14.89]
		Sens BTUH [kW]	35.3 [10.35]	33.7 [9.88]	32.2 [9.44]	42.3 [12.40]	40.4 [11.84]	38.5 [11.28]	46.4 [13.60]	44.3 [12.98]	42.2 [12.37]
		Power	5.5	5.4	5.4	5.4	5.3	5.3	5.3	5.2	5.2
	115 [46.1]	Total BTUH [kW]	58.1 [17.03]	57.1 [16.73]	56.0 [16.41]	53.0 [15.53]	52.1 [15.27]	51.1 [14.98]	50.4 [14.77]	49.5 [14.51]	48.6 [14.24]
		Sens BTUH [kW]	34.4 [10.08]	32.8 [9.61]	31.3 [9.17]	41.3 [12.10]	39.5 [11.58]	37.6 [11.02]	45.4 [13.31]	43.4 [12.72]	41.4 [12.13]
		Power	5.7	5.6	5.6	5.6	5.5	5.5	5.5	5.4	5.4

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions



SYSTEMS PERFORMANCE—RSPL- SERIES

GROSS SYSTEMS PERFORMANCE DATA—B024

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			880 [415]	800 [378]	720 [340]	880 [415]	800 [378]	720 [340]	880 [415]	800 [378]	720 [340]
DR ①			.19	.17	.15	.19	.17	.15	.19	.17	.15
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	29.6 [8.67]	29.1 [8.53]	28.5 [8.35]	27.8 [8.15]	27.3 [8.00]	26.8 [7.85]	26.6 [7.80]	26.1 [7.65]	25.6 [7.50]
		Sens BTUH [kW]	17.6 [5.16]	16.8 [4.92]	16.0 [4.69]	20.7 [6.07]	19.8 [5.80]	18.9 [5.54]	22.2 [6.51]	21.2 [6.21]	20.2 [5.92]
		Power	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5	1.5
	80 [26.7]	Total BTUH [kW]	29.0 [8.50]	28.5 [8.35]	28.0 [8.21]	27.2 [7.97]	26.7 [7.83]	26.3 [7.71]	26.0 [7.62]	25.5 [7.47]	25.1 [7.36]
		Sens BTUH [kW]	17.3 [5.07]	16.5 [4.84]	15.7 [4.60]	20.4 [5.98]	19.5 [5.71]	18.5 [5.42]	21.9 [6.42]	20.9 [6.13]	19.9 [5.83]
		Power	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6	1.6
	85 [29.4]	Total BTUH [kW]	28.3 [8.29]	27.8 [8.15]	27.3 [8.00]	26.5 [7.77]	26.0 [7.62]	25.6 [7.50]	25.3 [7.41]	24.8 [7.27]	24.4 [7.15]
		Sens BTUH [kW]	16.8 [4.92]	16.1 [4.72]	15.3 [4.48]	19.9 [5.83]	19.1 [5.60]	18.2 [5.33]	21.4 [6.27]	20.5 [6.01]	19.5 [5.71]
		Power	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7	1.7
90 [32.2]	Total BTUH [kW]	27.5 [8.06]	27.0 [7.91]	26.5 [7.77]	25.7 [7.53]	25.2 [7.39]	24.8 [7.27]	24.5 [7.18]	24.0 [7.03]	23.6 [6.92]	
	Sens BTUH [kW]	16.4 [4.81]	15.6 [4.57]	14.9 [4.37]	19.5 [5.71]	18.6 [5.45]	17.7 [5.19]	21.0 [6.15]	20.0 [5.86]	19.1 [5.60]	
	Power	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	
95 [35]	Total BTUH [kW]	26.6 [7.80]	26.1 [7.65]	25.7 [7.53]	24.8 [7.27]	24.4 [7.15]	23.9 [7.00]	23.6 [6.92]	23.2 [6.80]	22.8 [6.68]	
	Sens BTUH [kW]	15.9 [4.66]	15.2 [4.45]	14.5 [4.25]	19.0 [5.57]	18.2 [5.33]	17.3 [5.07]	20.5 [6.01]	19.6 [5.74]	18.7 [5.48]	
	Power	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	
100 [37.8]	Total BTUH [kW]	25.7 [7.53]	25.2 [7.39]	24.8 [7.27]	23.9 [7.00]	23.5 [6.89]	23.1 [6.77]	22.7 [6.65]	22.3 [6.54]	21.9 [6.42]	
	Sens BTUH [kW]	15.5 [4.54]	14.8 [4.34]	14.1 [4.13]	18.6 [5.45]	17.7 [5.19]	16.9 [4.95]	20.1 [5.89]	19.2 [5.63]	18.3 [5.36]	
	Power	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	
105 [40.6]	Total BTUH [kW]	24.8 [7.27]	24.4 [7.15]	23.9 [7.00]	23.0 [6.74]	22.6 [6.62]	22.2 [6.51]	21.8 [6.39]	21.4 [6.27]	21.0 [6.15]	
	Sens BTUH [kW]	15.1 [4.43]	14.4 [4.22]	13.7 [4.02]	18.2 [5.33]	17.4 [5.10]	16.6 [4.86]	19.7 [5.77]	18.8 [5.51]	17.9 [5.25]	
	Power	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	
110 [43.3]	Total BTUH [kW]	24.0 [7.03]	23.5 [6.89]	23.1 [6.77]	22.2 [6.51]	21.8 [6.39]	21.4 [6.27]	21.0 [6.15]	20.6 [6.04]	20.2 [5.92]	
	Sens BTUH [kW]	14.8 [4.34]	14.2 [4.16]	13.5 [3.96]	17.9 [5.25]	17.1 [5.01]	16.3 [4.78]	19.4 [5.69]	18.6 [5.45]	17.7 [5.19]	
	Power	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	
115 [46.1]	Total BTUH [kW]	23.2 [6.80]	22.8 [6.68]	22.4 [6.56]	21.4 [6.27]	21.0 [6.15]	20.7 [6.07]	20.2 [5.92]	19.8 [5.80]	19.5 [5.71]	
	Sens BTUH [kW]	14.7 [4.31]	14.0 [4.10]	13.4 [3.93]	17.8 [5.22]	17.0 [4.98]	16.2 [4.75]	19.3 [5.66]	18.4 [5.39]	17.6 [5.16]	
	Power	2.3	2.3	2.2	2.3	2.3	2.2	2.3	2.3	2.2	

GROSS SYSTEMS PERFORMANCE DATA—B030

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1100 [519]	1000 [472]	900 [425]	1100 [519]	1000 [472]	900 [425]	1100 [519]	1000 [472]	900 [425]
DR ①			.20	.19	.17	.20	.19	.17	.20	.19	.17
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	36.7 [10.76]	36.1 [10.58]	35.4 [10.37]	34.5 [10.11]	33.9 [9.94]	33.3 [9.76]	33.1 [9.70]	32.5 [9.52]	32.0 [9.38]
		Sens BTUH [kW]	21.5 [6.30]	20.6 [6.04]	19.6 [5.74]	25.7 [7.53]	24.6 [7.21]	23.4 [6.86]	27.4 [8.03]	26.2 [7.68]	25.0 [7.33]
		Power	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8	1.8
	80 [26.7]	Total BTUH [kW]	35.8 [10.49]	35.2 [10.32]	34.5 [10.11]	33.6 [9.85]	33.0 [9.67]	32.4 [9.50]	32.2 [9.44]	31.6 [9.26]	31.1 [9.11]
		Sens BTUH [kW]	20.9 [6.13]	20.0 [5.86]	19.0 [5.57]	25.1 [7.36]	24.0 [7.03]	22.9 [6.71]	26.8 [7.85]	25.6 [7.50]	24.4 [7.15]
		Power	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9	1.9
	85 [29.4]	Total BTUH [kW]	34.8 [10.20]	34.2 [10.02]	33.5 [9.82]	32.6 [9.55]	32.0 [9.38]	31.4 [9.20]	31.2 [9.14]	30.6 [8.97]	30.1 [8.82]
		Sens BTUH [kW]	20.3 [5.95]	19.4 [5.69]	18.5 [5.42]	24.5 [7.18]	23.4 [6.86]	22.3 [6.54]	26.1 [7.65]	25.0 [7.33]	23.8 [6.98]
		Power	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
90 [32.2]	Total BTUH [kW]	33.7 [9.88]	33.1 [9.70]	32.5 [9.52]	31.4 [9.20]	30.9 [9.06]	30.3 [8.88]	30.1 [8.82]	29.5 [8.65]	29.0 [8.50]	
	Sens BTUH [kW]	19.7 [5.77]	18.8 [5.51]	17.9 [5.25]	23.8 [6.98]	22.8 [6.68]	21.7 [6.36]	25.5 [7.47]	24.4 [7.15]	23.3 [6.83]	
	Power	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	2.1	
95 [35]	Total BTUH [kW]	32.4 [9.50]	31.9 [9.35]	31.3 [9.17]	30.2 [8.85]	29.7 [8.70]	29.1 [8.53]	28.9 [8.47]	28.3 [8.29]	27.8 [8.15]	
	Sens BTUH [kW]	19.0 [5.57]	18.2 [5.33]	17.3 [5.07]	23.2 [6.80]	22.2 [6.51]	21.1 [6.18]	24.9 [7.30]	23.8 [6.98]	22.7 [6.65]	
	Power	2.3	2.2	2.2	2.3	2.2	2.2	2.2	2.2	2.2	
100 [37.8]	Total BTUH [kW]	31.2 [9.14]	30.6 [8.97]	30.1 [8.82]	28.9 [8.47]	28.4 [8.32]	27.9 [8.18]	27.6 [8.09]	27.1 [7.94]	26.6 [7.80]	
	Sens BTUH [kW]	18.4 [5.39]	17.6 [5.16]	16.7 [4.89]	22.6 [6.62]	21.6 [6.33]	20.5 [6.01]	24.2 [7.09]	23.2 [6.80]	22.1 [6.48]	
	Power	2.4	2.3	2.3	2.4	2.3	2.3	2.3	2.4	2.3	
105 [40.6]	Total BTUH [kW]	29.8 [8.73]	29.3 [8.59]	28.8 [8.44]	27.6 [8.09]	27.1 [7.94]	26.6 [7.80]	26.2 [7.68]	25.8 [7.56]	25.3 [7.41]	
	Sens BTUH [kW]	17.7 [5.19]	16.9 [4.95]	16.1 [4.72]	21.9 [6.42]	20.9 [6.13]	19.9 [5.83]	23.5 [6.89]	22.5 [6.59]	21.4 [6.27]	
	Power	2.5	2.5	2.4	2.5	2.5	2.4	2.5	2.4	2.4	
110 [43.3]	Total BTUH [kW]	28.5 [8.35]	27.9 [8.18]	27.4 [8.03]	26.2 [7.68]	25.8 [7.56]	25.3 [7.41]	24.9 [7.30]	24.4 [7.15]	24.0 [7.03]	
	Sens BTUH [kW]	16.9 [4.95]	16.2 [4.75]	15.4 [4.51]	21.1 [6.18]	20.2 [5.92]	19.2 [5.63]	22.8 [6.68]	21.8 [6.39]	20.8 [6.10]	
	Power	2.6	2.6	2.5	2.6	2.6	2.5	2.6	2.6	2.5	
115 [46.1]	Total BTUH [kW]	27.1 [7.94]	26.6 [7.80]	26.1 [7.65]	24.8 [7.27]	24.4 [7.15]	23.9 [7.00]	23.5 [6.89]	23.0 [6.74]	22.6 [6.62]	
	Sens BTUH [kW]	16.2 [4.75]	15.4 [4.51]	14.7 [4.31]	20.3 [5.95]	19.4 [5.69]	18.5 [5.42]	22.0 [6.45]	21.0 [6.15]	20.1 [5.89]	
	Power	2.7	2.7	2.6	2.7	2.7	2.6	2.7	2.7	2.6	

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA—B036

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1320 [623]	1200 [566]	1080 [510]	1320 [623]	1200 [566]	1080 [510]	1320 [623]	1200 [566]	1080 [510]
DR ①			.19	.18	.16	.19	.18	.16	.19	.18	.16
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	44.7 [13.10]	43.9 [12.87]	43.1 [12.63]	42.1 [12.34]	41.3 [12.10]	40.6 [11.90]	40.4 [11.84]	39.7 [11.63]	39.0 [11.43]
		Sens BTUH [kW]	25.8 [7.56]	24.7 [7.24]	23.5 [6.89]	31.0 [9.09]	29.6 [8.67]	28.2 [8.26]	32.9 [9.64]	31.5 [9.23]	30.0 [8.79]
		Power	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.2	2.1
	80 [26.7]	Total BTUH [kW]	44.0 [12.90]	43.3 [12.69]	42.5 [12.46]	41.4 [12.13]	40.6 [11.90]	39.9 [11.69]	39.7 [11.63]	39.0 [11.43]	38.3 [11.22]
		Sens BTUH [kW]	25.5 [7.47]	24.3 [7.12]	23.2 [6.80]	30.7 [9.00]	29.3 [8.59]	27.9 [8.18]	32.6 [9.55]	31.1 [9.11]	29.7 [8.70]
		Power	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3	2.3
	85 [29.4]	Total BTUH [kW]	43.0 [12.60]	42.2 [12.37]	41.4 [12.13]	40.3 [11.81]	39.6 [11.61]	38.9 [11.40]	38.6 [11.31]	38.0 [11.14]	37.3 [10.93]
		Sens BTUH [kW]	24.9 [7.30]	23.8 [6.98]	22.7 [6.65]	30.1 [8.82]	28.7 [8.41]	27.4 [8.03]	32.0 [9.38]	30.6 [8.97]	29.1 [8.53]
		Power	2.5	2.5	2.4	2.5	2.4	2.4	2.5	2.4	2.4
	90 [32.2]	Total BTUH [kW]	41.6 [12.19]	40.9 [11.99]	40.1 [11.75]	39.0 [11.43]	38.3 [11.22]	37.6 [11.02]	37.3 [10.93]	36.6 [10.73]	36.0 [10.55]
		Sens BTUH [kW]	24.1 [7.06]	23.1 [6.77]	22.0 [6.45]	29.3 [8.59]	28.0 [8.21]	26.7 [7.83]	31.2 [9.14]	29.9 [8.76]	28.5 [8.35]
		Power	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.5
OUTDOOR DRY BULB TEMPERATURE °F [°C]	95 [35]	Total BTUH [kW]	40.1 [11.75]	39.4 [11.55]	38.7 [11.34]	37.5 [10.99]	36.8 [10.79]	36.1 [10.58]	35.8 [10.49]	35.2 [10.32]	34.5 [10.11]
		Sens BTUH [kW]	23.3 [6.83]	22.3 [6.54]	21.2 [6.21]	28.5 [8.35]	27.2 [7.97]	25.9 [7.59]	30.4 [8.91]	29.1 [8.53]	27.7 [8.12]
		Power	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7	2.7
	100 [37.8]	Total BTUH [kW]	38.5 [11.28]	37.8 [11.08]	37.1 [10.87]	35.9 [10.52]	35.2 [10.32]	34.6 [10.14]	34.2 [10.02]	33.6 [9.85]	33.0 [9.67]
		Sens BTUH [kW]	22.4 [6.56]	21.4 [6.27]	20.4 [5.98]	27.6 [8.09]	26.4 [7.74]	25.2 [7.39]	29.6 [8.67]	28.2 [8.26]	26.9 [7.88]
		Power	2.9	2.9	2.8	2.9	2.8	2.8	2.9	2.8	2.8
	105 [40.6]	Total BTUH [kW]	36.9 [10.81]	36.3 [10.64]	35.6 [10.43]	34.3 [10.05]	33.7 [9.88]	33.0 [9.67]	32.6 [9.55]	32.0 [9.38]	31.4 [9.20]
		Sens BTUH [kW]	21.6 [6.33]	20.7 [6.07]	19.7 [5.77]	26.8 [7.85]	25.6 [7.50]	24.4 [7.15]	28.8 [8.44]	27.5 [8.06]	26.2 [7.68]
		Power	3.0	3.0	3.0	3.0	3.0	3.0	3.0	3.0	2.9
	110 [43.3]	Total BTUH [kW]	35.5 [10.40]	34.8 [10.20]	34.2 [10.02]	32.8 [9.61]	32.2 [9.44]	31.6 [9.26]	31.1 [9.11]	30.6 [8.97]	30.0 [8.79]
		Sens BTUH [kW]	21.0 [6.15]	20.1 [5.89]	19.1 [5.60]	26.2 [7.68]	25.0 [7.33]	23.8 [6.98]	28.1 [8.24]	26.9 [7.88]	25.6 [7.50]
		Power	3.2	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
OUTDOOR DRY BULB TEMPERATURE °F [°C]	115 [46.1]	Total BTUH [kW]	34.2 [10.02]	33.6 [9.85]	33.0 [9.67]	31.5 [9.23]	31.0 [9.09]	30.4 [8.91]	29.9 [8.76]	29.3 [8.59]	28.8 [8.44]
		Sens BTUH [kW]	20.6 [6.04]	19.6 [5.74]	18.7 [5.48]	25.7 [7.53]	24.6 [7.21]	23.4 [6.86]	27.7 [8.12]	26.4 [7.74]	25.2 [7.39]
		Power	3.3	3.3	3.2	3.3	3.2	3.2	3.3	3.2	3.2

GROSS SYSTEMS PERFORMANCE DATA—B042

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1540 [727]	1400 [661]	1260 [595]	1540 [727]	1400 [661]	1260 [595]	1540 [727]	1400 [661]	1260 [595]
DR ①			.19	.17	.16	.19	.17	.16	.19	.17	.16
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	54.0 [15.83]	53.0 [15.53]	52.1 [15.27]	50.6 [14.83]	49.7 [14.57]	48.8 [14.30]	48.9 [14.33]	48.0 [14.07]	47.2 [13.83]
		Sens BTUH [kW]	31.1 [9.11]	29.7 [8.70]	28.3 [8.29]	36.6 [10.73]	35.0 [10.26]	33.4 [9.79]	39.8 [11.66]	38.1 [11.17]	36.3 [10.64]
		Power	2.7	2.7	2.6	2.7	2.6	2.6	2.7	2.6	2.6
	80 [26.7]	Total BTUH [kW]	52.4 [15.36]	51.5 [15.09]	50.6 [14.83]	49.0 [14.36]	48.2 [14.13]	47.3 [13.86]	47.3 [13.86]	46.5 [13.63]	45.7 [13.39]
		Sens BTUH [kW]	30.4 [8.91]	29.0 [8.50]	27.7 [8.12]	35.9 [10.52]	34.3 [10.05]	32.7 [9.58]	39.1 [11.46]	37.4 [10.96]	35.6 [10.43]
		Power	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8	2.8
	85 [29.4]	Total BTUH [kW]	51.0 [14.95]	50.1 [14.68]	49.2 [14.42]	47.6 [13.95]	46.7 [13.69]	45.9 [13.45]	45.9 [13.45]	45.1 [13.22]	44.2 [12.95]
		Sens BTUH [kW]	29.7 [8.70]	28.3 [8.29]	27.0 [7.91]	35.2 [10.32]	33.6 [9.85]	32.1 [9.41]	38.4 [11.25]	36.7 [10.76]	35.0 [10.26]
		Power	3.0	3.0	2.9	3.0	2.9	2.9	3.0	2.9	2.9
	90 [32.2]	Total BTUH [kW]	49.6 [14.54]	48.7 [14.27]	47.8 [14.01]	46.2 [13.54]	45.4 [13.31]	44.5 [13.04]	44.5 [13.04]	43.7 [12.81]	42.9 [12.57]
		Sens BTUH [kW]	29.0 [8.50]	27.7 [8.12]	26.4 [7.74]	34.5 [10.11]	33.0 [9.67]	31.4 [9.20]	37.7 [11.05]	36.0 [10.55]	34.3 [10.05]
		Power	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1	3.1
OUTDOOR DRY BULB TEMPERATURE °F [°C]	95 [35]	Total BTUH [kW]	48.2 [14.13]	47.4 [13.89]	46.5 [13.63]	44.8 [13.13]	44.0 [12.90]	43.2 [12.66]	43.1 [12.63]	42.4 [12.43]	41.6 [12.19]
		Sens BTUH [kW]	28.3 [8.29]	27.0 [7.91]	25.7 [7.53]	33.8 [9.91]	32.3 [9.47]	30.8 [9.03]	37.0 [10.84]	35.3 [10.35]	33.7 [9.88]
		Power	3.3	3.3	3.2	3.3	3.2	3.2	3.3	3.2	3.2
	100 [37.8]	Total BTUH [kW]	46.9 [13.75]	46.0 [13.48]	45.2 [13.25]	43.5 [12.75]	42.7 [12.51]	41.9 [12.28]	41.8 [12.25]	41.0 [12.02]	40.3 [11.81]
		Sens BTUH [kW]	27.5 [8.06]	26.3 [7.71]	25.1 [7.36]	33.1 [9.70]	31.6 [9.26]	30.1 [8.82]	36.3 [10.64]	34.7 [10.17]	33.0 [9.67]
		Power	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4	3.4
	105 [40.6]	Total BTUH [kW]	45.5 [13.33]	44.7 [13.10]	43.9 [12.87]	42.1 [12.34]	41.4 [12.13]	40.6 [11.90]	40.4 [11.84]	39.7 [11.63]	39.0 [11.43]
		Sens BTUH [kW]	26.8 [7.85]	25.6 [7.50]	24.4 [7.15]	32.3 [9.47]	30.9 [9.06]	29.4 [8.62]	35.5 [10.40]	33.9 [9.94]	32.3 [9.47]
		Power	3.6	3.6	3.5	3.6	3.5	3.5	3.6	3.5	3.5
	110 [43.3]	Total BTUH [kW]	44.1 [12.92]	43.3 [12.69]	42.5 [12.46]	40.7 [11.93]	40.0 [11.72]	39.3 [11.52]	39.0 [11.43]	38.3 [11.22]	37.6 [11.02]
		Sens BTUH [kW]	26.0 [7.62]	24.8 [7.27]	23.7 [6.95]	31.5 [9.23]	30.1 [8.82]	28.7 [8.41]	34.7 [10.17]	33.2 [9.73]	31.6 [9.26]
		Power	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7	3.7
OUTDOOR DRY BULB TEMPERATURE °F [°C]	115 [46.1]	Total BTUH [kW]	42.7 [12.51]	41.9 [12.28]	41.1 [12.05]	39.3 [11.52]	38.6 [11.31]	37.9 [11.11]	37.6 [11.02]	36.9 [10.81]	36.2 [10.61]
		Sens BTUH [kW]	25.1 [7.36]	24.0 [7.03]	22.9 [6.71]	30.7 [9.00]	29.3 [8.59]	27.9 [8.18]	33.8 [9.91]	32.3 [9.47]	30.8 [9.03]
		Power	3.9	3.9	3.8	3.9	3.8	3.8	3.9	3.8	3.8

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions



SYSTEMS PERFORMANCE—RSPL- SERIES

GROSS SYSTEMS PERFORMANCE DATA—B048

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			1760 [831]	1600 [755]	1440 [680]	1760 [831]	1600 [755]	1440 [680]	1760 [831]	1600 [755]	1440 [680]
DR ①			.21	.20	.18	.21	.20	.18	.21	.20	.18
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	62.0 [18.17]	60.9 [17.85]	59.8 [17.53]	58.3 [17.09]	57.3 [16.79]	56.3 [16.50]	55.6 [16.29]	54.6 [16.00]	53.6 [15.71]
		Sens BTUH [kW]	35.0 [10.26]	33.4 [9.79]	31.9 [9.35]	41.9 [12.28]	40.0 [11.72]	38.1 [11.17]	44.7 [13.10]	42.7 [12.51]	40.7 [11.93]
		Power	3.0	3.0	3.0	3.0	3.0	2.9	3.0	3.0	2.9
	80 [26.7]	Total BTUH [kW]	60.3 [17.67]	59.2 [17.35]	58.1 [17.03]	56.6 [16.59]	55.5 [16.27]	54.5 [15.97]	53.8 [15.77]	52.8 [15.47]	51.9 [15.21]
		Sens BTUH [kW]	33.9 [9.94]	32.4 [9.50]	30.9 [9.06]	40.8 [11.96]	39.0 [11.43]	37.2 [10.90]	43.6 [12.78]	41.7 [12.22]	39.7 [11.63]
		Power	3.2	3.2	3.1	3.2	3.1	3.1	3.2	3.1	3.1
	85 [29.4]	Total BTUH [kW]	58.5 [17.14]	57.5 [16.85]	56.4 [16.53]	54.8 [16.06]	53.8 [15.77]	52.8 [15.47]	52.0 [15.24]	51.1 [14.98]	50.2 [14.71]
		Sens BTUH [kW]	32.9 [9.64]	31.5 [9.23]	30.0 [8.79]	39.8 [11.66]	38.1 [11.17]	36.3 [10.64]	42.6 [12.48]	40.7 [11.93]	38.8 [11.37]
		Power	3.4	3.3	3.3	3.3	3.3	3.3	3.3	3.3	3.3
	90 [32.2]	Total BTUH [kW]	56.7 [16.62]	55.7 [16.32]	54.7 [16.03]	53.0 [15.53]	52.1 [15.27]	51.1 [14.98]	50.3 [14.74]	49.4 [14.48]	48.5 [14.21]
Sens BTUH [kW]		32.0 [9.38]	30.6 [8.97]	29.2 [8.56]	38.9 [11.40]	37.2 [10.90]	35.4 [10.37]	41.7 [12.22]	39.9 [11.69]	38.0 [11.14]	
Power		3.5	3.5	3.5	3.5	3.5	3.4	3.5	3.5	3.4	
95 [35]	Total BTUH [kW]	55.0 [16.12]	54.0 [15.83]	53.0 [15.53]	51.3 [15.03]	50.3 [14.74]	49.4 [14.48]	48.5 [14.21]	47.6 [13.95]	46.8 [13.72]	
	Sens BTUH [kW]	31.1 [9.11]	29.7 [8.70]	28.3 [8.29]	38.0 [11.14]	36.3 [10.64]	34.6 [10.14]	40.8 [11.96]	39.0 [11.43]	37.2 [10.90]	
	Power	3.7	3.7	3.6	3.7	3.6	3.6	3.7	3.6	3.6	
100 [37.8]	Total BTUH [kW]	53.1 [15.56]	52.2 [15.30]	51.2 [15.01]	49.4 [14.48]	48.5 [14.21]	47.7 [13.98]	46.7 [13.69]	45.8 [13.42]	45.0 [13.19]	
	Sens BTUH [kW]	30.2 [8.85]	28.9 [8.47]	27.5 [8.06]	37.1 [10.87]	35.5 [10.40]	33.8 [9.91]	40.0 [11.72]	38.2 [11.20]	36.4 [10.67]	
	Power	3.9	3.8	3.8	3.8	3.8	3.8	3.8	3.8	3.8	
105 [40.6]	Total BTUH [kW]	51.2 [15.01]	50.3 [14.74]	49.4 [14.48]	47.5 [13.92]	46.7 [13.69]	45.8 [13.42]	44.8 [13.13]	44.0 [12.90]	43.2 [12.66]	
	Sens BTUH [kW]	29.3 [8.59]	28.0 [8.21]	26.7 [7.83]	36.2 [10.61]	34.6 [10.14]	33.0 [9.67]	39.0 [11.43]	37.3 [10.93]	35.5 [10.40]	
	Power	4.0	4.0	4.0	4.0	4.0	3.9	4.0	4.0	3.9	
110 [43.3]	Total BTUH [kW]	49.2 [14.42]	48.3 [14.16]	47.5 [13.92]	45.5 [13.33]	44.7 [13.10]	43.9 [12.87]	42.8 [12.54]	42.0 [12.31]	41.2 [12.07]	
	Sens BTUH [kW]	28.3 [8.29]	27.1 [7.94]	25.8 [7.56]	35.2 [10.32]	33.6 [9.85]	32.1 [9.41]	38.0 [11.14]	36.3 [10.64]	34.6 [10.14]	
	Power	4.2	4.2	4.1	4.2	4.1	4.1	4.2	4.1	4.1	
115 [46.1]	Total BTUH [kW]	47.1 [13.80]	46.2 [13.54]	45.4 [13.31]	43.4 [12.72]	42.6 [12.48]	41.8 [12.25]	40.6 [11.90]	39.9 [11.69]	39.2 [11.49]	
	Sens BTUH [kW]	27.2 [7.97]	26.0 [7.62]	24.8 [7.27]	34.1 [9.99]	32.6 [9.55]	31.1 [9.11]	36.9 [10.81]	35.3 [10.35]	33.6 [9.85]	
	Power	4.4	4.3	4.3	4.3	4.3	4.3	4.3	4.3	4.3	

GROSS SYSTEMS PERFORMANCE DATA—B060

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C] ①			63°F [17.2°C]		
CFM [L/s]			2040 [963]	1850 [873]	1660 [783]	2040 [963]	1850 [873]	1660 [783]	2040 [963]	1850 [873]	1660 [783]
DR ①			.21	.20	.18	.21	.20	.18	.21	.20	.18
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total BTUH [kW]	73.6 [21.57]	72.3 [21.19]	71.0 [20.81]	68.5 [20.08]	67.3 [19.72]	66.1 [19.37]	65.9 [19.31]	64.7 [18.96]	63.5 [18.61]
		Sens BTUH [kW]	42.2 [12.37]	40.3 [11.81]	38.4 [11.25]	49.1 [14.39]	46.9 [13.75]	44.7 [13.10]	53.3 [15.62]	50.9 [14.92]	48.5 [14.21]
		Power	4.0	3.9	3.9	3.9	3.8	3.8	3.8	3.8	3.7
	80 [26.7]	Total BTUH [kW]	71.3 [20.90]	70.0 [20.51]	68.7 [20.13]	66.2 [19.40]	65.0 [19.05]	63.9 [18.73]	63.6 [18.64]	62.4 [18.29]	61.3 [17.97]
		Sens BTUH [kW]	40.7 [11.93]	38.9 [11.40]	37.1 [10.87]	47.7 [13.98]	45.5 [13.33]	43.4 [12.72]	51.8 [15.18]	49.5 [14.51]	47.2 [13.83]
		Power	4.2	4.1	4.1	4.1	4.0	4.0	4.0	4.0	3.9
	85 [29.4]	Total BTUH [kW]	69.3 [20.31]	68.1 [19.96]	66.8 [19.58]	64.2 [18.82]	63.1 [18.49]	61.9 [18.14]	61.6 [18.05]	60.5 [17.73]	59.4 [17.41]
		Sens BTUH [kW]	39.5 [11.58]	37.8 [11.08]	36.0 [10.55]	46.5 [13.63]	44.4 [13.01]	42.3 [12.40]	50.6 [14.83]	48.3 [14.16]	46.1 [13.51]
		Power	4.4	4.4	4.3	4.3	4.3	4.2	4.2	4.2	4.1
	90 [32.2]	Total BTUH [kW]	67.5 [19.78]	66.3 [19.43]	65.1 [19.08]	62.5 [18.32]	61.3 [17.97]	60.2 [17.64]	59.8 [17.53]	58.7 [17.20]	57.6 [16.88]
Sens BTUH [kW]		38.5 [11.28]	36.8 [10.79]	35.1 [10.29]	45.5 [13.33]	43.5 [12.75]	41.4 [12.13]	49.6 [14.54]	47.4 [13.89]	45.2 [13.25]	
Power		4.6	4.6	4.5	4.5	4.5	4.4	4.4	4.4	4.4	
95 [35]	Total BTUH [kW]	65.8 [19.28]	64.7 [18.96]	63.5 [18.61]	60.8 [17.82]	59.7 [17.50]	58.6 [17.17]	58.1 [17.03]	57.1 [16.73]	56.0 [16.41]	
	Sens BTUH [kW]	37.7 [11.05]	36.0 [10.55]	34.3 [10.05]	44.6 [13.07]	42.6 [12.48]	40.7 [11.93]	48.8 [14.30]	46.6 [13.66]	44.4 [13.01]	
	Power	4.8	4.8	4.7	4.7	4.7	4.6	4.6	4.6	4.6	
100 [37.8]	Total BTUH [kW]	64.2 [18.82]	63.0 [18.46]	61.9 [18.14]	59.1 [17.32]	58.0 [17.00]	57.0 [16.71]	56.4 [16.53]	55.4 [16.24]	54.4 [15.94]	
	Sens BTUH [kW]	36.9 [10.81]	35.3 [10.35]	33.6 [9.85]	43.9 [12.87]	41.9 [12.28]	39.9 [11.69]	48.0 [14.07]	45.8 [13.42]	43.7 [12.81]	
	Power	5.0	5.0	4.9	4.9	4.9	4.8	4.9	4.8	4.8	
105 [40.6]	Total BTUH [kW]	62.4 [18.29]	61.3 [17.97]	60.1 [17.61]	57.3 [16.79]	56.3 [16.50]	55.3 [16.21]	54.6 [16.00]	53.7 [15.74]	52.7 [15.44]	
	Sens BTUH [kW]	36.1 [10.58]	34.5 [10.11]	32.9 [9.64]	43.1 [12.63]	41.2 [12.07]	39.2 [11.49]	47.2 [13.83]	45.1 [13.22]	43.0 [12.60]	
	Power	5.2	5.2	5.2	5.1	5.1	5.1	5.1	5.0	5.0	
110 [43.3]	Total BTUH [kW]	60.4 [17.70]	59.3 [17.38]	58.2 [17.06]	55.3 [16.21]	54.3 [15.91]	53.4 [15.65]	52.7 [15.44]	51.7 [15.15]	50.8 [14.89]	
	Sens BTUH [kW]	35.3 [10.35]	33.7 [9.88]	32.2 [9.44]	42.3 [12.40]	40.4 [11.84]	38.5 [11.28]	46.4 [13.60]	44.3 [12.98]	42.2 [12.37]	
	Power	5.5	5.4	5.4	5.4	5.3	5.3	5.3	5.2	5.2	
115 [46.1]	Total BTUH [kW]	58.1 [17.03]	57.1 [16.73]	56.0 [16.41]	53.0 [15.53]	52.1 [15.27]	51.1 [14.98]	50.4 [14.77]	49.5 [14.51]	48.6 [14.24]	
	Sens BTUH [kW]	34.4 [10.08]	32.8 [9.61]	31.3 [9.17]	41.3 [12.10]	39.5 [11.58]	37.6 [11.02]	45.4 [13.31]	43.4 [12.72]	41.4 [12.13]	
	Power	5.7	5.6	5.6	5.6	5.5	5.5	5.5	5.4	5.4	

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 BTUH
Sens —Sensible capacity x 1000 BTUH
Power—KW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE—208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	External Static Pressure—Inches W.C. [kPa] Side Discharge—Wet Coil							
	Cool	Heat			0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	
2.0 [7.03]	High	High	9 x 7 Blower 1/4 HP [186 W] 2 Speed (PSC Motor)	Low	CFM [l/s]	657 [310]	634 [299]	602 [284]	560 [264]	505 [238]	435 [205]	
					RPM	785	870	905	940	980	1020	
					Watts	214	203	191	171	193	149	
2.5 [8.79]	Low	Low	10 x 9 Blower 1/2 HP [372 W] 3 Speed (PSC Motor)	Low	CFM [l/s]	1076 [508]	1032 [487]	996 [470]	950 [448]	896 [423]	832 [393]	
					RPM	730	820	865	905	940	975	
					Watts	356	341	331	320	305	287	
3.0 [10.55]	Med.	Med.	10 x 9 Blower 1/2 HP [372 W] 3 Speed (PSC Motor)	Med.	CFM [l/s]	1222 [577]	1179 [556]	1162 [548]	1137 [537]	1097 [518]	1033 [488]	
					RPM	765	855	890	920	960	995	
					Watts	423	407	397	386	370	351	
3.5 [12.31]	High	High	10 x 9 Blower 1/2 HP [372 W] 3 Speed (PSC Motor)	High	CFM [l/s]	1514 [715]	1415 [668]	1370 [647]	1322 [624]	1266 [597]	1197 [565]	
					RPM	895	965	985	1005	1025	1045	
					Watts	538	493	473	454	434	412	
4.0 [14.07]	Med.	Med.	10 x 9 Blower 3/4 HP [559 W] 3 Speed (PSC Motor)	Low	CFM [l/s]	1204 [568]	1191 [562]	1171 [553]	1143 [539]	1107 [522]	1065 [503]	
					RPM	734	886	923	959	988	1016	
					Watts	476	450	427	403	380	363	
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Med.	CFM [l/s]	1674 [790]	1566 [739]	1511 [713]	1451 [685]	1384 [653]	1305 [616]	
					RPM	997	1040	1058	1076	1088	1100	
					Watts	625	567	539	512	484	455	
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	High	CFM [l/s]	1843 [870]	1693 [799]	1627 [768]	1560 [736]	1485 [701]	1398 [660]	
					RPM	1085	1102	1110	1118	1126	1134	
					Watts	699	632	604	576	548	517	
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Heat Low (Tap 1)	CFM [l/s]	1310 [618]	1238 [584]	1204 [568]	1149 [542]	1104 [521]	1035 [488]	
					RPM	731	789	826	857	894	937	
					Watts	218	237	250	258	270	280	
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Heat High (Tap 2)	CFM [l/s]	1418 [669]	1362 [638]	1307 [617]	1270 [599]	1221 [576]	1180 [557]	
					RPM	774	829	860	892	922	955	
					Watts	267	287	295	308	316	328	
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Cool Low (Tap 3)	CFM [l/s]	1858 [877]	1782 [841]	1752 [827]	1714 [809]	1678 [792]	1640 [774]	
					RPM	944	994	1019	1041	1072	1089	
					Watts	541	564	578	586	598	611	
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Cool High (Tap 4)	CFM [l/s]	2017 [952]	1949 [920]	1909 [901]	1879 [887]	1843 [870]	1792 [846]	
					RPM	1018	1070	1076	1112	1124	1147	
					Watts	690	711	723	735	741	742	

NOTE: 5 ton 1st & 2nd stage cooling speeds must be changed to low to achieve ARI performance.

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE—208 VOLTS (cont.)

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)									
CFM [L/s]	600 [283]	800 [378]	1000 [472]	1200 [556]	1440 [661]	1600 [755]	1800 [850]	2000 [944]	
Pressure Drop—Includes W.C. [kPa]	.00	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]	.15 [.037]	.17 [.042]	
MINIMUM RECOMMENDED FILTER SIZES									
Nominal Cooling Capacity Tons [kW]	2.0 [7.03]			2.5 [8.79] – 4.0 [14.07]			5.0 [17.59]		
Minimum Filter Size—Inches [mm]	20 x 20 x 1 [508 x 508 x 25]			24 x 24 x 1 [610 x 610 x 25]			24 x 30 x 1 [610 x 762 x 1]		

[] Designates Metric Conversions

INDOOR AIRFLOW PERFORMANCE—230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	External Static Pressure—Inches W.C. [kPa] Side Discharge—Wet Coil							
	Cool	Heat			0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	
2.0 [7.03]	High	High	9 x 7 Blower 1/4 HP [186 W] 2 Speed (PSC Motor)	Low	CFM [l/s]	771 [364]	751 [354]	725 [342]	691 [326]	645 [304]	584 [276]	546 [258]
					RPM	825	870	910	950	985	1010	1030
				High	Watts	253	242	230	217	204	189	181
					CFM [l/s]	946 [446]	922 [435]	882 [415]	830 [392]	769 [363]	701 [331]	630 [298]
2.5 [8.79]	Low	Low	10 x 9 Blower 1/2 HP [372 W] 3 Speed (PSC Motor)	Low	RPM	990	1015	1035	1055	1070	1085	1100
					Watts	315	303	288	273	257	241	226
				Med.	CFM [l/s]	1206 [569]	1182 [558]	1157 [546]	1128 [532]	1091 [515]	1044 [493]	983 [464]
					RPM	760	815	870	910	950	975	1000
3.0 [10.55]	Med.	Med.	10 x 9 Blower 1/2 HP [372 W] 3 Speed (PSC Motor)	Med.	Watts	419	406	394	381	368	353	334
					CFM [l/s]	1411 [666]	1368 [646]	1327 [626]	1285 [606]	1238 [584]	1183 [558]	1116 [527]
				High	RPM	865	900	935	970	1000	1020	1035
					Watts	498	481	464	447	430	411	391
3.5 [12.31]	High	High	10 x 9 Blower 3/4 HP [559 W] 3 Speed (PSC Motor)	High	CFM [l/s]	1641 [774]	1577 [744]	1515 [715]	1455 [687]	1393 [657]	1329 [627]	1262 [596]
					RPM	980	1000	1020	1035	1050	1065	1080
				Low	Watts	589	565	543	523	503	481	456
					CFM [l/s]	1412 [666]	1395 [658]	1371 [647]	1339 [632]	1296 [612]	1242 [586]	1176 [555]
4.0 [14.07]	Med.	Med.	10 x 9 Blower 3/4 HP [559 W] 3 Speed (PSC Motor)	Low	RPM	859	905	951	981	1011	1034	1057
					Watts	557	530	506	483	461	437	409
				Med.	CFM [l/s]	1793 [846]	1731 [817]	1665 [786]	1594 [752]	1519 [717]	1440 [680]	1356 [640]
					RPM	1053	1067	1080	1091	1101	1110	1119
5.0 [17.59]	High	High	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	High	Watts	667	637	606	574	543	512	483
					CFM [l/s]	1889 [892]	1826 [852]	1753 [827]	1672 [789]	1586 [749]	1499 [707]	1413 [667]
				Heat Low (Tap 1)	RPM	1110	1117	1124	1129	1133	1139	1144
					Watts	736	715	683	646	608	574	551
5.0 [17.59]	High	High (Tap 4)	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Heat Low (Tap 1)	CFM [l/s]	1319 [622]	1289 [608]	1242 [586]	1201 [567]	1148 [542]	1111 [524]	1047 [494]
					RPM	728	760	790	832	859	894	939
				Heat High (Tap 2)	Watts	222	234	241	256	263	276	287
					CFM [l/s]	1423 [672]	1390 [656]	1357 [640]	1311 [619]	1277 [603]	1233 [582]	1192 [563]
5.0 [17.59]	High	High (Tap 2)	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Heat High (Tap 2)	RPM	776	796	830	861	895	927	958
					Watts	272	278	292	300	315	326	337
				Cool Low (Tap 3)	CFM [l/s]	1872 [883]	1847 [872]	1808 [853]	1772 [836]	1743 [823]	1703 [804]	1670 [788]
					RPM	956	973	1010	1023	1057	1085	1110
5.0 [17.59]	High	High (Tap 2)	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Cool Low (Tap 3)	Watts	562	572	584	598	613	622	636
					CFM [l/s]	2046 [966]	2010 [949]	1980 [934]	1942 [917]	1904 [899]	1867 [881]	1822 [860]
				Cool High (Tap 4)	RPM	1035	1046	1079	1086	1114	1141	1171
					Watts	721	731	743	754	770	777	770

NOTE: 5 ton 1st & 2nd stage cooling speeds must be changed to low to achieve ARI performance.

[] Designates Metric Conversions



AIRFLOW PERFORMANCE—RSPL- SERIES

INDOOR AIRFLOW PERFORMANCE—208 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	External Static Pressure—Inches W.C. [kPa] Side Discharge—Wet Coil									
	Cool	Heat			0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]		
2.0 [7.03]	High (Tap 3)	High (Tap 3)	9 x 7 Blower 1/3 HP [249 W] 3 Speed (X13 Motor)	Low (Tap 1)	CFM [f/s]	821 [387]	799 [377]	775 [366]	742 [350]	706 [333]	681 [321]	641 [303]	611 [288]	
					RPM	878	903	953	996	1032	1075	1119	1176	
					Watts	131	134	142	145	147	154	156	161	
				Med. (Tap 2)	CFM [f/s]	843 [398]	820 [387]	786 [371]	760 [359]	726 [343]	699 [330]	662 [312]	608 [287]	
					RPM	896	924	961	1015	1045	1092	1125	1172	
					Watts	141	144	147	155	157	163	165	164	
2.5 [8.79]	High (Tap 3)	High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	High (Tap 3)	CFM [f/s]	896 [423]	884 [417]	847 [400]	825 [389]	789 [372]	752 [355]	720 [340]	642 [303]	
					RPM	935	966	1008	1047	1084	1118	1154	1176	
					Watts	165	171	175	182	184	186	189	174	
				Low (Tap 1)	CFM [f/s]	1030 [486]	1010 [477]	967 [456]	922 [435]	868 [410]	825 [389]	763 [360]	709 [335]	
					RPM	794	829	868	912	956	1002	1040	1093	
					Watts	155	164	169	178	183	192	195	203	
3.0 [10.55]	High (Tap 3)	High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	Med. (Tap 2)	CFM [f/s]	1153 [544]	1126 [531]	1087 [513]	1042 [492]	1002 [473]	966 [456]	903 [426]	856 [404]	
					RPM	866	887	930	966	1010	1038	1082	1121	
					Watts	207	210	220	226	234	241	246	251	
				High (Tap 3)	CFM [f/s]	1242 [586]	1213 [572]	1173 [554]	1132 [534]	1086 [513]	1044 [493]	1003 [473]	952 [449]	
					RPM	912	934	972	1012	1055	1081	1109	1146	
					Watts	249	252	262	271	275	282	283	288	
3.5 [12.31]	High (Tap 3)	High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	Low (Tap 1)	CFM [f/s]	1153 [544]	1126 [531]	1087 [513]	1042 [492]	1002 [473]	966 [456]	903 [426]	856 [404]	
					RPM	866	887	930	966	1010	1038	1082	1121	
					Watts	207	210	220	226	234	241	246	251	
				Med. (Tap 2)	CFM [f/s]	1242 [586]	1213 [572]	1173 [554]	1132 [534]	1086 [513]	1044 [493]	1003 [473]	952 [449]	
					RPM	912	934	972	1012	1055	1081	1109	1146	
					Watts	249	252	262	271	275	282	283	288	
3.5 [12.31]	High (Tap 3)	High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	High (Tap 3)	CFM [f/s]	1338 [631]	1309 [618]	1278 [603]	1234 [582]	1182 [558]	1135 [536]	1087 [513]	1007 [475]	
					RPM	963	983	1016	1049	1096	1121	1142	1159	
					Watts	304	307	316	321	328	332	330	315	
				Low (Tap 1)	CFM [f/s]	1228 [580]	1187 [560]	1140 [538]	1105 [522]	1062 [501]	1008 [476]	959 [453]	911 [430]	
					RPM	761	808	841	884	920	960	999	1038	
					Watts	150	170	180	183	185	190	195	215	
3.5 [12.31]	High (Tap 3)	High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	Med. (Tap 2)	CFM [f/s]	1454 [686]	1433 [676]	1392 [657]	1354 [639]	1322 [624]	1283 [606]	1238 [584]	1192 [563]	
					RPM	923	946	976	1015	1044	1085	1126	1146	
					Watts	301	309	316	327	337	348	356	363	
				High (Tap 3)	CFM [f/s]	1544 [729]	1531 [723]	1473 [695]	1440 [680]	1398 [660]	1361 [642]	1317 [622]	1263 [596]	
					RPM	958	973	1025	1046	1078	1109	1147	1163	
					Watts	343	350	364	371	382	391	401	396	

NOTES: (1) Do not operate 2 ton models below 700 CFM. (2) Do not operate 2 1/2 or 3 ton models below 875 CFM. (3) Cooling speed must be adjusted as follows to achieve ARI performance: medium speed for 2, 3, 3 1/2 and 4 ton models; low speed for 2 1/2 and 1st & 2nd stage 5 ton.

[] Designates Metric Conversions



INDOOR AIRFLOW PERFORMANCE—208 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—208 Volts Side Discharge—Wet Coil								
	Cool	Heat			External Static Pressure—Inches W.C. [kPa]								
					0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	
4.0 [14.07]	High (Tap 3)	High (Tap 3)	10 x 9 Blower 3/4 HP [559 W] 3 Speed (X13 Motor)	Low (Tap 1)	CFM [l/s]	1454 [686]	1433 [676]	1392 [657]	1354 [639]	1322 [624]	1283 [606]	1238 [584]	1192 [563]
					RPM	923	946	976	1015	1044	1085	1126	1146
					Watts	301	309	316	327	337	348	356	363
	Med. (Tap 2)	CFM [l/s]		1642 [775]	1621 [765]	1584 [748]	1542 [728]	1496 [706]	1451 [685]	1396 [659]	1299 [613]		
		RPM		1006	1022	1064	1090	1114	1151	1160	1172		
		Watts		405	412	422	435	442	449	440	414		
5.0 [17.59]	1st Stage High (Tap 2)	High (Tap 2)	12 x 9 Blower 1 HP [746 W] 4 Speed (X13 Motor)	Low (Tap 1)	CFM [l/s]	1896 [895]	1863 [879]	1776 [838]	1694 [799]	1603 [757]	1528 [721]	1424 [672]	1316 [621]
					RPM	1146	1147	1159	1171	1173	1180	1188	1195
					Watts	624	614	583	554	522	497	467	432
	2nd Stage High (Tap 4)	CFM [l/s]		1310 [618]	1288 [608]	1238 [584]	1204 [568]	1149 [542]	1104 [521]	1035 [488]	971 [458]		
		RPM		731	757	789	826	857	894	937	993		
		Watts		218	229	237	250	258	270	280	294		

NOTES: (1) Do not operate 2 ton models below 700 CFM. (2) Do not operate 2 1/2 or 3 ton models below 875 CFM. (3) Cooling speed must be adjusted as follows to achieve ARI performance: medium speed for 2, 3, 3 1/2 and 4 ton models; low speed for 2 1/2 and 1st & 2nd stage 5 ton.

[] Designates Metric Conversions

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)						
CFM [L/s]	600 [283]	800 [378]	1000 [472]	1200 [566]	1400 [661]	1600 [755]
Pressure Drop—Includes W.C. [kPa]	0	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]	.12 [.030]
					.15 [.037]	.17 [.042]



AIRFLOW PERFORMANCE—RSPL- SERIES

INDOOR AIRFLOW PERFORMANCE—230 VOLTS

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Blower Size/ Motor HP [W] & # of Speeds	Motor Speed		CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil									
						External Static Pressure—Inches W.C. [kPa]									
	0.1 [.02]	0.2 [.05]				0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]				
2.0 [14.07]	High (Tap 3) High (Tap 3)	9 x 7 Blower 1/3 HP [249 W] 3 Speed (X13 Motor)	Low (Tap 1)	CFM [l/s]	829 [391]	808 [381]	789 [372]	756 [357]	737 [348]	697 [329]	668 [315]	615 [290]	1173		
				RPM	890	915	961	1000	1046	1089	1121	1173			
				Watts	137	139	148	151	160	163	166	167			
			Med. (Tap 2)	CFM [l/s]	853 [403]	832 [393]	804 [379]	779 [368]	745 [352]	724 [342]	688 [325]	630 [297]	1185		
				RPM	901	928	984	1013	1054	1099	1137	1185			
				Watts	146	149	159	161	165	173	176	173			
2.5 [8.79]	High (Tap 3) High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	High (Tap 3)	CFM [l/s]	912 [430]	896 [423]	863 [407]	839 [396]	815 [385]	787 [371]	736 [347]	656 [310]	1181		
				RPM	940	977	1017	1062	1088	1139	1165	1181			
				Watts	171	179	183	192	194	203	199	182			
			Low (Tap 1)	CFM [l/s]	1039 [490]	1021 [482]	971 [458]	932 [440]	887 [419]	839 [396]	797 [376]	735 [347]	1093		
				RPM	798	833	878	922	955	1011	1061	1093			
				Watts	159	168	175	185	189	200	210	213			
3.0 [10.55]	High (Tap 3) High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	Med. (Tap 2)	CFM [l/s]	1169 [552]	1140 [538]	1111 [524]	1068 [504]	1030 [486]	995 [470]	949 [448]	895 [422]	1129		
				RPM	868	893	932	978	1010	1048	1086	1129			
				Watts	213	217	228	239	244	254	258	268			
			High (Tap 3)	CFM [l/s]	1256 [593]	1231 [581]	1201 [567]	1161 [548]	1115 [526]	1076 [508]	1043 [492]	999 [471]	1149		
				RPM	921	942	976	1018	1053	1093	1131	1149			
				Watts	259	263	272	284	290	299	309	307			
3.5 [12.31]	High (Tap 3) High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	Low (Tap 1)	CFM [l/s]	1169 [552]	1140 [538]	1111 [524]	1068 [504]	1030 [486]	995 [470]	949 [448]	895 [422]	1129		
				RPM	868	893	932	978	1010	1048	1086	1129			
				Watts	213	217	228	239	244	254	258	268			
			Med. (Tap 2)	CFM [l/s]	1256 [593]	1231 [581]	1201 [567]	1161 [548]	1115 [526]	1076 [508]	1043 [492]	999 [471]	1149		
				RPM	921	942	976	1018	1053	1093	1131	1149			
				Watts	259	263	272	284	290	299	309	307			
3.5 [12.31]	High (Tap 3) High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	High (Tap 3)	CFM [l/s]	1357 [640]	1330 [628]	1292 [610]	1262 [596]	1225 [578]	1178 [556]	1110 [524]	1033 [488]	1169		
				RPM	974	1003	1036	1071	1103	1134	1153	1169			
				Watts	318	323	333	343	347	356	345	328			
			Low (Tap 1)	CFM [l/s]	1241 [586]	1203 [568]	1155 [545]	1119 [528]	1082 [511]	1032 [487]	994 [469]	950 [448]	1044		
				RPM	771	815	848	886	932	965	1004	1044			
				Watts	155	162	170	182	193	200	210	220			
3.5 [12.31]	High (Tap 3) High (Tap 3)	10 x 9 Blower 1/2 HP [373 W] 3 Speed (X13 Motor)	Med. (Tap 2)	CFM [l/s]	1459 [689]	1438 [679]	1409 [665]	1371 [647]	1337 [631]	1296 [612]	1258 [594]	1223 [577]	1158		
				RPM	931	958	993	1031	1058	1097	1133	1158			
				Watts	308	319	331	339	349	362	373	381			
			High (Tap 3)	CFM [l/s]	1562 [737]	1538 [726]	1500 [708]	1456 [687]	1434 [677]	1383 [653]	1339 [632]	1270 [599]	1169		
				RPM	960	991	1017	1055	1089	1121	1154	1169			
				Watts	353	364	375	388	398	408	418	405			

NOTES: (1) Do not operate 2 ton models below 700 CFM. (2) Do not operate 2 1/2 or 3 ton models below 875 CFM. (3) Cooling speed must be adjusted as follows to achieve ARI performance: medium speed for 2, 3, 3 1/2 and 4 ton models; low speed for 2 1/2 and 1st & 2nd stage 5 ton.



INDOOR AIRFLOW PERFORMANCE—230 VOLTS (continued)

Nominal Cooling Capacity Tons [kW]	Motor Speed from Factory		Blower Size/ Motor HP [W] & # of Speeds	Motor Speed	CFM [L/s] Air Delivery/RPM/Watts—230 Volts Side Discharge—Wet Coil								
	Cool	Heat			External Static Pressure—Inches W.C. [kPa]								
					0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]	0.8 [.20]	
4.0 [14.07]	High (Tap 3)	High (Tap 3)	10 x 9 3/4 HP [559 W] 3 Speed (X13 Motor)	Low (Tap 1)	CFM [L/s]	1459 [689]	1438 [679]	1409 [665]	1371 [647]	1337 [631]	1296 [612]	1258 [594]	1223 [577]
					RPM	931	958	993	1031	1058	1097	1133	1158
					Watts	308	319	331	339	349	362	373	381
				Med. (Tap 2)	CFM [L/s]	1662 [784]	1648 [778]	1607 [758]	1579 [745]	1538 [726]	1477 [697]	1392 [657]	1305 [616]
					RPM	1016	1037	1072	1098	1129	1156	1169	1179
					Watts	421	429	443	453	465	465	446	420
5.0 [17.59]	1st Stage High (Tap 2) 2nd Stage High (Tap 4)	High (Tap 2)	12 x 9 1 HP [746 W] 4 Speed (X13 Motor)	Heat / 1st Stage Cool Low (Tap 1)	CFM [L/s]	1319 [622]	1289 [608]	1242 [586]	1201 [567]	1148 [542]	1111 [524]	1047 [494]	985 [465]
					RPM	728	760	790	832	859	894	939	992
					Watts	222	234	241	256	263	276	287	304
				Heat / 1st Stage Cool High (Tap 2)	CFM [L/s]	1423 [672]	1390 [656]	1357 [640]	1311 [619]	1277 [603]	1233 [582]	1192 [563]	1137 [537]
					RPM	776	796	830	861	895	927	958	999
					Watts	272	278	292	300	315	326	337	352
5.0 [17.59]	2nd Stage High (Tap 4)	High (Tap 2)	12 x 9 1 HP [746 W] 4 Speed (X13 Motor)	2nd Stage Cool Low (Tap 3)	CFM [L/s]	1872 [883]	1847 [872]	1808 [853]	1772 [836]	1743 [823]	1703 [804]	1670 [788]	1639 [774]
					RPM	956	973	1010	1023	1057	1085	1110	1146
					Watts	562	572	584	598	613	622	636	646
				2nd Stage Cool High (Tap 4)	CFM [L/s]	2046 [966]	2010 [949]	1980 [934]	1942 [917]	1904 [899]	1867 [881]	1822 [860]	1758 [830]
					RPM	1035	1046	1079	1086	1114	1141	1171	1163
					Watts	721	731	743	754	770	777	770	751

NOTES: (1) Do not operate 2 ton models below 700 CFM. (2) Do not operate 2 1/2 or 3 ton models below 875 CFM. (3) Cooling speed must be adjusted as follows to achieve ARI performance: medium speed for 2, 3, 3 1/2 and 4 ton models; low speed for 2 1/2 and 1st & 2nd stage 5 ton.

[] Designates Metric Conversions

DOWN DISCHARGE PRESSURE DROP (ADD TO EXTERNAL STATIC PRESSURE)					
CFM [L/s]	600 [283]	800 [378]	1000 [472]	1200 [566]	1400 [661]
Pressure Drop—Includes W.C. [kPa]	0	.02 [.005]	.05 [.012]	.07 [.017]	.1 [.025]
				.12 [.030]	.15 [.037]
					.17 [.042]

ELECTRICAL DATA – RSNL- SERIES											
		-B024JK	-B030JK	-B036CK	-B036JK	-B042CK	-B042JK	-B048CK	-B048JK	-C060CK	-C060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	197-253	197-253
	Minimum Circuit Ampacity	19/19	22/22	17/17	25/25	22/22	27/27	24/24	34/34	32/32	42/42
	Minimum Overcurrent Protection Device Size	20/20	25/25	20/20	25/25	25/25	30/30	25/25	35/35	35/35	45/45
	Maximum Overcurrent Protection Device Size	30/30	35/35	25/25	40/40	30/30	40/40	35/35	50/50	45/45	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3	1	3	1	3	1
	HP	2 1/6	2 2/3	3 1/3	3 1/3	3 1/2	3 1/2	4	4	5	5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	12.8/12.8	14.1/14.1	10.4/10.4	16.7/16.7	13.5/13.5	17.9/17.9	13.7/13.7	21.8/21.8	17.6/17.6	25.6/25.6
	Amps (LRA)	58.3/58.3	73/73	88/88	79/79	88/88	112/112	83.1/83.1	117/117	135/135	118/118
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1
	HP	1/5	1/5	1/5	1/5	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.3	1.3	1.3	1.3	2	2	2	2	2	2
	Amps (LRA)	2.3	2.3	2.3	2.3	3.9	3.9	3.9	3.9	3.9	3.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1
	HP	1/4	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1
	Amps (FLA)	1.3	2.4	2.4	2.4	2.4	2.4	4.4	4.4	7.6	7.6
	Amps (LRA)	2.3	5.1	5.1	5.1	5.1	5.1	9.5	9.5	0	0

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

ELECTRICAL DATA – RSPL SERIES

		-B024JK	-B030JK	-B036CK	-B036JK	-B042CK	-B042JK	-B048CK	-B048JK	-B060CK	-B060JK
Unit Information	Unit Operating Voltage Range	187-253	187-253	187-253	187-253	187-253	187-253	187-253	187-253	197-253	197-253
	Minimum Circuit Ampacity	21/21	24/24	19/19	27/27	24/24	29/29	26/26	36/36	32/32	42/42
	Minimum Overcurrent Protection Device Size	25/25	25/25	20/20	30/30	25/25	30/30	30/30	40/40	35/35	45/45
	Maximum Overcurrent Protection Device Size	30/30	35/35	25/25	40/40	35/35	45/45	35/35	50/50	45/45	60/60
Compressor Motor	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	3	1	3	1	3	1	3	1
	HP	2 1/6	2 2/3	3 1/3	3 1/3	3 1/2	3 1/2	4	4	5	5
	RPM	3450	3450	3450	3450	3450	3450	3450	3450	3450	3450
	Amps (RLA)	12.8/12.8	14.1/14.1	10.4/10.4	16.7/16.7	13.5/13.5	17.9/17.9	13.7/13.7	21.8/21.8	17.6/17.6	25.6/25.6
	Amps (LRA)	58.3/58.3	73/73	88/88	79/79	88/88	112/112	83.1/83.1	117/117	135/135	118/118
Condenser Motor	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1
	HP	1/5	1/5	1/5	1/5	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA)	1.3	1.3	1.3	1.3	2	2	2	2	2	2
	Amps (LRA)	2.3	2.3	2.3	2.3	3.9	3.9	3.9	3.9	3.9	3.9
Evaporator Fan	No.	1	1	1	1	1	1	1	1	1	1
	Volts	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230	208/230
	Phase	1	1	1	1	1	1	1	1	1	1
	HP	1/3	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1
	Amps (FLA)	2.8	4.1	4.1	4.1	4.1	4.1	6	6	7.6	7.6
	Amps (LRA)	0	0	0	0	0	0	0	0	0	0

1. Horsepower Per Compressor.

2. Amp Draw Per Motor. Multiply Value By Number of Motors to Determine Total Amps.

Copper Wire Size—AWG (1% Voltage Drop)

SUPPLY WIRE LENGTH-Feet	CIRCUIT AMPACITY																							
	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	105	110	115	120	125	
300	4	3	2	2	1	1/0	1/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	250	250	250	250	300	300	300	
250	4	4	3	3	2	1	1	1/0	1/0	2/0	2/0	2/0	3/0	3/0	3/0	4/0	4/0	4/0	4/0	4/0	250	250	250	
200	6	4	4	4	3	2	2	1	1	1/0	1/0	1/0	2/0	2/0	2/0	3/0	3/0	3/0	3/0	3/0	4/0	4/0	4/0	
150	8	6	6	4	4	4	3	3	2	2	1	1	1/0	1/0	1/0	1/0	2/0	2/0	2/0	2/0	2/0	3/0	3/0	
100	10	8	8	6	6	6	4	4	4	3	3	2	2	2	1	1	1	1	1	1/0	1/0	1/0	1/0	
50	14	12	10	10	8	8	6	6	6	4	4	4	3	3	3	2	2	2	2	2	1	1	1	

Notes: 1. Wire size based on 60°C. type copper conductors below 100 ampacity.

2. Wire size based on 75°C. type copper conductors for 100 ampacity and above.

208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit										
Unit Model No. RSNL-	Heater Kit					Unit				
	RXQJ- Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt. Ampacity @ 208/240 V	Over Current Protective Device Size		
								Min./Max. @ 208 V	Min./Max. @ 240 V	Min./Max. @ 240 V
B024JK	No Heat	—	—	—	—	—	19/19	20/30	20/30	20/30
	A05J	1	1	3.6/4.8	12.28/16.38	17.3/20.0	24/27	25/30	30/30	—
B030JK	No Heat	2	1	7.2/9.6	24.57/32.76	34.6/40.0	46/52	50/50	60/60	—
	A10J	—	—	—	—	—	22/22	25/35	25/35	25/35
B036JK	No Heat	1	1	3.6/4.8	12.28/16.38	17.3/20.0	25/28	25/35	30/35	—
	A10J	2	1	7.2/9.6	24.57/32.76	34.6/40.0	47/53	50/50	60/60	—
B042JK	No Heat	—	—	—	—	—	25/25	25/40	25/40	25/40
	A10J	2	1	7.2/9.6	24.57/32.76	34.6/40.0	47/53	50/50	60/60	—
B048JK	No Heat	3	1	10.8/14.4	36.85/49.13	51.9/60.0	68/78	70/70	80/80	—
	A15J	—	—	—	—	—	27/27	30/40	30/40	30/40
C060JK	No Heat	2	1	7.2/9.6	24.57/32.76	34.6/40.0	47/53	50/50	60/60	—
	B10J	3	1	10.8/14.4	36.85/49.13	51.9/60.0	68/79	70/70	80/80	—
	No Heat	—	—	—	—	—	34/34	35/50	35/50	35/50
	B10J	2	1	7.2/9.6	24.57/32.76	34.6/40.0	49/56	50/50	60/60	—
	No Heat	3	1	10.8/14.4	36.85/49.13	51.9/60.0	71/81	80/80	90/90	—
	B15J	—	—	—	—	—	42/42	45/60	45/60	45/60
	No Heat	—	—	—	—	—	53/60	60/60	60/60	—
	B15J	3	1	10.8/14.4	36.85/49.13	51.9/60.0	75/85	80/80	90/90	—



208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION

Single Power Supply For Both Unit and Heater Kit										
Unit Model No. RSNL-	Heater Kit					Unit				
	RXQJ- Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt. Ampacity @ 208/240 V	Over Current Protective Device Size		
								Min./Max. @ 208 V	Min./Max. @ 240 V	Min./Max. @ 240 V
B036CK	No Heat	—	—	—	—	—	17/17	20/25	20/25	20/25
	A10C	1	1	7.2/9.6	24.57/32.76	20.0/23.1	28/32	30/30	35/35	—
B042CK	No Heat	2	1	10.8/14.4	36.85/49.13	30.1/34.7	41/47	45/45	50/50	—
	A15C	—	—	—	—	—	22/22	25/30	25/30	25/35
B048CK	No Heat	—	—	—	—	—	28/32	30/30	35/35	—
	A10C	2	1	7.2/9.6	24.57/32.76	20.0/23.1	41/47	45/45	50/50	—
C060CK	No Heat	—	—	—	—	—	24/24	25/35	25/35	30/35
	A15C	3	1	10.8/14.4	36.85/49.13	30.1/34.7	31/35	35/35	35/35	—
	No Heat	—	—	—	—	—	44/49	45/45	50/50	—
	A10C	2	1	7.2/9.6	24.57/32.76	20.0/23.1	32/32	35/45	35/45	35/45
	No Heat	3	1	10.8/14.4	36.85/49.13	30.1/34.7	35/39	40/45	40/45	—
	A15C	—	—	—	—	—	48/53	50/50	60/60	—


208-240 VOLT, SINGLE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Single Power Supply For Both Unit and Heater Kit														
Unit Model No. RSPL-	Heater Kit					Unit					Heater Kit			
	RXQJ- Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt. Ampacity @ 208/240 V	Over Current Protective Device Size		Min. Circuit Ampacity 208/240 V	Max. Fuse Size 208/240V	Air Conditioner		Over Current Protective Device Size Min./Max. @ 240 V
								Min./Max. @ 208 V	Min./Max. @ 240 V			Min./Max. @ 208 V	Min./Max. @ 240 V	
B024JK	No Heat	—	—	—	—	—	21/21	25/30	25/30	21/21	—	25/30	25/30	—
	A05J A10J	1 2	1 1	3.6/4.8 7.2/9.6	12.28/16.38 24.57/32.76	17.3/20.0 34.6/40.0	26/29 47/54	30/30 50/50	30/30 60/60	—	25/25 45/50	—	—	—
B030JK	No Heat	—	—	—	—	—	24/24	25/35	25/35	24/24	—	25/35	25/35	—
	A05J A10J	1 2	1 1	3.6/4.8 7.2/9.6	12.28/16.38 24.57/32.76	17.3/20.0 34.6/40.0	27/31 49/56	30/35 50/50	35/35 60/60	—	25/25 45/50	—	—	—
B036JK	No Heat	—	—	—	—	—	27/27	30/40	30/40	27/27	—	30/40	30/40	—
	A10J A15J	2 3	1 1	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	34.6/40.0 51.9/60.0	49/56 70/81	50/50 70/70	60/60 90/90	—	45/50 70/80	—	—	—
B042JK	No Heat	—	—	—	—	—	29/29	30/45	30/45	29/29	—	30/45	30/45	—
	A10J A15J	2 3	1 1	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	34.6/40.0 51.9/60.0	49/56 70/81	50/50 70/70	60/60 90/90	—	45/50 70/80	—	—	—
B048JK	No Heat	—	—	—	—	—	36/36	40/50	40/50	36/36	—	40/50	40/50	—
	B10J B15J	2 3	1 1	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	34.6/40.0 51.9/60.0	51/58 73/83	60/60 80/80	60/60 90/90	—	45/50 70/80	—	—	—
B060JK	No Heat	—	—	—	—	—	42/42	45/60	45/60	42/42	—	45/60	45/60	—
	B10J B15J	2 3	1 1	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	34.6/40.0 51.9/60.0	53/60 75/85	60/60 80/80	60/60 90/90	—	45/50 70/80	—	—	—

208-240 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION														
Single Power Supply For Both Unit and Heater Kit														
Unit Model No. RSPL-	Heater Kit					Unit					Heater Kit			
	RXQJ- Heater Kit Nominal kW	No. of Elements	No. of Sequence Steps	Rated Heater kW @ 208/240 V	Heater KBTU/Hr @ 208/240 V	Heater Amp. @ 208/240 V	Unit Min. Ckt. Ampacity @ 208/240 V	Over Current Protective Device Size		Min. Circuit Ampacity 208/240 V	Max. Fuse Size 208/240V	Air Conditioner		Over Current Protective Device Size Min./Max. @ 240 V
								Min./Max. @ 208 V	Min./Max. @ 240 V			Min./Max. @ 208 V	Min./Max. @ 240 V	
B036CK	No Heat	—	—	—	—	—	19/19	20/25	20/25	19/19	—	20/25	20/25	—
	A10C A15C	—	—	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	20.0/23.1 30.1/34.7	31/34 43/49	35/35 45/45	35/35 50/50	—	25/30 40/45	—	—	—
B042CK	No Heat	—	—	—	—	—	24/24	25/35	25/35	24/24	—	25/35	25/35	—
	A10C A15C	—	—	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	20.0/23.1 30.1/34.7	31/34 43/49	35/35 45/45	35/35 50/50	—	25/30 40/45	—	—	—
B048CK	No Heat	—	—	—	—	—	26/26	30/35	30/35	26/26	—	30/35	30/35	—
	A10C A15C	—	—	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	20.0/23.1 30.1/34.7	33/37 46/51	35/35 50/50	40/40 60/60	—	25/30 40/45	—	—	—
B060CK	No Heat	—	—	—	—	—	32/32	35/45	35/45	32/32	—	35/45	35/45	—
	A10C A15C	—	—	7.2/9.6 10.8/14.4	24.57/32.76 36.85/49.13	20.0/23.1 30.1/34.7	35/39 48/53	35/45 50/50	40/45 60/60	—	25/30 40/45	—	—	—


UNIT DIMENSIONS PACKAGE AIR CONDITIONERS

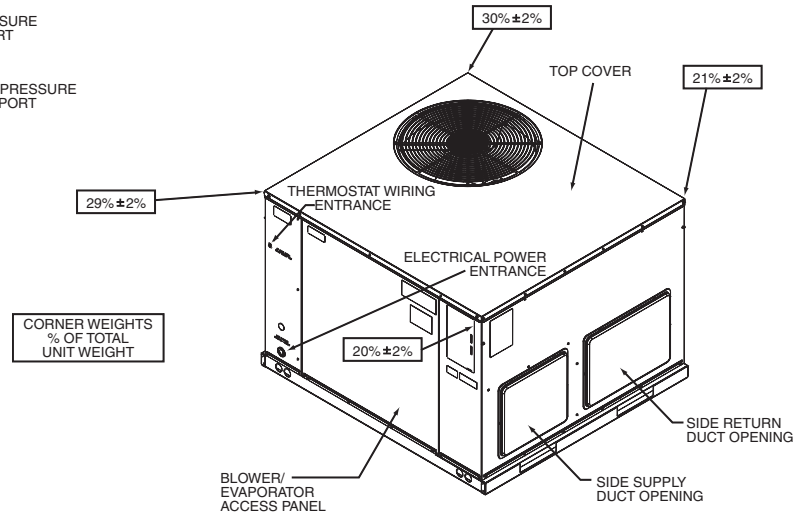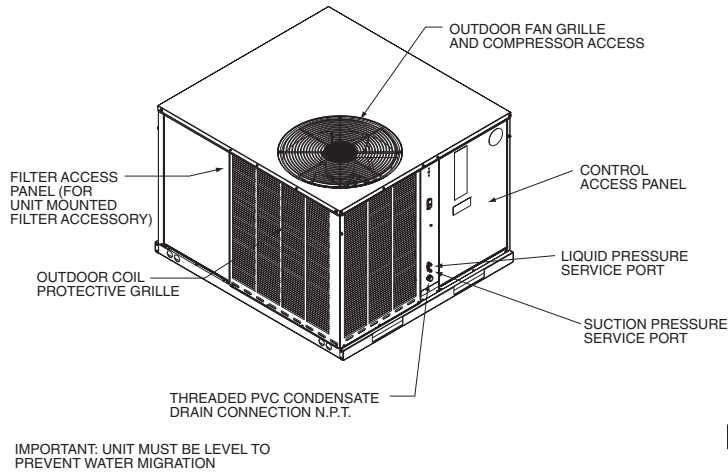

TOP VIEW

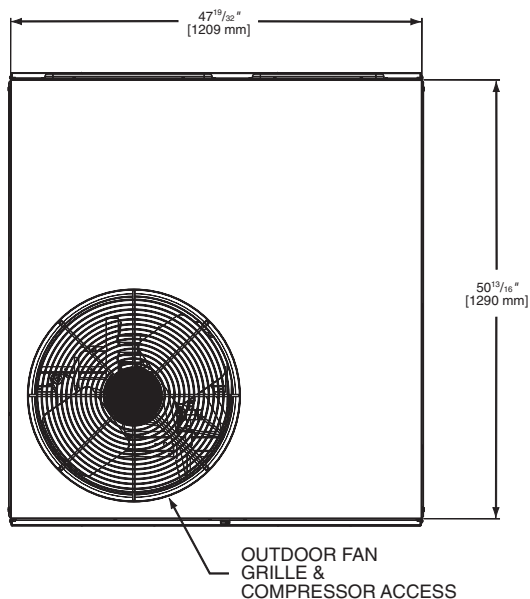


BOTTOM VIEW

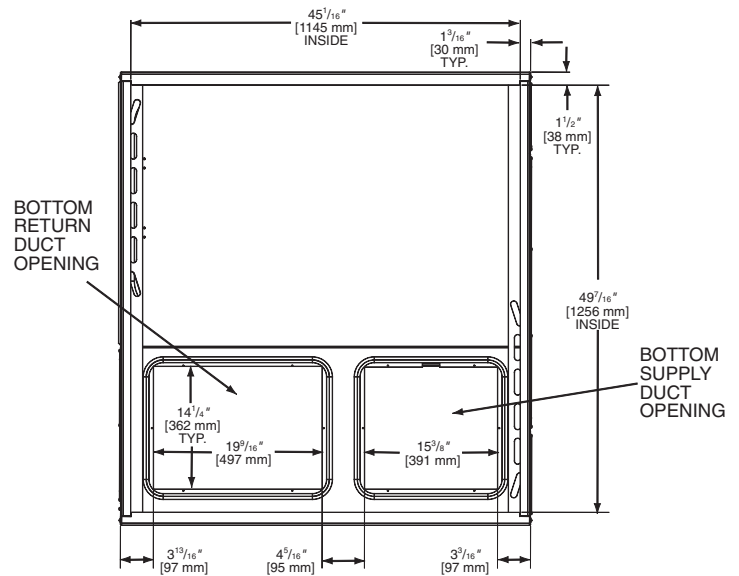





SIDE VIEW

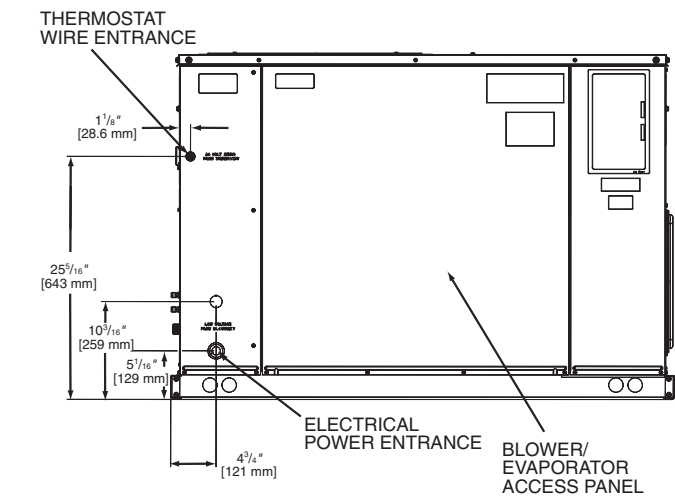


SIDE VIEW

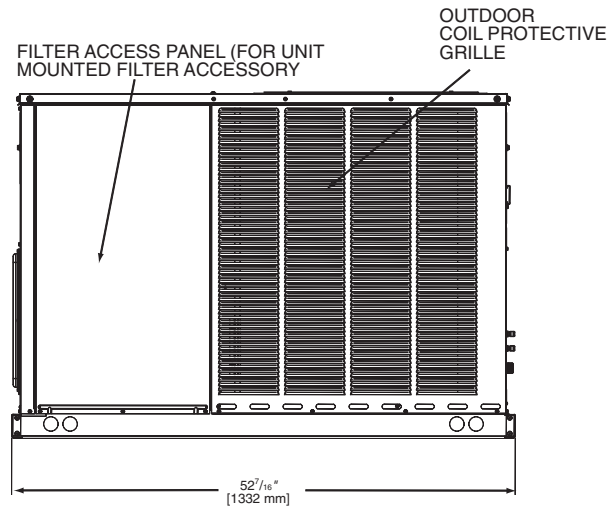

FRONT VIEW

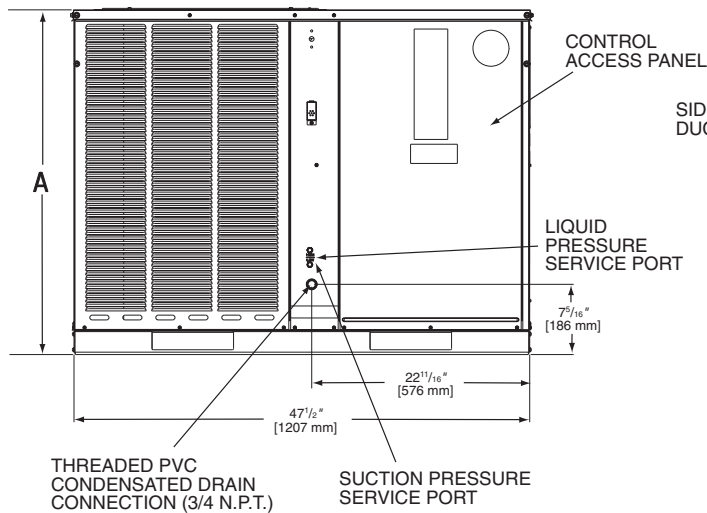



REAR VIEW

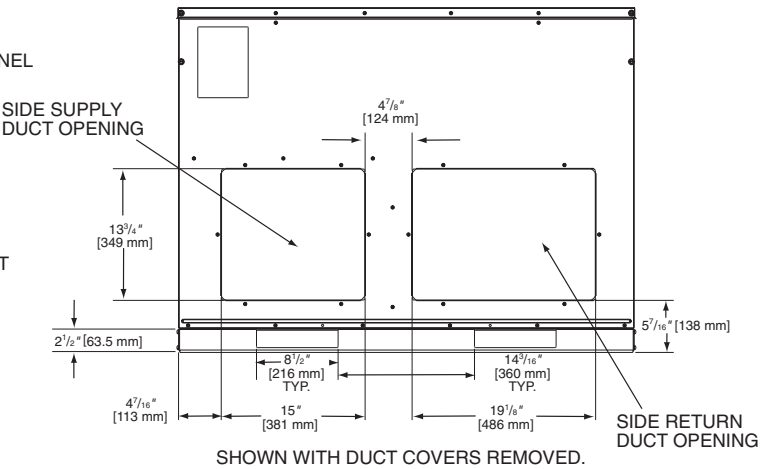

[] Designates Metric Conversions

Model #	Height "A"
B024, B030, B036	35 ¹⁵ / ₁₆
B042, B048, B060, C060	41

IMPORTANT:
Unit must be level to prevent water migration.

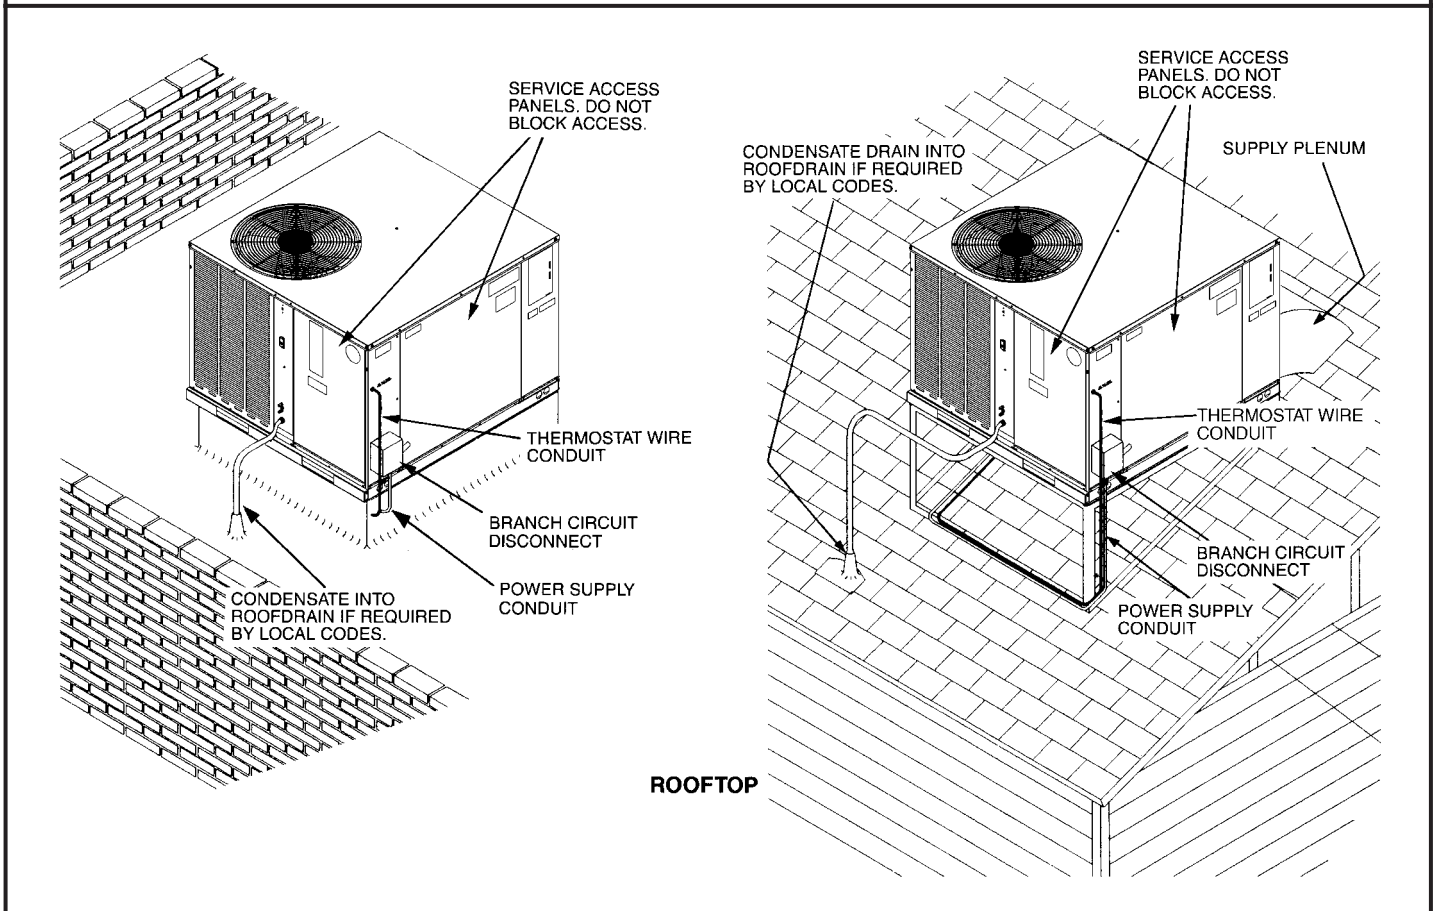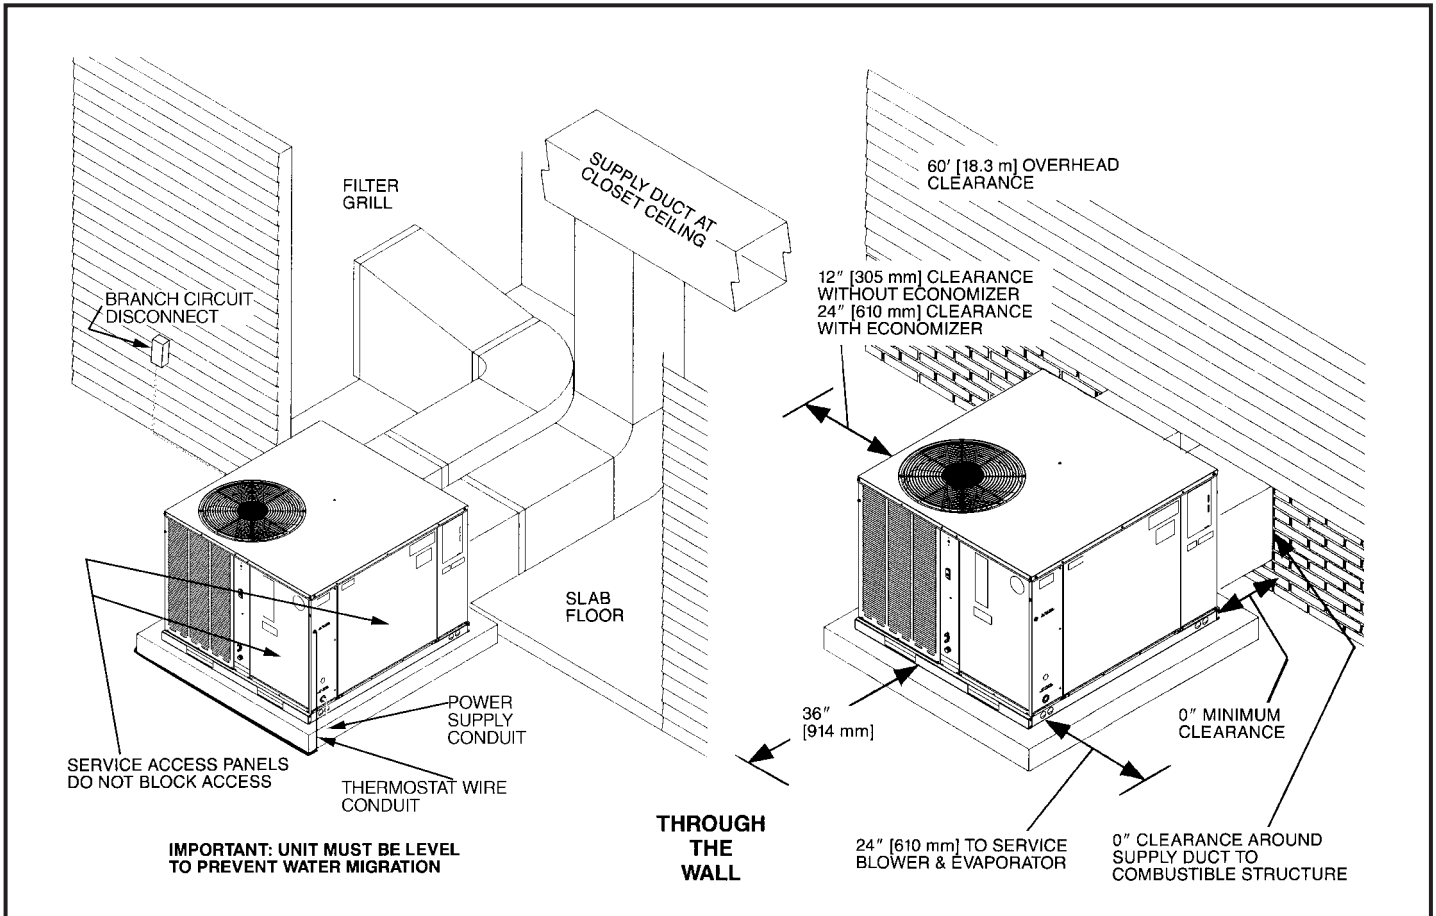


ACCESSORY EQUIPMENT

Accessory Description	Model Application	Accessory Model No.
Thermostats	RSNL-/RSPL-	See Thermostat Specification Sheet (T22-001)
Roofcurbs	RSNL-/RSPL-	RXSG-AAA08 (8" [203 mm] Height) RXSG-AAA14 (14" [356 mm] Height) RXSG-AAA24 (24" [610 mm] Height)
Supply & Return Diffusers	RSNL-/RSPL-	RXRN-D15
Economizers (Sideflow ONLY)	RSNL-/RSPL-	RXRE-CCA30 (3 Position) RXRD-CCM10 (Fully Modulating)
Economizers (Downflow ONLY)	RSNL-/RSPL-	RXRE-CAA30 (3 Position) RXRD-CAM10 (Fully Modulating)
Fresh Air Damper	RSNL-/RSPL-	RXRF-FAB1 (Motorized-35%) RXRF-FAA1 (Fixed-35%)
Rectangular to Round Transition (Downflow)	RSNL-/RSPL-	RXMC-CA02 (16" [406 mm] Ducts) RXMC-CA03 (18" [457 mm] Ducts)
Filter Kit	RSNL-/RSPL-	RXRY-01
Sideflow Rectangular to Round Transition	RSNL-/RSPL-	RXMC-A01
Low Ambient Control	RSNL-/RSPL-	RXRZ-01
High Pressure Control	RSNL-/RSPL-	RXAB-E01
Low Pressure Control	RSNL-/RSPL-	RXAC-C01

[] Designates Metric Conversions

COMMON SUPPLY/RETURN CONCENTRIC AIR DIFFUSER

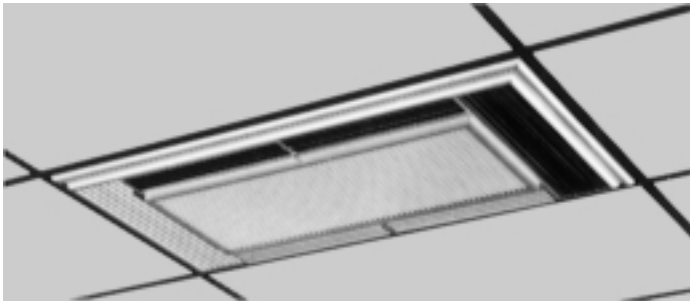


SUPPLY/RETURN DIFFUSER



Designed to convert a side by side or an over and under arrangement into a concentric distribution of air. The diffuser is flush mounted, completely insulated, assembled, and internally baffled to provide four way supply air distribution with a center return. To make the assembly complete and ready to fit into a 2' [0.61 m] x 4' [1.22 m] suspended ceiling grid, the diffuser includes adjustable supply louvers, hanging rings, anti-sweat gasket, and round flanges for use with flexible ducts.

Model No.	Diameter Inches [mm]	Shipping Wt. Lbs. [kg]	Dimension A Inches [mm]
RXRN-BD15	16 [406]	90 [40.82]	20 1/2 [521]

DIFFUSER INSTALLS FLUSH WITH CEILING

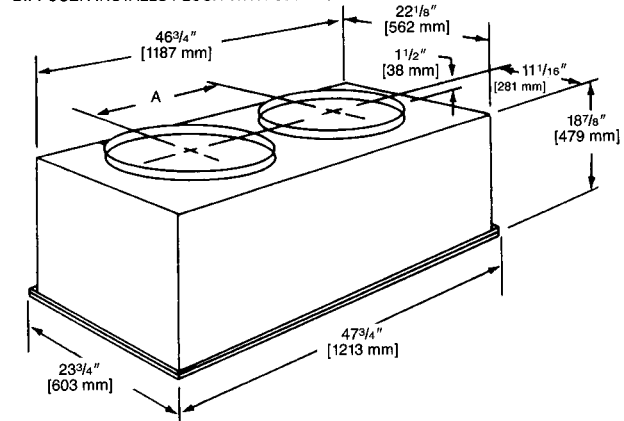

NOTE: The location of the combination supply and return diffuser should not exceed 10 feet [3.05 m] above the floor level for units @ 1000 CFM [472 L/s] or less and 12 [3.66 m] to 14 feet [4.27 m] above the floor level for units with CFM greater than 1000 [472 L/s]. If the diffuser is installed with a greater distance than recommended above, the supply air may become stratified above the required comfort area causing uncomfortable conditions.

AIRFLOW/PRESSURE DROP INFORMATION (INCHES W.C. [kPa])


Accessory	Approximate CFM [L/s]-Supply Air			
	1300 [614]	1575 [743]	1800 [850]	2200 [1038]
Plenum & Supply/Return Duct	.07 [.017]	.10 [.024]	.12 [.030]	.17 [.042]
Diffuser	.09 [.022]	.13 [.032]	.16 [.040]	.24 [.060]
Economizer	.06 [.015]	.09 [.022]	.11 [.027]	.17 [.042]

SUPPLY AIR/PERFORMANCE

Diffuser Airflow CFM [L/s]	Range of Throw Ft. [m]
800 [378]-1200 [566]	14 [4.27]-16 [4.88]
1600 [755]-2000 [944]	18 [5.49]-28 [8.53]

FILTER KIT INSTALLATION RXRY-01

For use in either vertical
or horizontal discharge.


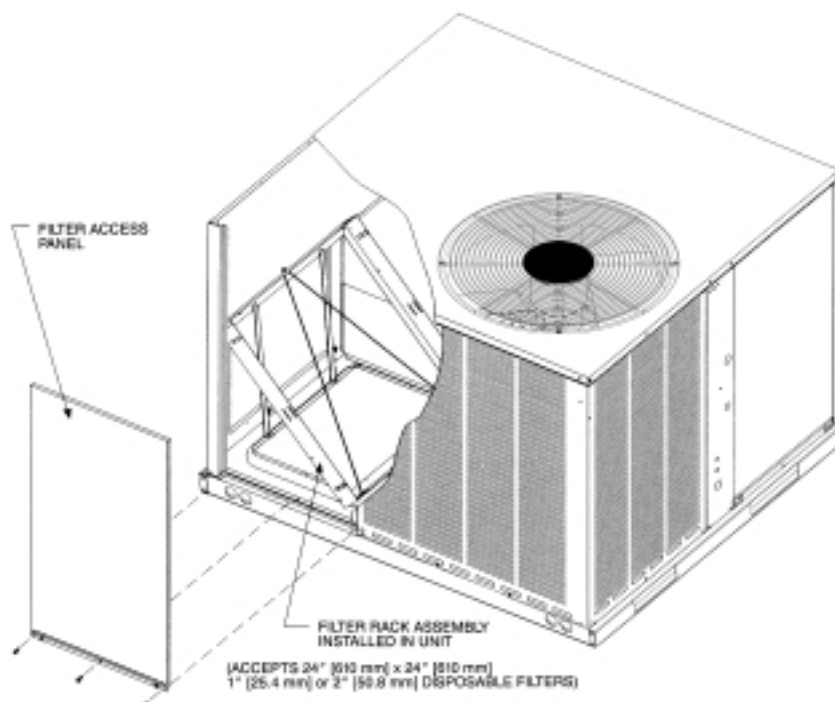


Airflow Pressure Drop, Inches W.C. [kPa]		
CFM [L/s]	1" Filter	2" Filter
500 [236]	.02 [.0050]	.03 [.0075]
600 [283]	.02 [.0050]	.03 [.0075]
700 [330]	.03 [.0075]	.04 [.0010]
800 [378]	.04 [.0010]	.05 [.0124]
900 [425]	.05 [.0124]	.06 [.0149]
1000 [472]	.07 [.0174]	.08 [.0199]
1100 [519]	.08 [.0199]	.09 [.0224]
1200 [566]	.10 [.0249]	.12 [.0299]
1300 [614]	.13 [.0324]	.15 [.0373]
1400 [661]	.16 [.0398]	.19 [.0473]
1500 [708]	.19 [.0473]	.21 [.0523]
1600 [755]	.20 [.0498]	.23 [.0572]
1700 [802]	.21 [.0523]	.24 [.0598]
1800 [850]	.22 [.0548]	.25 [.0623]
1900 [897]	.24 [.0598]	.27 [.0672]
2000 [944]	.26 [.0647]	.29 [.0722]

[] Designates Metric Conversions

DUCT ADAPTERS RECTANGULAR TO ROUND TRANSITIONS (DOWNFLOW)

RXMC-CA02

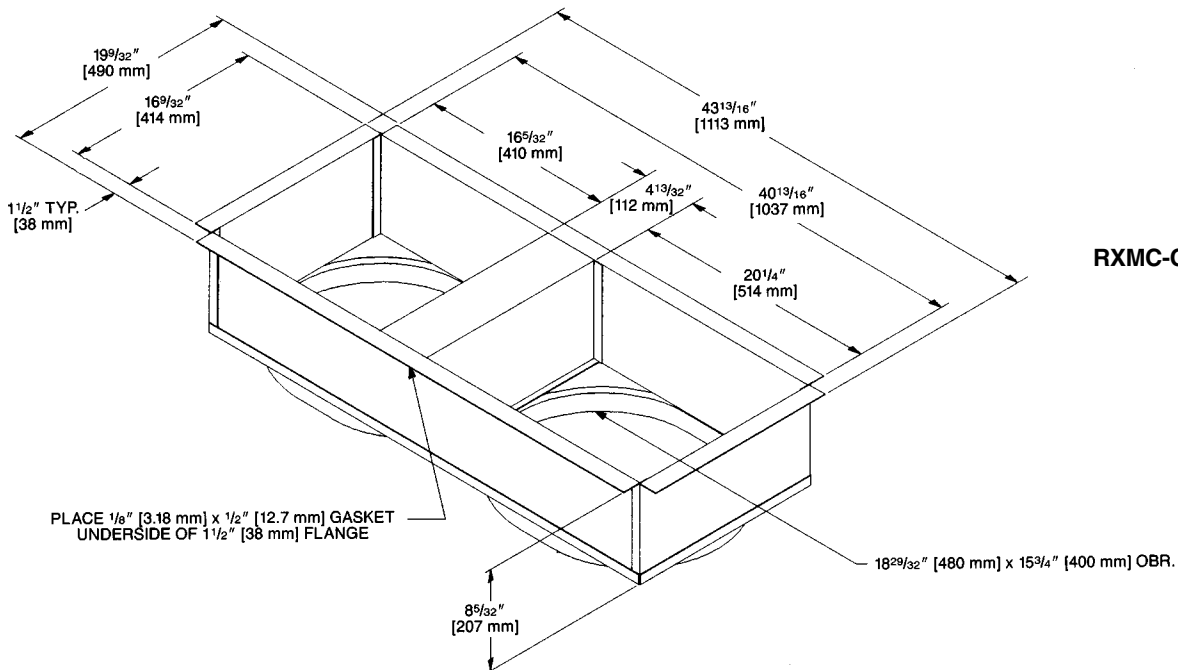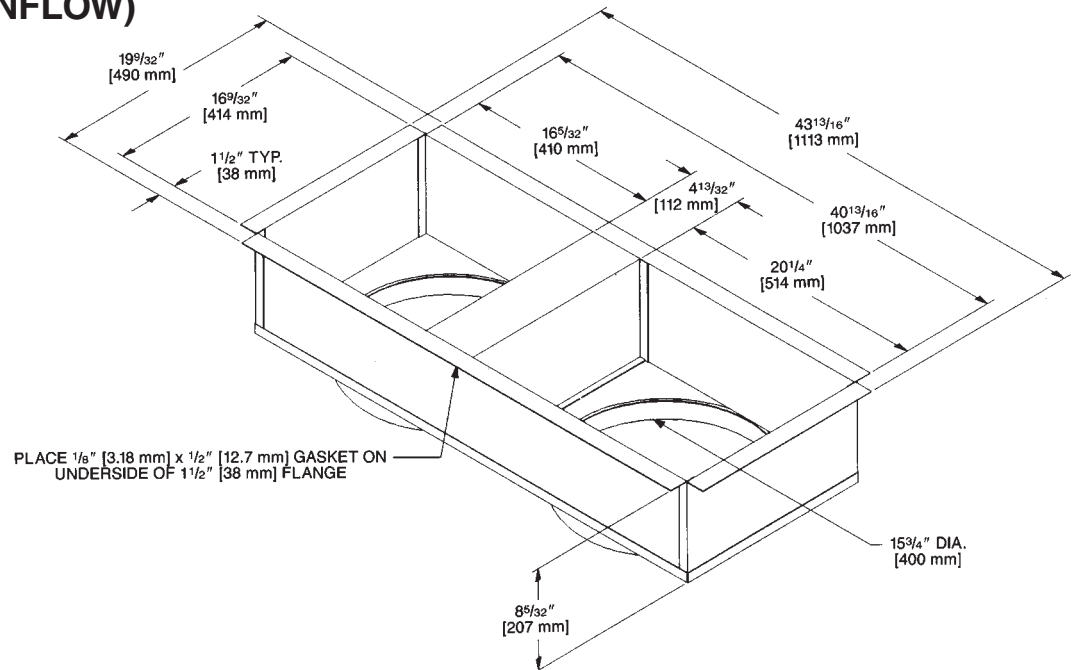

RXMC-CA03

[] Designates Metric Conversions


FRESH AIR DAMPER FOR USE ON RSNL-/RSPL- SERIES

RXRF-FAA1 (Fixed - 0-35%)

The 0-35% manual outside Air Damper is designed to replace the unit return air duct cover. No drilling or damper assembly is required. The amount of outside air (0-35%) is controlled by simply adjusting the side damper.

RXRF-FAB1 (Motorized - 0-35%)

The 0-35% motorized outside Air Damper is designed to replace the unit return air duct cover. No drilling or damper assembly is required. The control motor opens the adjustable slide damper when the unit blower motor is energized.

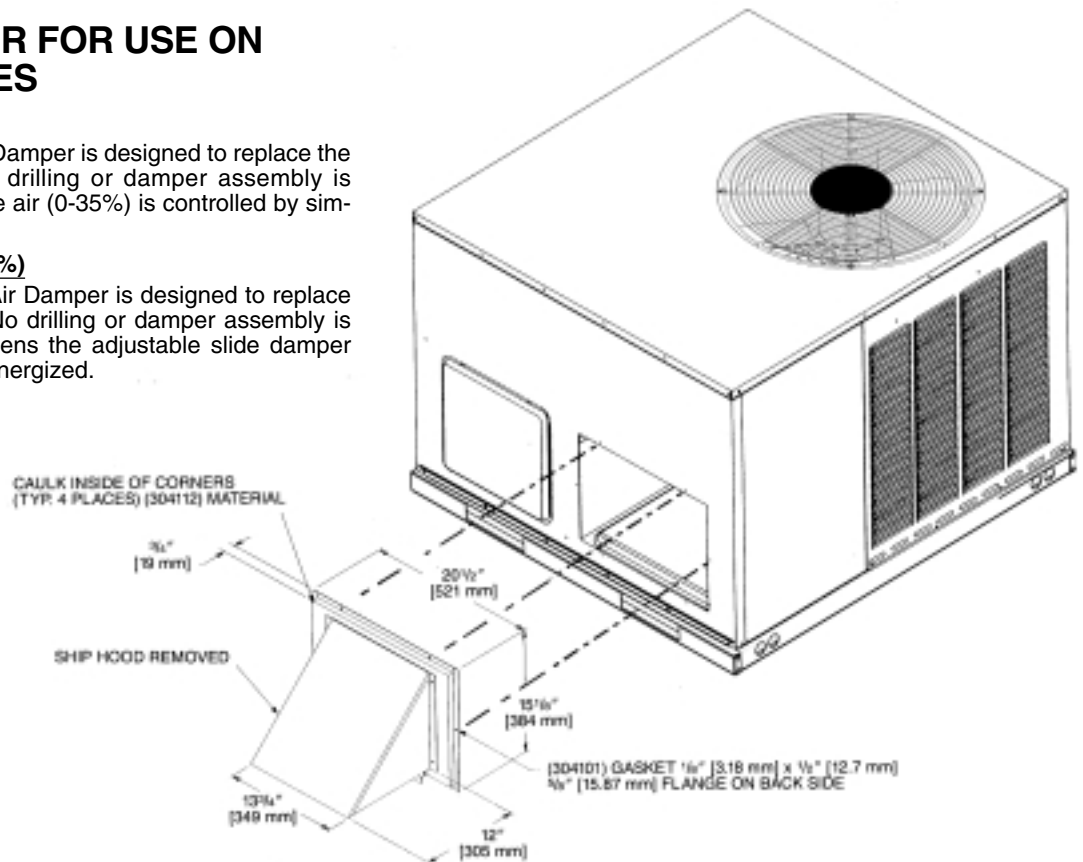

ECONOMIZERS

RXRE-CAA30 (3 Position) and RXRD-CAM10 (Fully Modulating)


RXRE-CAA30 (3 Position)

Provided with enthalpy control, and mixed air sensor. Settings include fully open, fully closed and adjustable mid point.

RXRD-CAM10 (Fully Modulating)

Provided with enthalpy control, mixed air sensor and minimum position potentiometer for proportioning (modulating) the amount of fresh air.

Note: See economizer installation instructions for correct filter access door.

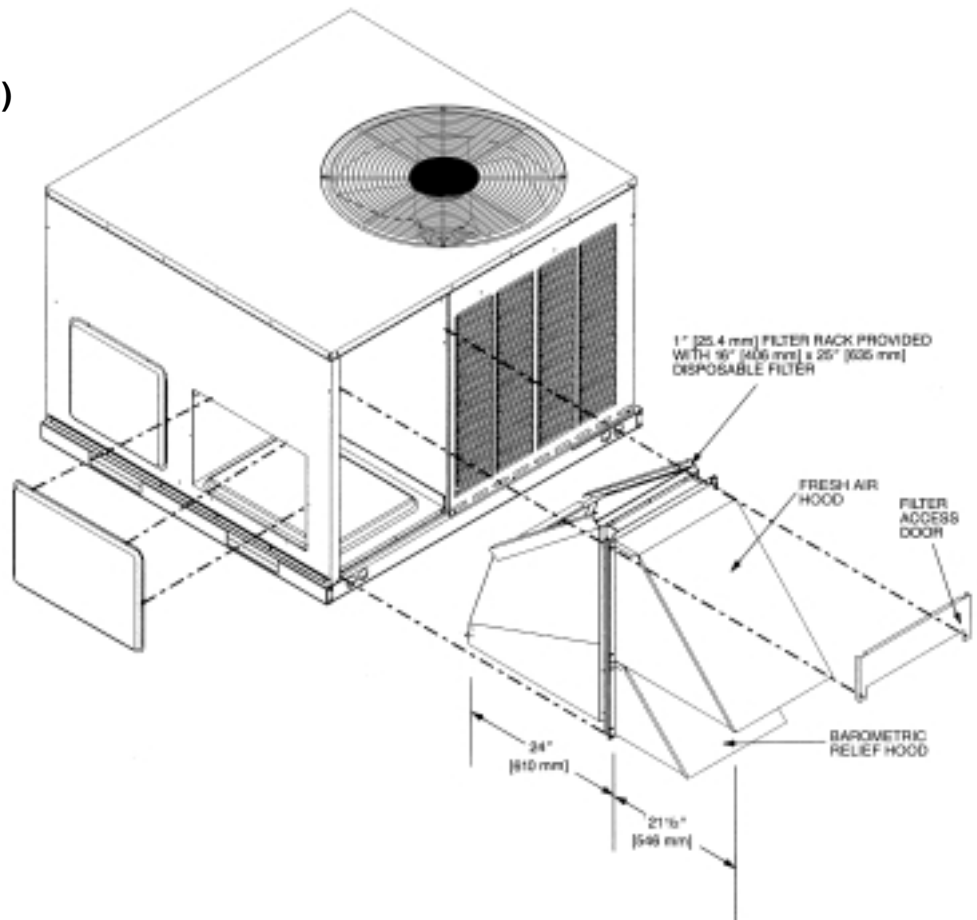

[] Designates Metric Conversions


ECONOMIZERS

RXRE-CAA30 (3 Position) and
RXRD-CCM10 (Fully Modulating) for
Horizontal Application

RXRE-CAA30 (3 Position)
Has outdoor air sensor, minimum position potentiometer, and mixed air sensor to provide three damper positions.

RXRD-CCM10 (Fully Modulating)
Provided with enthalpy control, mixed air sensor and minimum position potentiometer for proportioning (modulating) the amount of fresh air.

[] Designates Metric Conversions

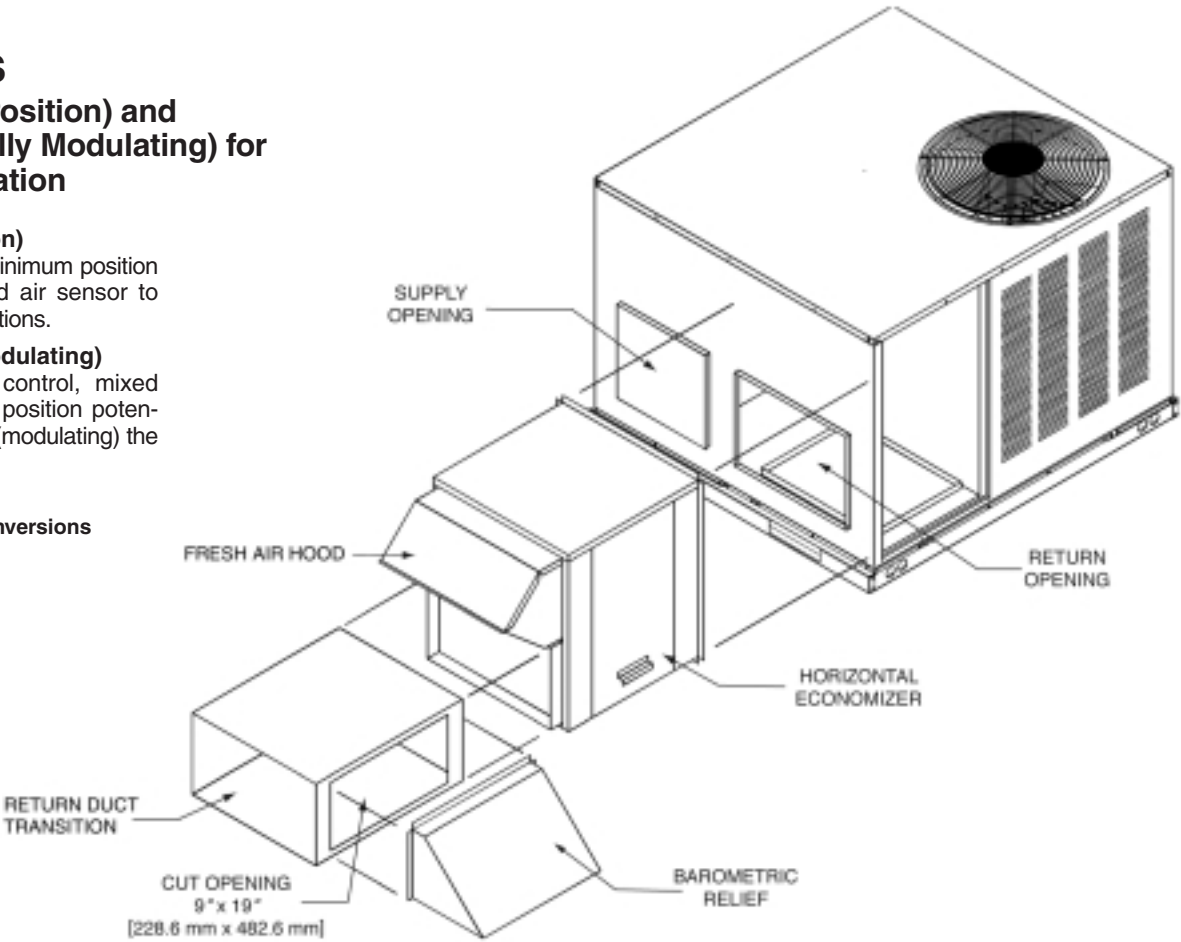

THERMOSTATS

■ Thermostats



100-Series *
Non-Programmable



200-Series *
Programmable



300-Series *
Deluxe Programmable
400-Series * Special
Applications/Programmable

500-Series *
Communicating/
Programmable

Brand	Unique Model Number Prefix	Descriptor (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
UHC	-	TST	101	GE	MS
UHC=Ruud		TST=Thermostat	100=Non-Programmable	GE=Gas/Oil/Electric	SS=Single-Stage MS=Multi-Stage
			200=Programmable	HP=Heat Pump	
			300=Deluxe Programmable	MD=Modulating Furnace	
			400=Special Applications/Programmable	DF=Dual Fuel	
			500=Communicating/Programmable	UN=Universal AC/HP/GE CM=Communicating	


* Photos are representative. Actual models may vary.

For detailed thermostat match-up information,
see specification sheet form number T22-001.

DUCT ADAPTER SIDEFLOW SQUARE TO ROUND TRANSITION RXMC-A01

Adapts the side rectangular supply and return openings to 14" [356 mm] diameter round openings. Adapters provided with same finish as unit and also provided with thermal insulation.

[] Designates Metric Conversions

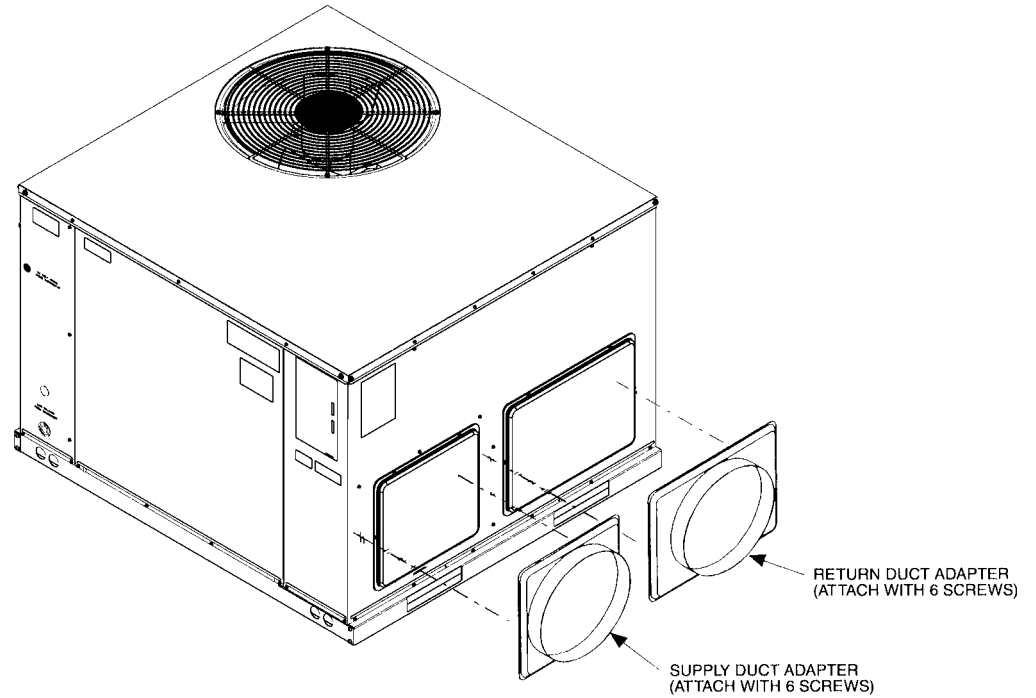


ROOFCURB (Full Perimeter)

**RXSG-AAA08, RXSG-AAA14
and RXSG-AAA24 for
RSNL-/RSPL- Series**


Hinged corners make for
fast, easy set-up.

**RXSG-AAA08
(8" [203 mm] High)**

NOT for use with
RQKA/RQLA/RQMA
Package Heat Pumps.

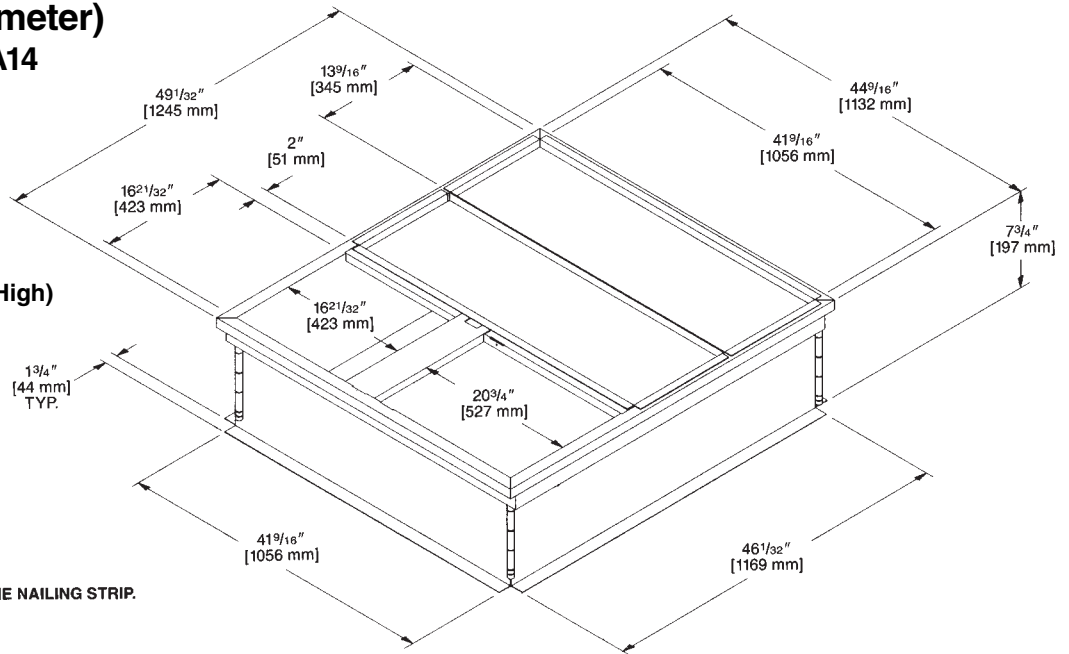

NOTE: PERIMETER OF ROOFCURB IS SUPPLIED
WITH A NOMINAL 1" [25.4 mm] x 4" [102 mm] PINE NAILING STRIP.

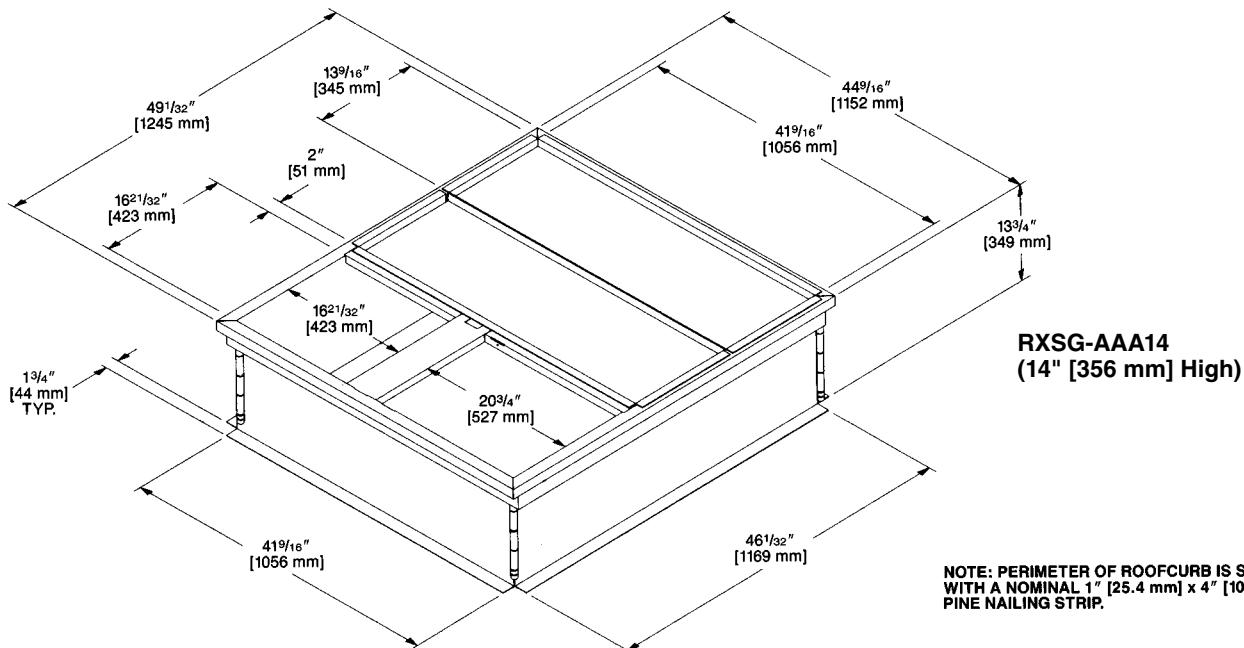


**RXSG-AAA14
(14" [356 mm] High)**

NOTE: PERIMETER OF ROOFCURB IS SUPPLIED
WITH A NOMINAL 1" [25.4 mm] x 4" [102 mm]
PINE NAILING STRIP.


[] Designates Metric Conversions

ROOFCURB (Full Perimeter) (Cont.)

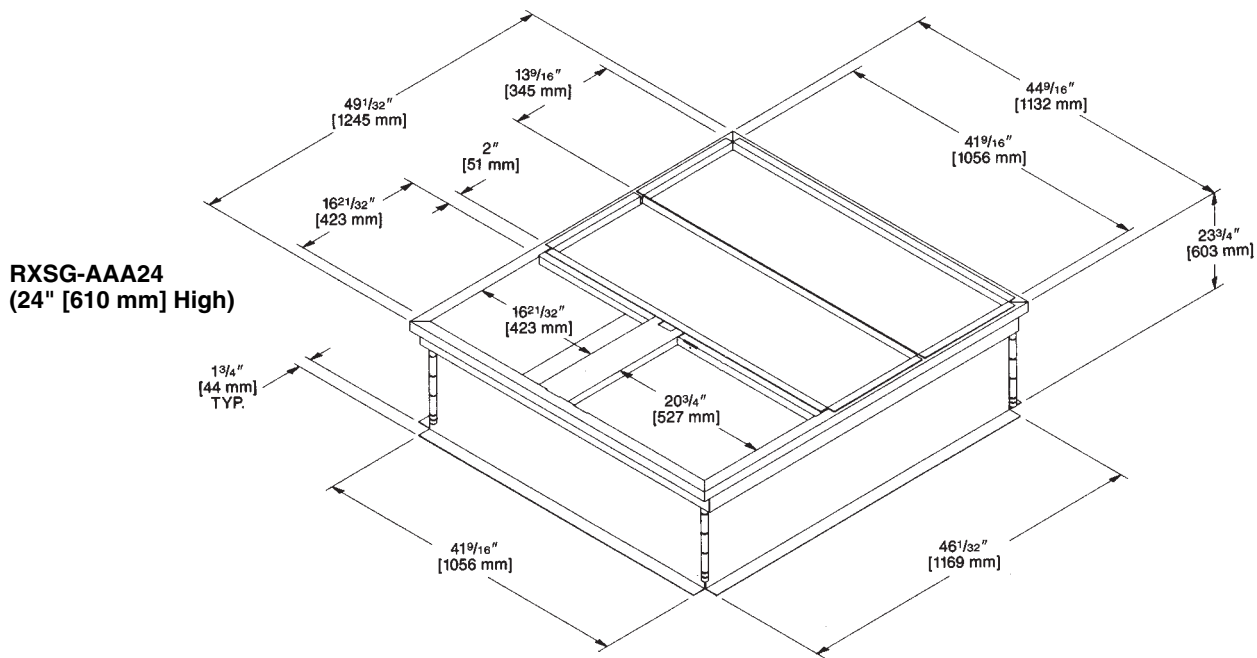


[] Designates Metric Conversions

PACKAGE AIR CONDITIONERS & GAS/ELECTRIC PACKAGE UNITS ROOFCURB INSTALLATION (Full Perimeter)

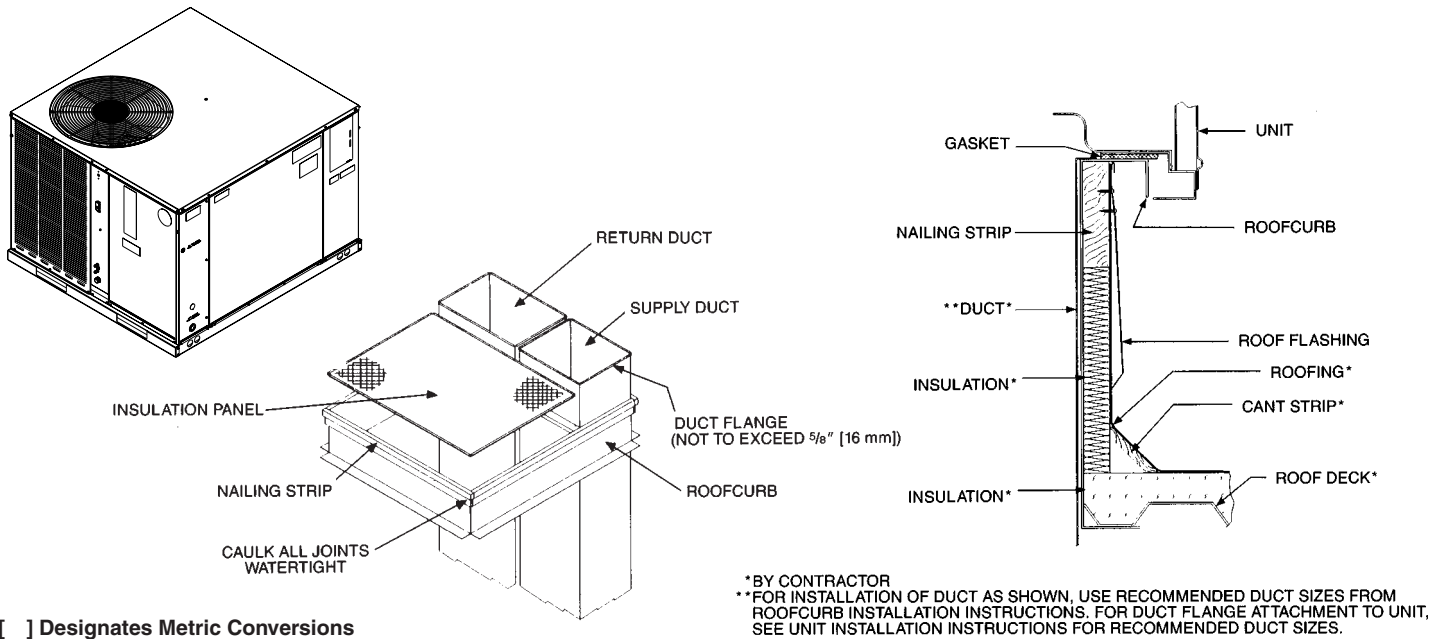

ROOFCURB ADAPTERS

Fabricated from galvanized steel to adapt the New cabinet to the old style curb. All are furnished with a New gasket.

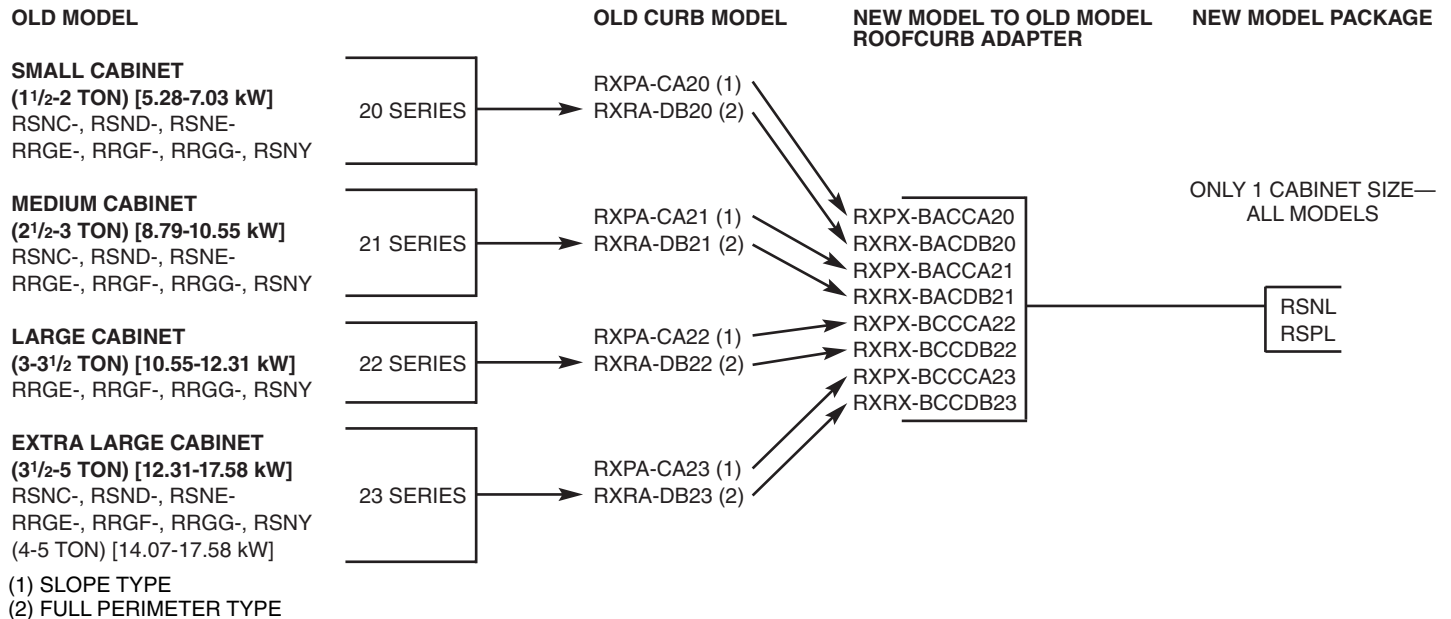


ELECTRIC HEATER KITS—RSNL-


Unit Model Application	Electric Heater Kit Models
RSNL/RSPL-B024JK	RXQJ-A05J (208-240 volt, 1-ph, 5kW)
	RXQJ-A10J (208-240 volt, 1-ph, 10kW)
RSNL/RSPL-B030JK	RXQJ-A05J (208-240 volt, 1-ph, 5kW)
	RXQJ-A10J (208-240 volt, 1-ph, 10kW)
RSNL/RSPL-B036JK	RXQJ-A10J (208-240 volt, 1-ph, 10kW)
	RXQJ-A15J (208-240 volt, 1-ph, 15kW)
RSNL/RSPL-B042JK	RXQJ-A10J (208-240 volt, 1-ph, 10kW)
	RXQJ-A15J (208-240 volt, 1-ph, 15kW)
RSNL/RSPL-B048JK, RSPL-B060JK/RJNL-C060JK	RXQJ-B10J (208-240 volt, 1-ph, 10kW)
	RXQJ-B15J (208-240 volt, 1-ph, 15kW)
RSNL/RSPL-B036CK	RXQJ-A10C (208-240 volt, 3-ph, 10kW)
	RXQJ-A15C (208-240 volt, 3-ph, 15kW)
RSNL/RSPL-B042CK	RXQJ-A10C (208-240 volt, 3-ph, 10kW)
	RXQJ-A15C (208-240 volt, 3-ph, 15kW)
RSNL/RSPL-B048CK, RSPL-B060CK/RSNL-C060JK	RXQJ-A10C (208-240 volt, 3-ph, 10kW)
	RXQJ-A15C (208-240 volt, 3-ph, 15kW)

[] Designates Metric Conversions


WARNING


ONLY ELECTRIC HEATER KITS SUPPLIED BY THIS MANUFACTURER AS DESCRIBED IN THIS PUBLICATION HAVE BEEN DESIGNED, TESTED, AND EVALUATED BY A NATIONALLY RECOGNIZED SAFETY TESTING AGENCY FOR USE WITH THIS UNIT. USE OF ANY OTHER MANUFACTURED ELECTRIC HEATERS INSTALLED WITHIN THIS UNIT MAY CAUSE HAZARDOUS CONDITIONS RESULTING IN PROPERTY DAMAGE, FIRE, BODILY INJURY OR DEATH.

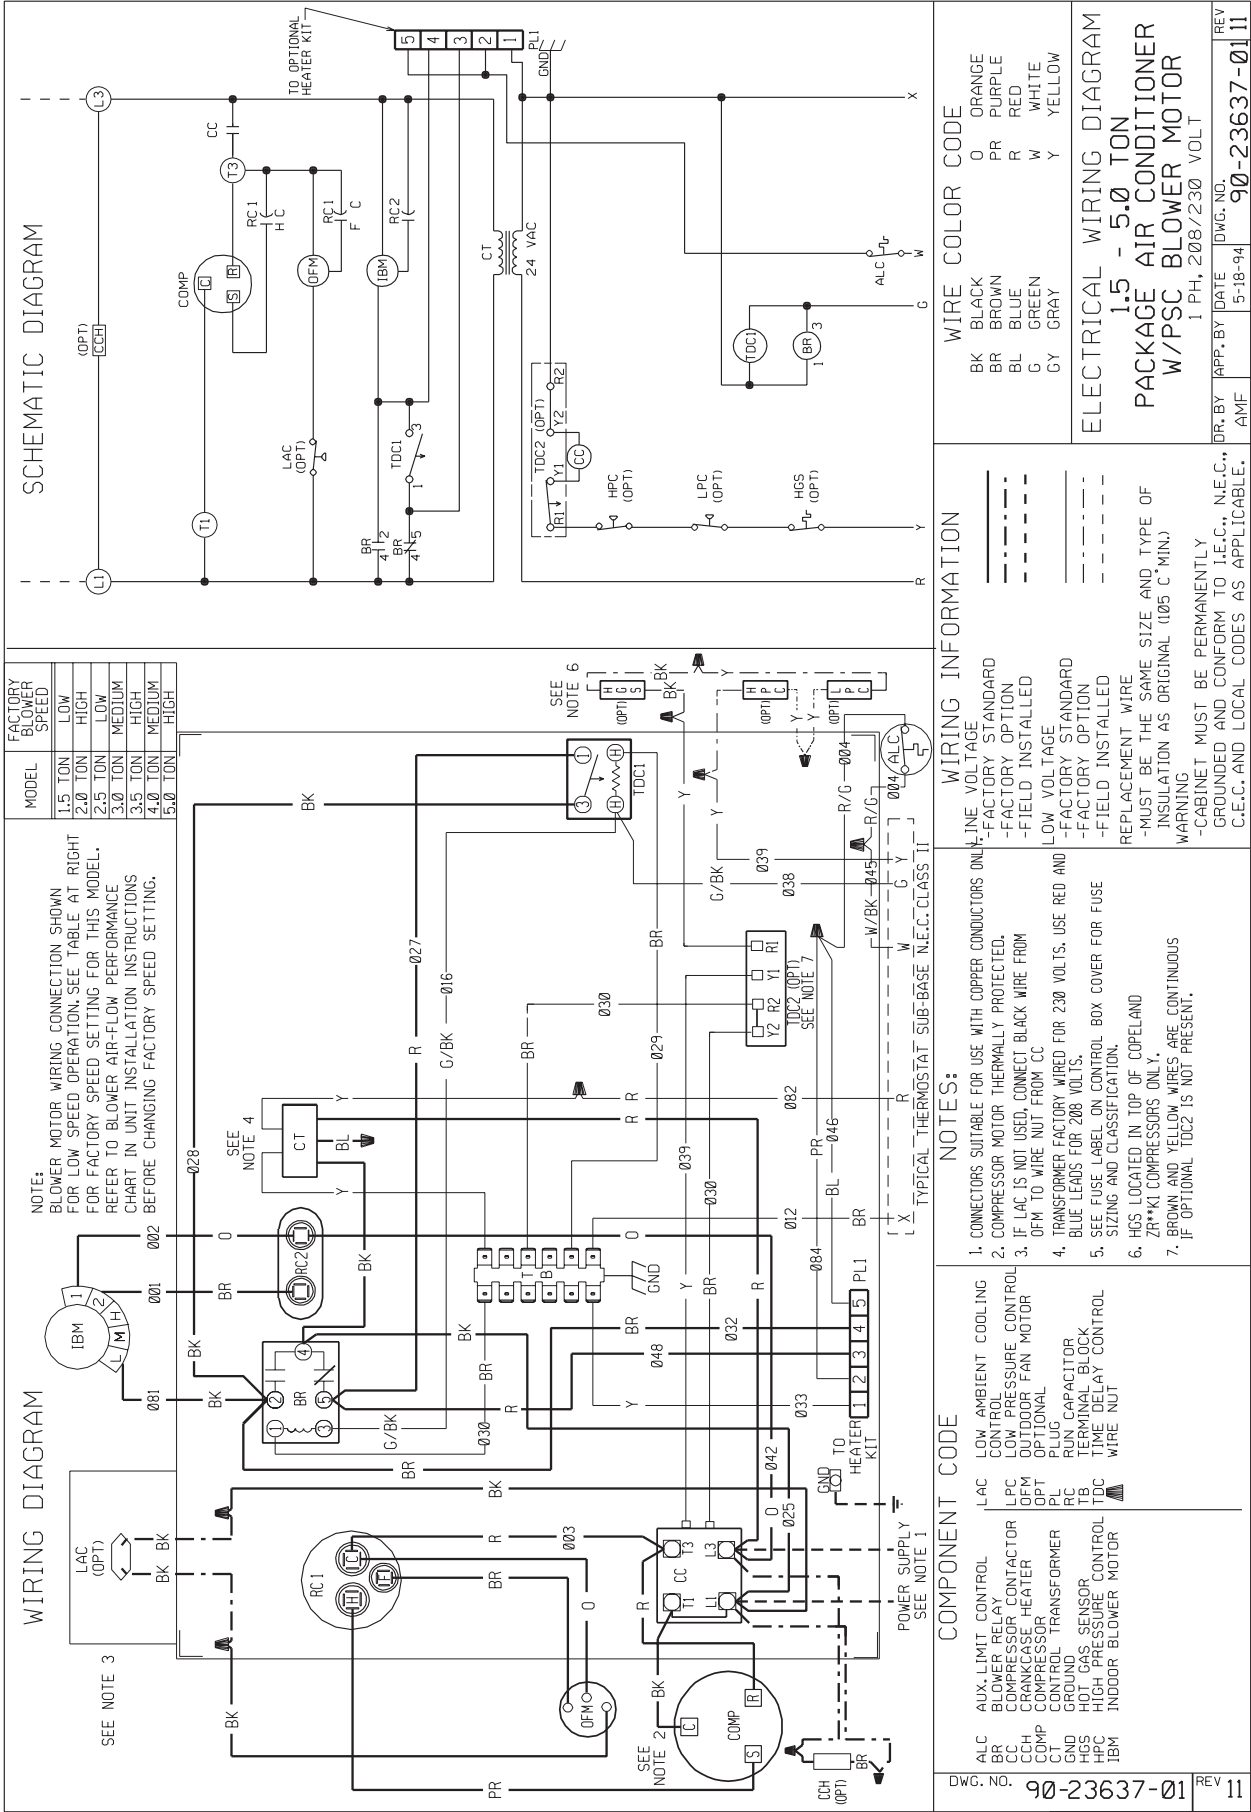

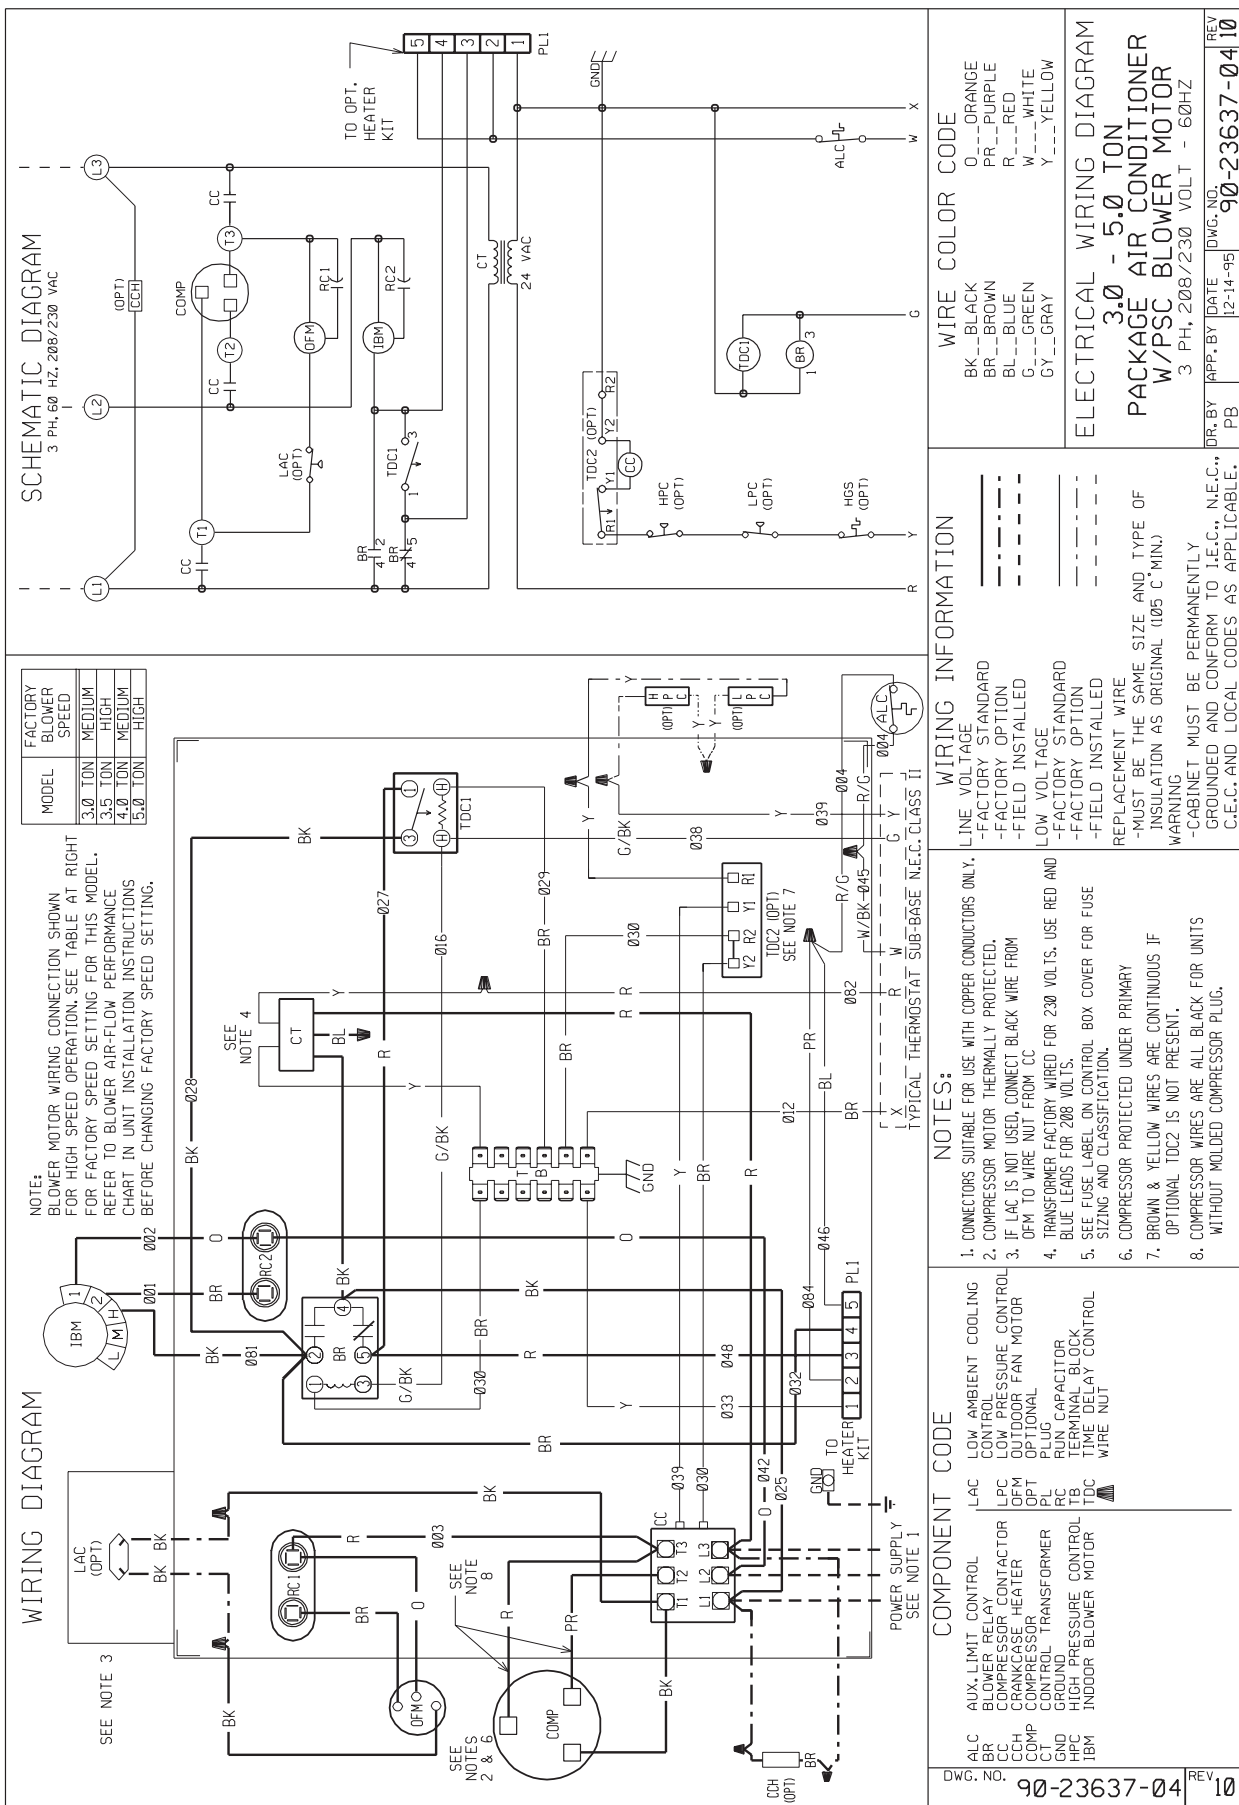




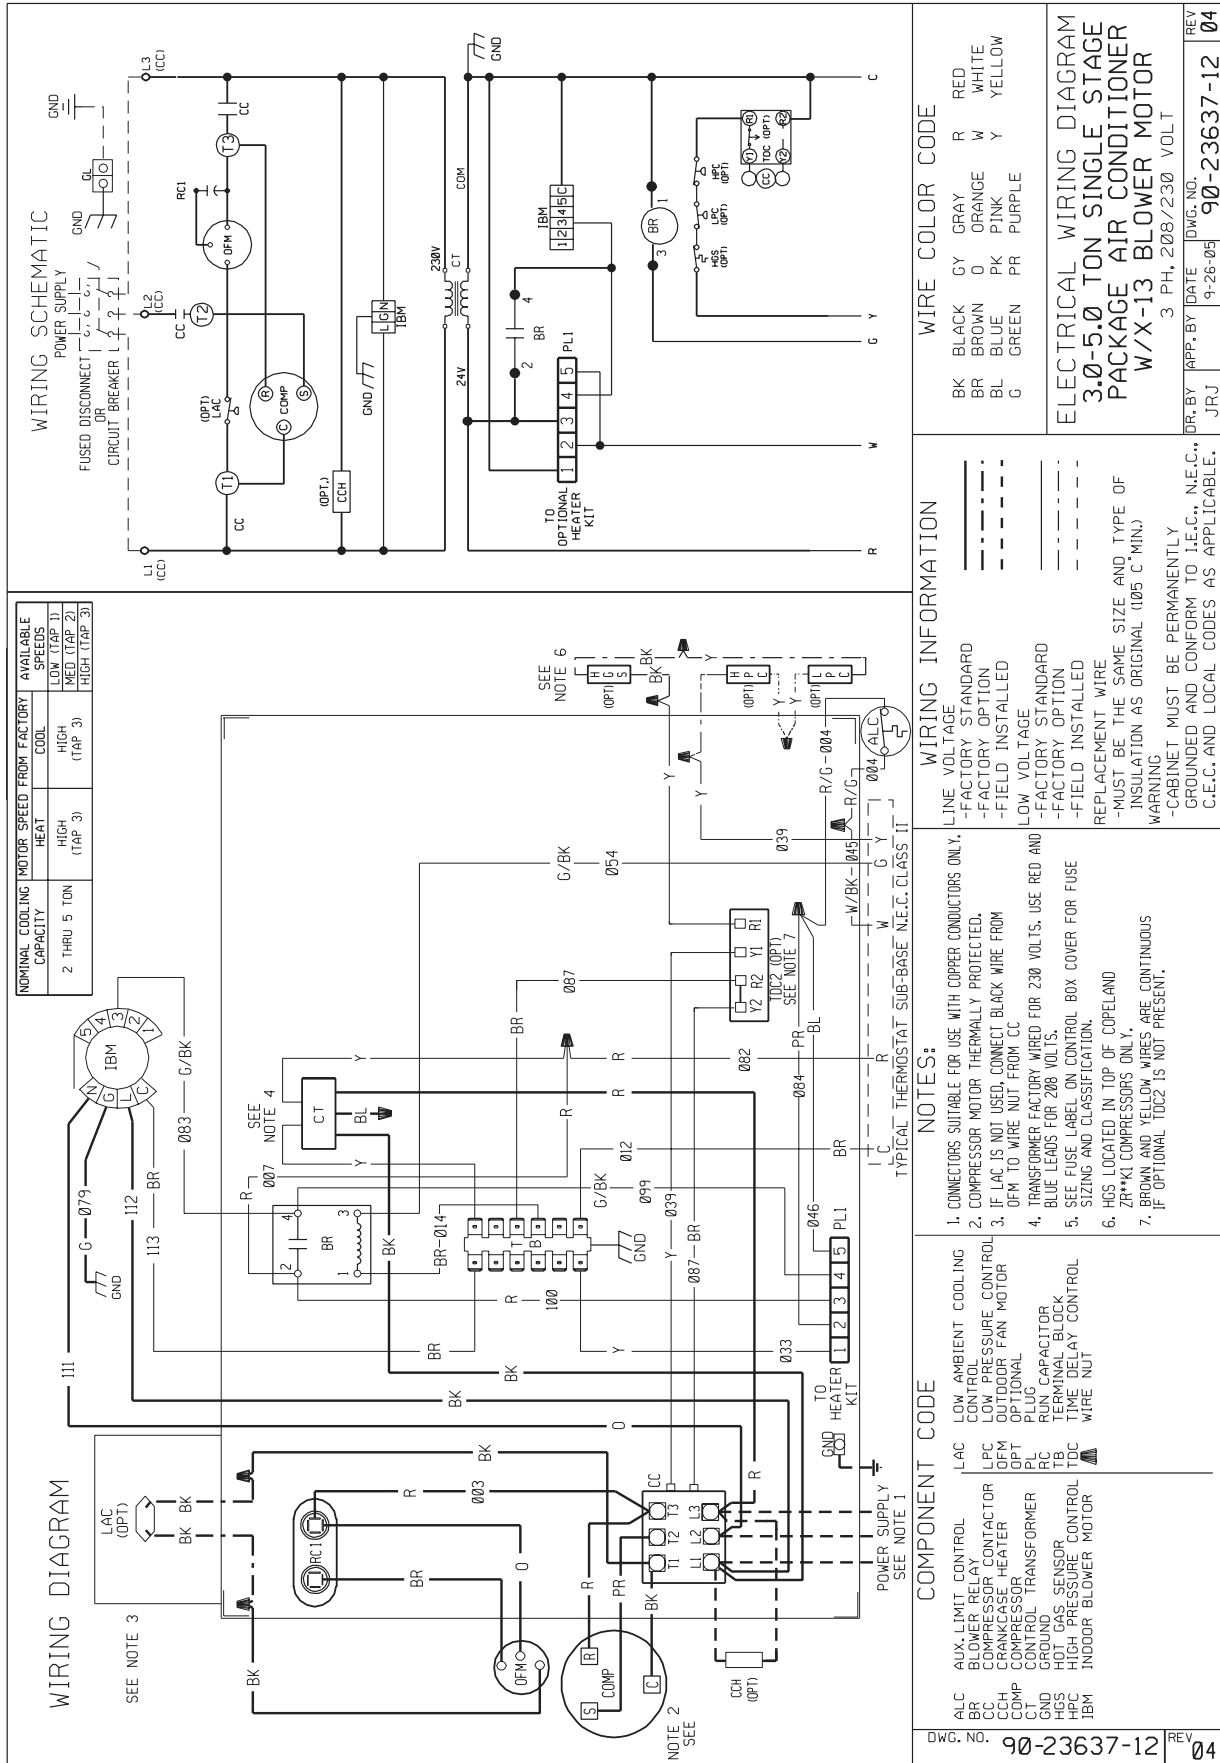

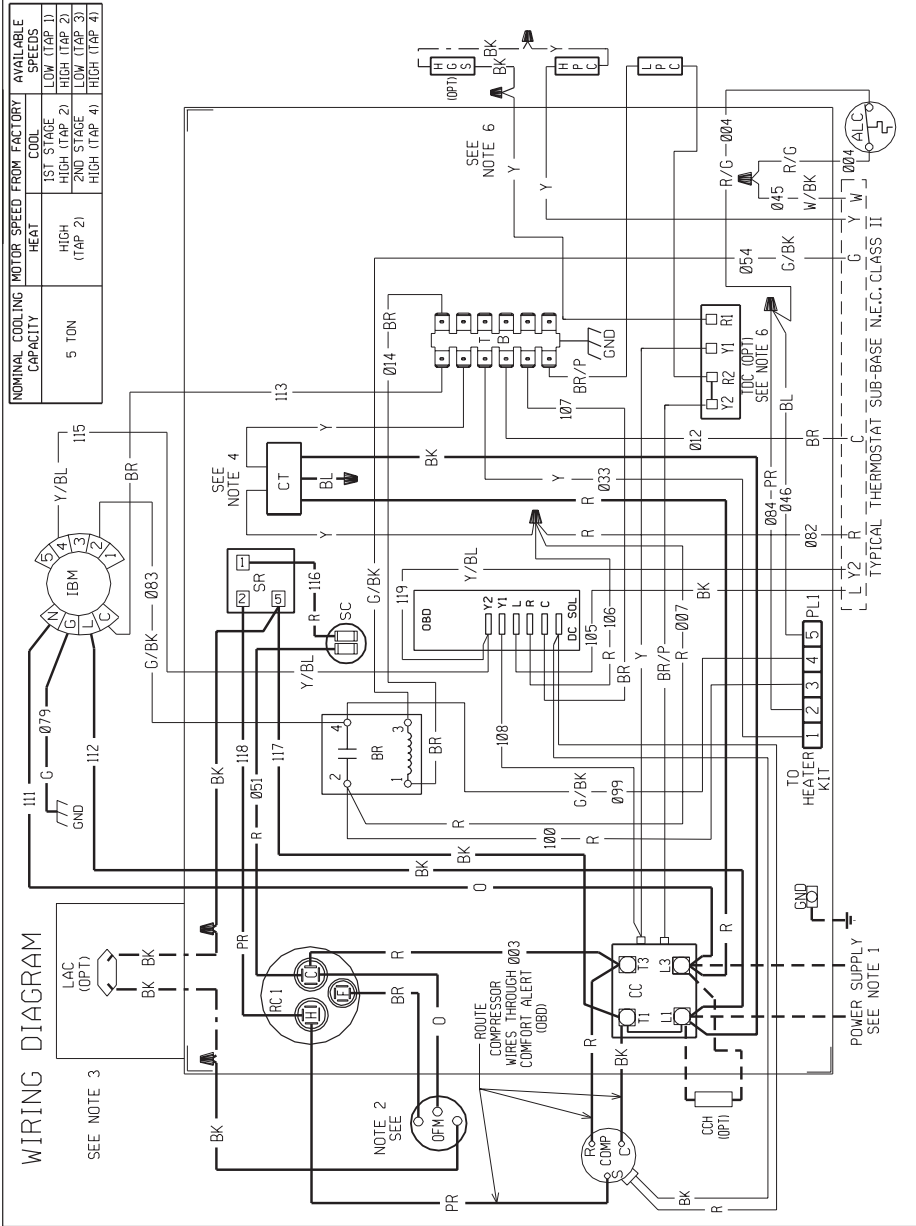

WIRING SCHEMATIC

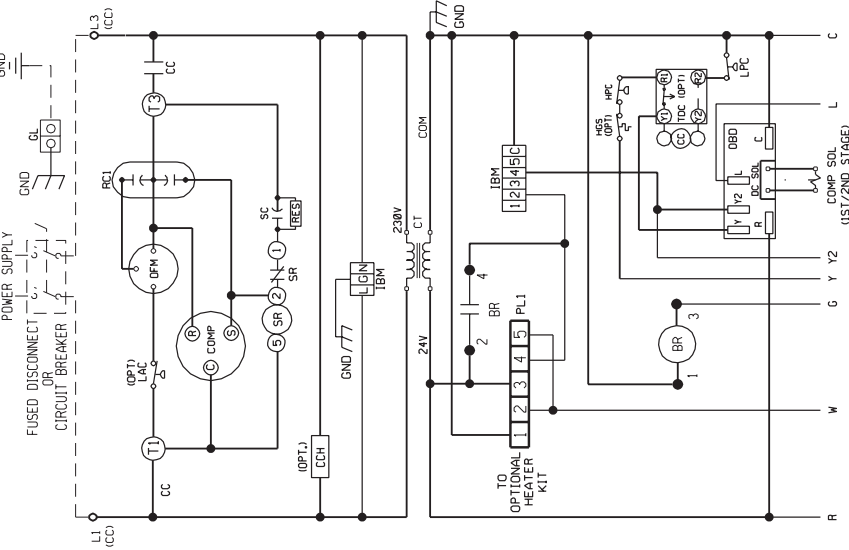

COMPONENT CODE

ALC	AUX. LIMIT CONTROL	LAC	LOW AMBIENT COOLING CONTROL
BR	BLOWER RELAY	LPC	LOW PRESSURE CONTROL
CC	COMPRESSOR CONTACTOR	OBD	ON-BOARD DIAGNOSTICS
CCH	CRANKCASE HEATER	OFM	OUTDOOR FAN MOTOR
COMP	COMPRESSOR	OPT	OPTIONAL PLUG
CTD	CONTROL TRANSFORMER	RC	RUN CAPACITOR
CTD	CONTROL TRANSFORMER	SC	START CAPACITOR
HGS	HOT GAS SENSOR	SR	START RELAY
HPC	HIGH PRESSURE CONTROL	TB	TERMINAL BLOCK
IBM	INDOOR BLOWER MOTOR	TDC	TIME DELAY CONTROL

NOTES:

1. CONNECTORS SUITABLE FOR USE WITH COPPER CONDUCTORS ONLY.
2. COMPRESSOR MOTOR THERMALLY PROTECTED.
3. IF LAC IS NOT USED, CONNECT BLACK WIRE FROM OFM TO WIRE NUT FROM CC
4. TRANSFORMER FACTORY WIRE FOR 230 VOLTS. USE RED AND BLUE LEADS FOR 208 VOLTS.
5. SEE FUSE LABEL ON CONTROL BOX COVER FOR FUSE SIZING AND CLASSIFICATION.
6. BROWN AND YELLOW WIRES ARE CONTINUOUS. IF OPTIONAL LIMITS AND/OR TDC ARE NOT PRESENT.

WIRING INFORMATION


- LINE VOLTAGE
- FACTORY STANDARD
 - FACTORY OPTION
 - FIELD INSTALLED
- LOW VOLTAGE
- FACTORY STANDARD
 - FACTORY OPTION
 - FIELD INSTALLED
- REPLACEMENT WIRE
- MUST BE THE SAME SIZE AND TYPE OF INSULATION AS ORIGINAL (105 C° MIN.)
- WARNING
- CABINET MUST BE PERMANENTLY GROUNDED AND CONFORM TO I.E.C., N.E.C., C.E.C. AND LOCAL CODES AS APPLICABLE.

WIRE COLOR CODE

BK	BLACK	GY	GRAY	R	RED
BR	BROWN	O	ORANGE	W	WHITE
BL	BLUE	PK	PINK	Y	YELLOW
G	GREEN	PR	PURPLE		

ELECTRICAL WIRING DIAGRAM
5.0 TON
PACKAGE AIR CONDITIONER
W/X-13 BLOWER MOTOR

DR. BY	APP. BY	DATE	DWG. NO.	REV
JRJ		11-9-05	90-23637-13	06

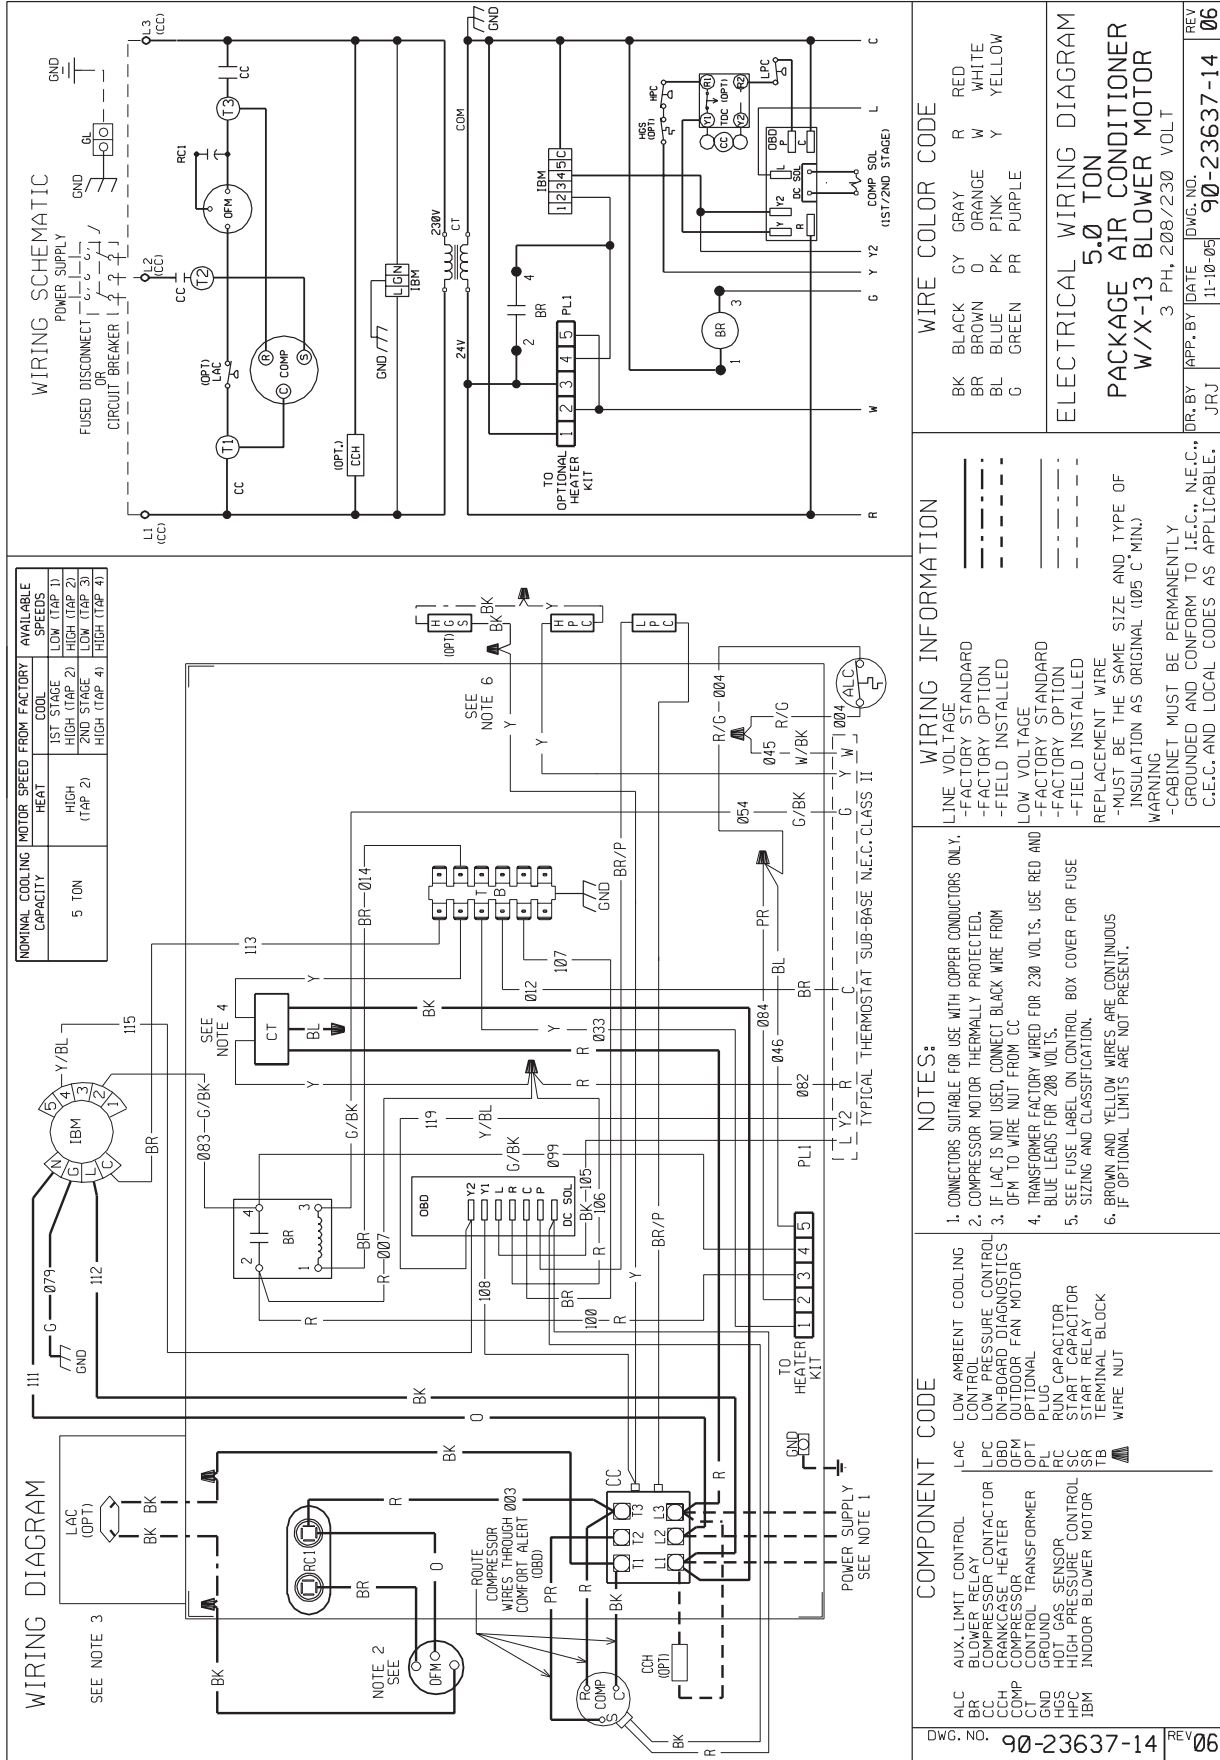

BEFORE PURCHASING THIS APPLIANCE, READ IMPORTANT ENERGY COST AND EFFICIENCY INFORMATION AVAILABLE FROM YOUR RETAILER.

GENERAL TERMS OF LIMITED WARRANTY

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

For Complete Details of the Limited Warranty, Including Applicable Terms and Conditions, See Your Local Installer or Contact the Manufacturer for a Copy.

Condenser Coil and Evaporator Coil leaks caused by factory defects	Five (5) Years
Compressor:	
1-Phase Models	
(Residential Applications)	Ten (10) Years
1 & 3-Phase Models	
(Commercial Applications)	Five (5) Years
Heating Elements	Five (5) Years
Any Other Part	
1-Phase Models	
(Residential Applications)	Five (5) Years
1 & 3-Phase Models	
(Commercial Applications)	One (1) Year

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Ruud Heating,
Cooling and
Water Heating

P.O. Box 17010, Fort Smith, AR 72917



"In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice."