

Warrior Rheemglas® Electric Water Heater for Manufactured Housing



SIDE CONNECT

TOP CONNECT



Available in 20, 30, 40 and 50 Gallon Models

► 1-Year Limited Tank Warranty* ► 1-Year Limited Parts Warranty*

- Lifeguard™ stainless steel element**
- Isolated tank design reduces heat loss
- High efficiency heating elements
- Exclusive Rheemglas® tank lining resists corrosion and prolongs tank life
- Anode rod equalizes aggressive water action
- Automatic temperature control thermostat
- Over-temperature protector automatically cuts off power in excess temperature situations
- Electrical junction box (for 1/2" and 3/4" conduit) placed above heating elements for easy installation
- Meets H.U.D. Safety and Construction Standards, ASHRAE 90A-80 and National Appliance Energy Conservation Act (NAECA) requirements

Design evaluated in accordance with Part 3280.707(d)(1) or (2) of HUD Mobile Home Construction and Safety Standards for Energy Efficiency.

* See Residential Warranty Information Brochure for complete warranty information.

** Standard in side connect models and can be ordered separate in top connect models.

Energy Factor and Average Annual Operating Costs based on D.O.E. (Department of Energy) test procedures. D.O.E. national average fuel rate electricity 10.65¢/KWH.



DESCRIPTION			FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFORMATION	
T Y P E	GAL. CAP.	MODEL NUMBER	FIRST HOUR RATING G.P.H.		RECOVERY IN G.P.H. @ 90° RISE		TANK HEIGHT A	HEIGHT TO WATER CONN. B	DIAMETER C	APPROX. SHIP WT. (LBS.)	ENERGY FACTOR	AVERAGE ANNUAL OPER. COST
			3500 WATTS	4500 WATTS	3500 WATTS	4500 WATTS						
SIDE CONNECT												
T A L L	20	72-20-1	—	—	—	—	31-1/2	25-1/2	17-3/4	62	N/A	N/A
	30	72-30-2	41	46	16	21	45-1/2	39-3/4	17-3/4	70	0.93	\$503
	40	72-40-2	47	51	16	21	46-1/4	40-1/4	19-3/4	94	0.92	\$508
	50	72-52-2	51	56	16	21	57	50-3/4	19-3/4	108	0.91	\$514

Consult factory for other warranty options.

TOP CONNECT												
T A L L	30	82-30-2	43	46	16	21	45-1/2	45-1/2	17-3/4	76	0.93	\$503
	40	82-40-2	49	53	16	21	46-1/2	46-1/2	19-3/4	94	0.92	\$508
	50	82-52-2	56	61	16	21	57	57	19	105	0.91	\$514


Consult factory for other warranty options.

- If heating elements of different wattages than those shown are demanded by zone requirements, they must be specifically requested.
- Heaters furnished with standard 240 volt AC, single phase non-simultaneous wiring, and 3500 watt or 4500 watt heating elements. 72-20 furnished with standard 120 volt AC, single phase, 2000 watt heating element.
- Special Wiring Options – A limited number of special wiring options are available. Consult factory for price and availability.
- For single element, substitute "-1" suffix for "-2".

Recovery = wattage/2.42 x temp. rise °F.
Example: $\frac{4500W}{2.42 \times 90^\circ} = 21 \text{ GPH}$

These units are designed to meet or exceed ANSI (American National Standards Institute) requirements and have been tested according to D.O.E. test procedures and meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria for energy consuming appliances.

Before purchasing this appliance, read important energy cost and efficiency information available from your supplier.

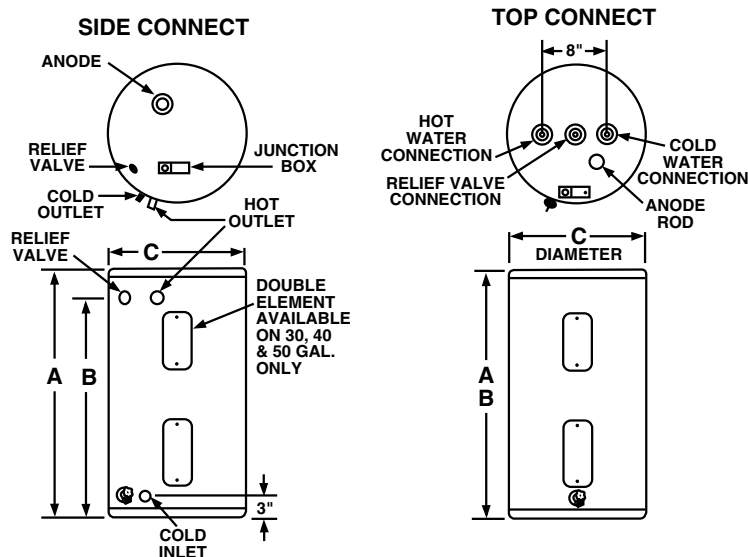

WATER CONNECTIONS
ALL 3/4" N.P.T.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.