



SURE COMFORT™

UP TO 95% A.F.U.E.† DOWNFLOW/ HORIZONTAL GAS FURNACES

The *Sure Comfort™* 90 Plus® High Efficiency line of downflow/horizontal gas furnaces are designed for utility rooms, closets, alcoves, attics or crawl spaces. The GF951D is shipped in the downflow configuration and is easily converted for horizontal **left-hand** airflow applications.

The design is certified by CSA.

Features

- Heat exchanger is constructed of all stainless steel for maximum corrosion resistance and thermal fatigue reliability.
- Low profile “34 inch” design is lighter and easier to handle and leaves room for optional accessories.
- Top electrical connections, left or right gas and condensate drainage connections on downflow models.
- Condensate drain for horizontal application provided standard.
- Integrated control board manages all operational functions and provides hookups for humidifier and electronic air cleaner.
- An insulated blower compartment, a slow-opening gas valve and a specially designed inducer system make it one of the quietest furnaces on the market today.
- Pre-paint galvanized steel cabinet.
- Molded permanent filters.
- Optional indoor or outdoor combustion air.
- Transformer and control fuse protection.
- Control board diagnostics.

A variety of cooling coils and plenums designed to use with the *Sure Comfort™* 90 Plus gas furnaces are available as optional accessories for air conditioning models.


†A.F.U.E. (Annual Fuel Utilization Efficiency) calculated in accordance with Department of Energy test procedures.

GF951D SERIES
Models with Input Rates
from 45 to 105 kBTU
[13.19 to 30.77 kW]
(Models up to 95% A.F.U.E.†)



TABLE OF CONTENTS

Standard & Optional Equipment	3
Physical Data & Specifications	4
Model Number Identification	5
Dimensional Data	6-7
Blower Performance Data	8
Accessories	9
Limited Warranty	10

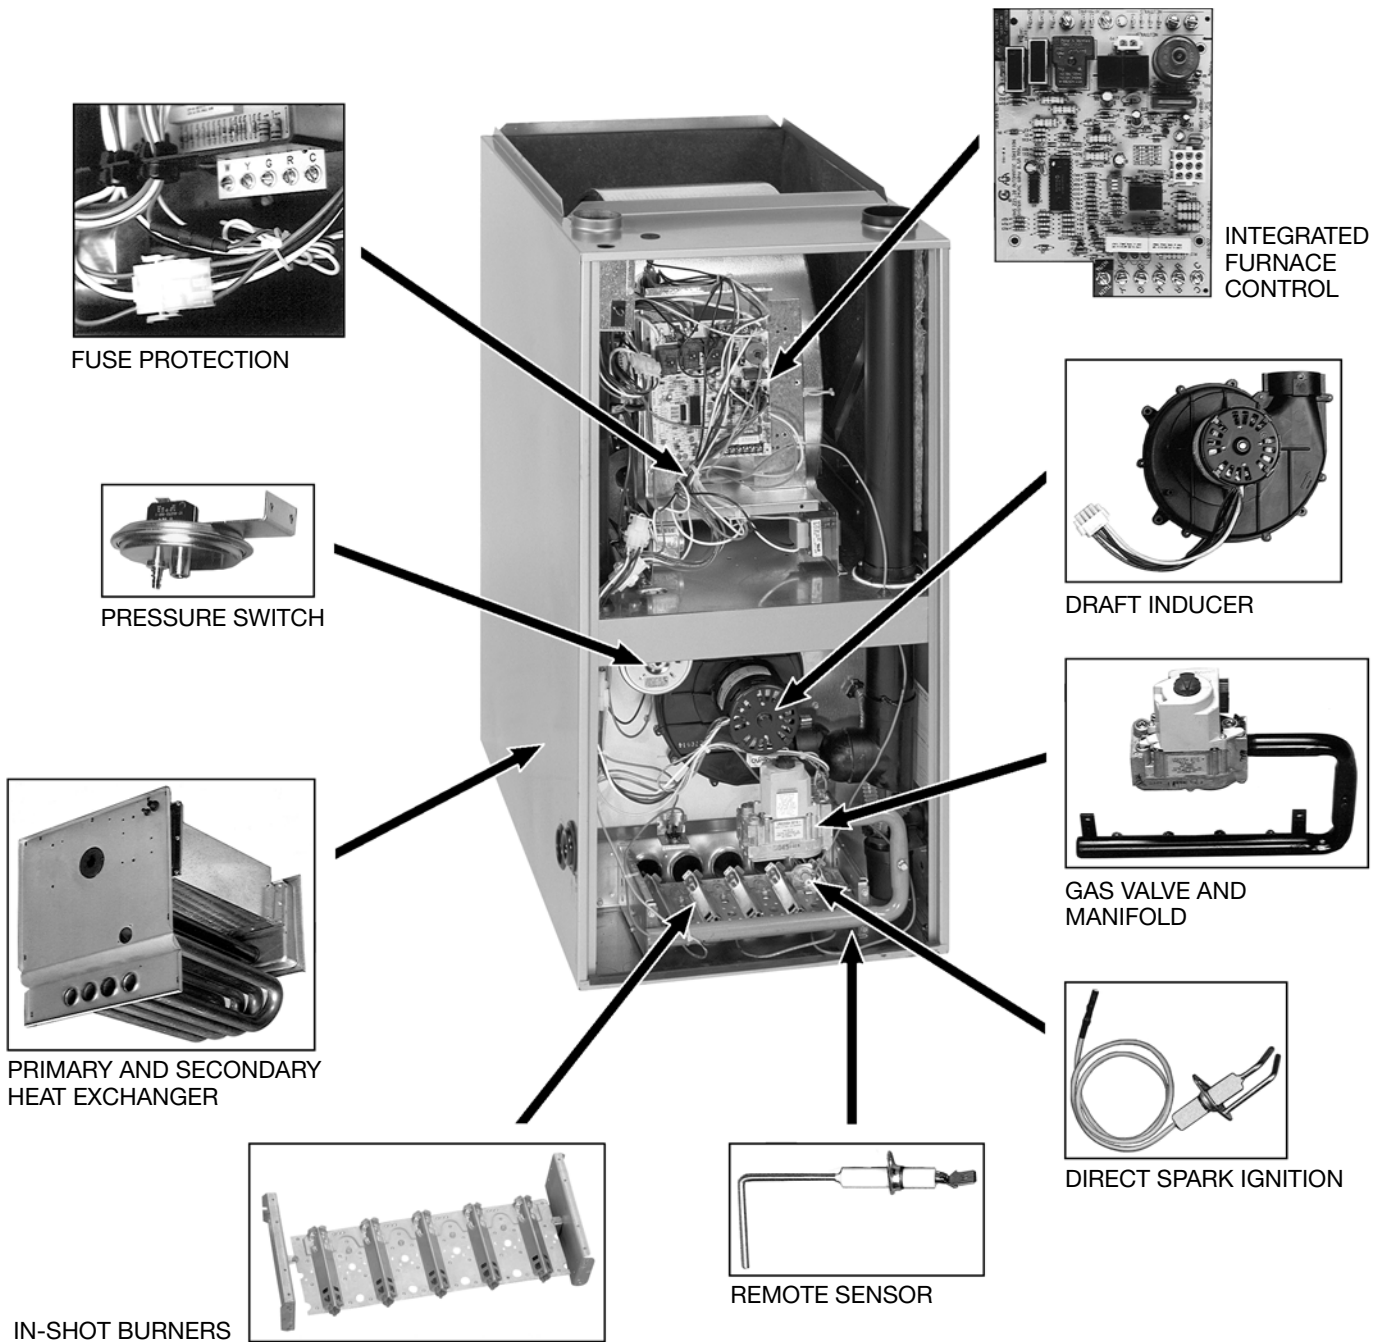

STANDARD EQUIPMENT

Completely assembled and wired; heat exchanger; primary: 409 and aluminized 409 stainless steel, secondary: 29-4C stainless steel; induced draft; pressure switch; redundant main gas control; blower compartment door safety switch; solid state time on/off blower control; limit controls; manual shut-off valve; 100% safety lock out; cool fan off delay; field selectable heat fan off delay; one hour automatic retry; power and self-test diagnostics; flame sense current diagnostics; electronic air cleaner connections; twinning (built-in) features; humidifier connections; humidifier on/off delay; low speed continuous fan option; single speed option for heating and cooling applications; transformer; direct drive, multi-speed blower motor. (Please note: a thermostat is not included as standard equipment.)

OPTIONAL EQUIPMENT

NOTE: Furnace is not listed for use with fuels other than natural or L.P. (propane) gas.

All models can be converted by a qualified distributor or local service dealer to use L.P. (propane) gas without changing burners. Factory approved kits must be used to convert from natural to L.P. (propane) gas and may be ordered as optional accessories from a parts distributor.

For L.P. (propane) operation, refer to Conversion Kit Index Form.

WARNING
 THIS FURNACE IS NOT APPROVED
 OR RECOMMENDED
 FOR USE IN MOBILE HOMES

Physical Data and Specifications—Downflow/Horizontal Models U.S. and Canadian Models

MODEL NUMBERS	GF951D045AS36	GF951D060AS36	GF951D075AW48	GF951D090AS60	GF951D105AS60
INPUT-BTU/HR [kW] ①	45,000 [13.19]	60,000 [17.58]	75,000 [21.98]	90,000 [26.38]	105,000 [30.77]
HEATING CAPACITY BTU/HR [kW]	43,000 [12.61]	58,000 [16.99]	72,500 [21.25]	87,000 [25.50]	101,500 [29.75]
HIGH ALTITUDE INPUT [kW] ②	40,500 [11.87]	54,000 [15.83]	67,500 [19.78]	81,000 [23.74]	94,500 [27.70]
HIGH ALTITUDE OUTPUT CAPACITY [kW] ②	37,000 [10.84]	50,400 [14.77]	63,000 [18.46]	75,000 [21.98]	87,500 [25.64]
BLOWER (D x W) [mm]	11 x 7 [279 x 178]	11 x 7 [279 x 178]	11 x 10 [279 x 254]	12 x 11 [305 x 279]	11 x 10 [279 x 254]
MOTOR H.P. [W] SPEEDS-TYPE	1/2 [373]-4-PSC	1/2 [373]-4-PSC	1/2 [373]-4-PSC	3/4 [559]-4-PSC	3/4 [559]-4-PSC
MOTOR FULL LOAD AMPS	6.8	6.8	6.8	9.5	9.5
HEATING SPEED	MED-LOW	MED-HI	MED-HI	MED-HI	MED-HI
COOLING SPEED	HIGH	HIGH	HIGH	HIGH	HIGH
HEAT EXT. STATIC PRESSURE (IN. W.C.) [kPa]	.10 [.025]	.12 [.029]	.12 [.029]	.15 [.037]	.20 [.049]
RATED EXT. STATIC PRESSURE (IN. W.C.) [kPa]	.50 [.124]	.50 [.124]	.50 [.124]	.50 [.124]	.50 [.124]
HEATING CFM @ .2" W.C. E.S.P. [L/s]	866 [409]	1122 [530]	1516 [716]	1698 [802]	1812 [856]
COOLING CFM @ .5" W.C. E.S.P. [L/s]	1220 [576]	1242 [586]	1559 [736]	1850 [873]	1977 [934]
TEMPERATURE RISE RANGE °F [°C]	30-60 [16.7-33.3]	30-60 [16.7-33.3]	30-60 [16.7-33.3]	30-60 [16.7-33.3]	35-65 [19.4-36.1]
STANDARD FILTER [mm]	(2) 12" x 20" [305 x 508]	(2) 12" x 20" [305 x 508]	(2) 12" x 20" [305 x 508]	(2) 12" x 20" [305 x 508]	(2) 14" x 20" [356 x 508]
APPROX. SHIPPING WEIGHT (LBS.) [kg]	123	126	137	148	160
AFUE ③	95.0%	95.0%	95.0%	95.0%	95.0%

NOTES: All models are 115V, 60HZ, 1Ø. Gas connection size for all models is 1/2" [13 mm] N.P.T.


- ① See Conversion Kit Index Form for high altitude derate.
- ② Canadian installations only.
- ③ In accordance with D.O.E. test procedures.

[] Designates Metric Conversions

Model Number Identification

<u>GF</u>	<u>95</u>	<u>1</u>	<u>D</u>	—	<u>045</u>	<u>A</u>	<u>S</u>	<u>36</u>
Gas Furnace	95% Efficiency	Single Stage	Downflow		Heating Input Designation	A = Variation	Variations	Nominal Cooling Designation
					Input BTU/HR		S = Standard W = Wide Cabinet	36 = 3 Tons 48 = 4 Tons 60 = 5 Tons
					045 = 45,000 [13.19 kW]			
					060 = 60,000 [17.58 kW]			
					075 = 75,000 [20.50 kW]			
					090 = 90,000 [26.38 kW]			
					105 = 105,000 [30.77 kW]			






[] Designates Metric Conversions

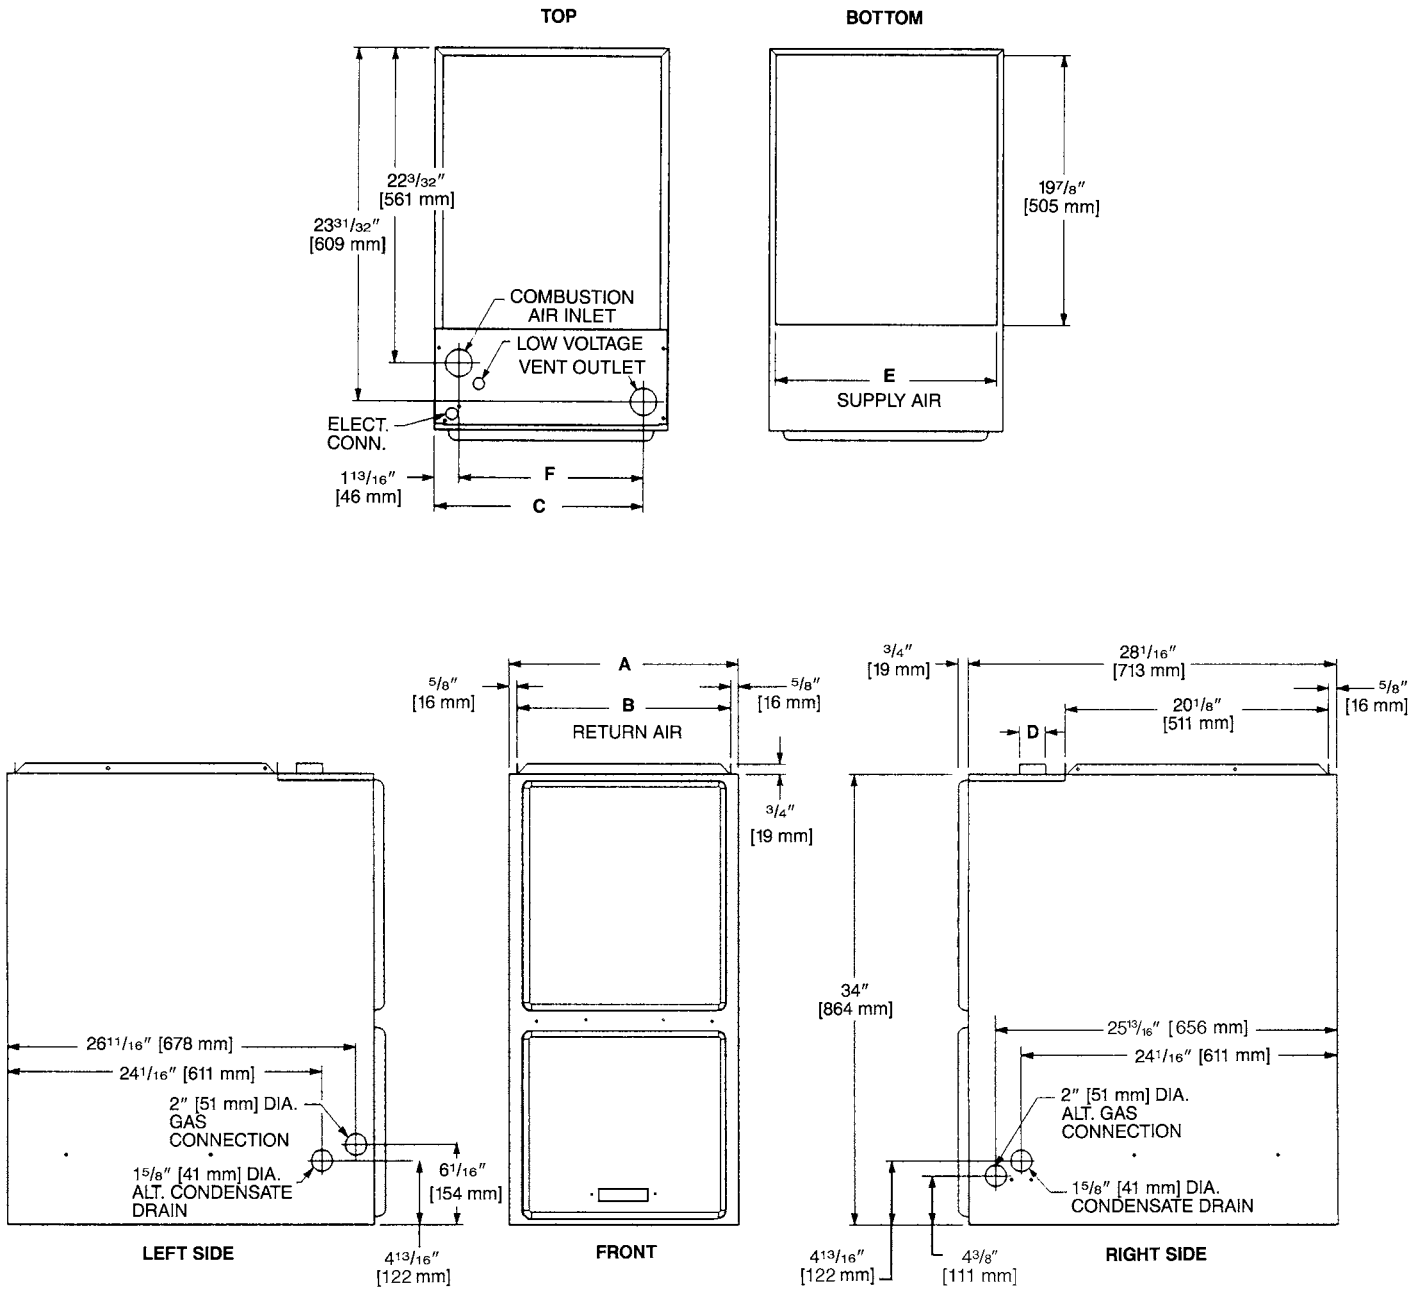

MODEL GF951D	A	B	C	D	E	F	LEFT SIDE	MINIMUM CLEARANCE (IN.) [mm]					SHIP WGTS. [kg]
								RIGHT SIDE	BACK	TOP	FRONT	VENT	
04	17 $1/2$ [445]	16 $11/32$ [415]	15 $5/8$ [397]	2 [51]	16 $5/8$ [422]	13 $7/8$ [352]	0	0	0	1 [25]	2 [51]	0	123 [56]
06	17 $1/2$ [445]	16 $11/32$ [415]	15 $5/8$ [397]	2 [51]	16 $5/8$ [422]	13 $7/8$ [352]	0	0	0	1 [25]	2 [51]	0	126 [57]
07	21 [533]	19 $27/32$ [504]	19 $9/16$ [486]	2 [51]	20 $1/8$ [511]	17 $3/8$ [441]	0	0	0	1 [25]	2 [51]	0	137 [62]
09	21 [533]	19 $27/32$ [504]	19 $9/16$ [486]	2 [51]	20 $1/8$ [511]	17 $3/8$ [441]	0	0	0	1 [25]	2 [51]	0	148 [67]
10	24 $1/2$ [622]	23 $11/32$ [593]	22 $5/8$ [575]	2 [51]	23 $5/8$ [600]	20 $7/8$ [530]	0	0	0	1 [25]	2 [51]	0	160 [73]

[] Designates Metric Conversions

IMPORTANT NOTE: Horizontal furnace may be installed for horizontal left hand air supply **ONLY**. The condensate trap provided for horizontal application must be installed in the field beneath the unit as directed in the furnace Installation & Operating Instructions.

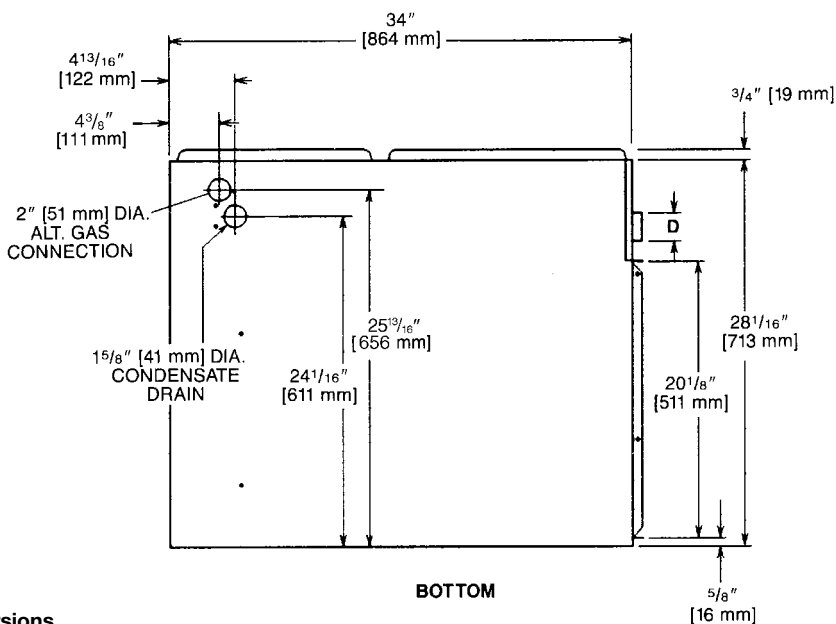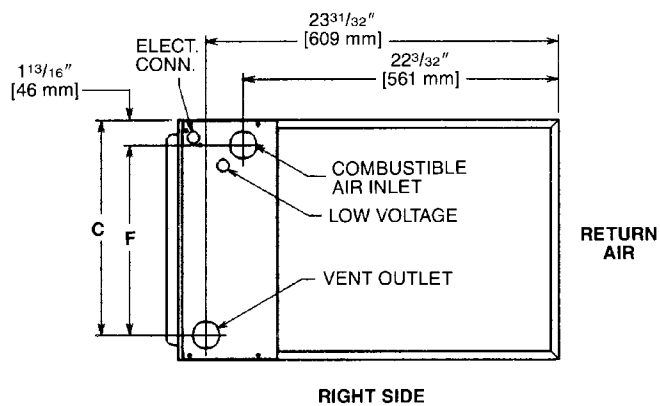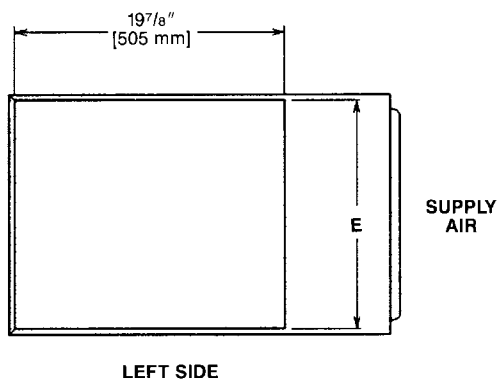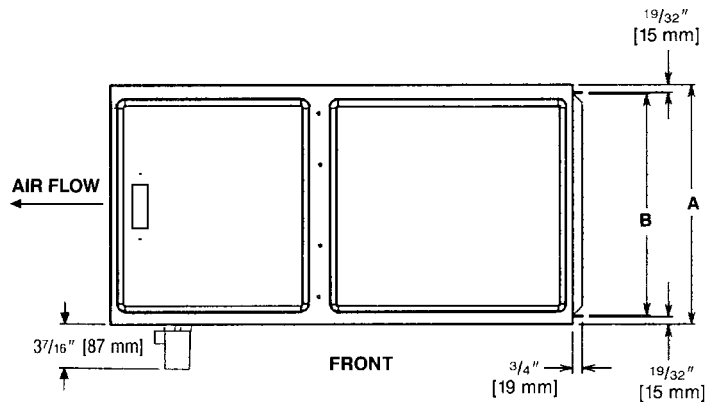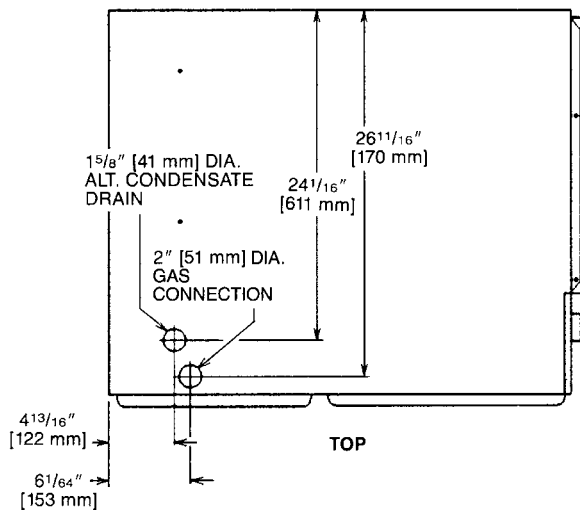

[] Designates Metric Conversions

IMPORTANT NOTE: Horizontal furnace may be installed for horizontal left hand air supply ONLY. The condensate trap provided for horizontal application must be installed in the field beneath the unit as directed in the furnace installation & Operating Instructions.

MODEL GF951D	BLOWER SIZE IN. [mm]	MOTOR H.P. [W]	BLOWER SPEED	CFM [L/s] AIR DELIVERY EXTERNAL STATIC PRESSURE INCHES WATER COLUMN [kPa]						
				0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]
				045	11 x 7 [279 x 178]	1/2 [373]	LOW MED-LO MED-HI HIGH	794 [375] 890 [420] 1110 [524] 1383 [653]	765 [361] 866 [409] 1084 [512] 1350 [638]	735 [347] 842 [398] 1057 [499] 1317 [622]
060	11 x 7 [279 x 178]	1/2 [373]	LOW* MED-LO MED-HI HIGH	816 [385] 924 [436] 1164 [550] 1409 [665]	792 [374] 895 [423] 1122 [530] 1367 [646]	767 [362] 866 [409] 1080 [510] 1325 [626]	739 [349] 832 [393] 1044 [493] 1284 [606]	711 [336] 798 [377] 1008 [476] 1242 [586]	686 [324] 754 [356] 966 [456] 1195 [564]	661 [312] 710 [335] 923 [436] 1148 [542]
075	11 x 10 [279 x 254]	1/2 [373]	LOW* MED-LO MED-HI HIGH	1126 [532] 1338 [632] 1555 [734] 1743 [823]	1097 [518] 1309 [618] 1516 [716] 1696 [801]	1068 [504] 1280 [604] 1477 [698] 1649 [779]	1036 [489] 1253 [592] 1440 [680] 1604 [757]	1003 [473] 1225 [579] 1402 [662] 1559 [736]	963 [455] 1185 [560] 1349 [637] 1501 [709]	923 [436] 1145 [541] 1295 [612] 1442 [681]
090	12 x 11 [305 x 279]	3/4 [559]	LOW* MED-LO MED-HI HIGH	1213 [573] 1504 [710] 1734 [819] 2111 [997]	1196 [565] 1474 [696] 1698 [802] 2059 [972]	1179 [557] 1443 [681] 1662 [785] 2007 [948]	1158 [547] 1415 [668] 1621 [766] 1946 [919]	1136 [536] 1387 [655] 1579 [746] 1885 [890]	1108 [523] 1348 [637] 1526 [721] 1821 [860]	1079 [510] 1308 [618] 1472 [695] 1756 [829]
105	11 x 10 [279 x 254]	3/4 [559]	LOW* MED-LO MED-HI HIGH	1324 [625] 1617 [764] 1842 [870] 2204 [1041]	1309 [618] 1505 [753] 1812 [856] 2153 [1017]	1294 [611] 1573 [743] 1781 [841] 2102 [993]	1272 [601] 1533 [724] 1728 [816] 2040 [963]	1250 [590] 1493 [705] 1674 [791] 1977 [934]	1221 [577] 1448 [684] 1619 [765] 1905 [900]	1191 [562] 1402 [662] 1564 [739] 1833 [866]

NOTE: Recommended heating blower speeds are in bold.

*Not allowed for heating speed tap.

NOTE: CFM values represent furnace-only airflow ratings.

[] Designates Metric Conversions

VENT TERMINATION KITS CONCENTRIC: HORIZONTAL/VERTICAL =

RXGY-E03A (US & Canadian Installations)

HORIZONTAL TWO PIPE: RXGY-D02, RXGY-D03, RXGY-D04
(US Installations)

RXGY-D02A, RXGY-D03A, RXGY-D04A (Canadian Installations)

RXGY-G02 (US Only)

CONDENSATE PUMP KIT: RXGY-B01

NEUTRALIZER KIT: RXGY-A01

COMBUSTIBLE FLOOR BASE: RXGC-B17
RXGC-B21
RXGC-B24

EXTERNAL FILTER RACK: RXGF-CC

FILTER RACK FILTER SIZES* INCHES [mm]	
MODEL GF951D	RXGF-CC
04	(2) 12 x 20 [305 x 508]
06	(2) 12 x 20 [305 x 508]
07	(2) 12 x 20 [305 x 508]
09	(2) 12 x 20 [305 x 508]
10	(2) 14 x 20 [356 x 508]

*Filter racks are shipped without filters.

Filters shipped with furnace may be used or a suitable 1" [25.4 mm] filter.

[] Designates Metric Conversions

PLENUM DATA FOR "A" COILS

Plenum adapters are required in some instances for use on downflow applications when plenum and furnace size do not match.

FURNACE WIDTH IN. [mm]	PLENUM WIDTH IN. [mm]	PLENUM ADAPTER DOWNFLOW	COIL PLENUM
17 1/2 [445]	16 1/4 [413]	RXAA-C186	RXAL-B16BU
17 1/2 [445]	20 1/4 [514]	RXAA-C173	RXAL-B20BU
17 1/2 [445]	21 5/8 [549]	RXAA-C187	RXAL-B21BU
17 1/2 [445]	25 1/4 [641]	RXAA-C174	RXAL-B25BU
21 [533]	25 1/4 [641]	RXAA-C175	RXAL-B25BU
21 [533]	22 1/4 [565]	RXAA-C176	RXAL-B22BU
21 [533]	21 5/8 [549]	RXAA-C188	RXAL-B21BU
24 1/2 [622]	25 1/4 [641]	RXAA-C177	RXAL-B25BU
24 1/2 [622]	21 5/8 [549]	RXAA-C187	RXAL-B21BU

FOSSIL FUEL KIT: RXPF-F01 RXPF-F02 (TVA)

FOR HIGH ALTITUDES

NOTE: For Canadian installations only, an optional derate (manifold gas pressure reduction) method may be used to adjust the furnace for altitude. See Installation Instructions for more information. This optional method may **NOT** be used for U.S. installations.

FOR LEFT SIDE (ALTERNATE) CONDENSATE DRAIN KIT: RXGY-H01 (All Models)

GENERAL TERMS OF LIMITED WARRANTY*

Sure Comfort™ will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

PartsFive (5) Years
Heat ExchangerTwenty (20) Years

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Sure Comfort™

P.O. Box 17010, Fort Smith, AR 72917



"In keeping with its policy of continuous progress and product improvement, Sure Comfort™ reserves the right to make changes without notice."