




# SALES FACT SHEET

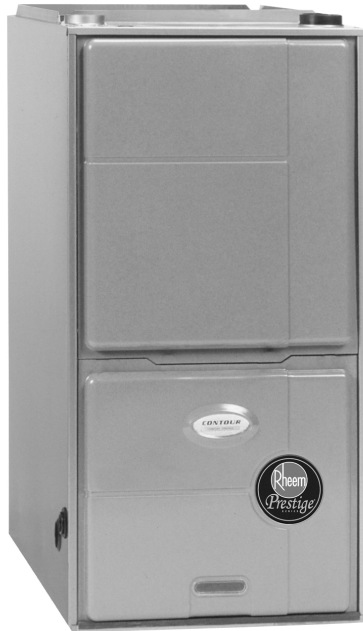

## Rheem *Prestige* S E R I E S

### 90 PLUS<sup>®</sup> MODULATING DOWNFLOW GAS FURNACES WITH *CONTOUR* *COMFORT CONTROL*<sup>®</sup>

#### RGGD- SERIES

Models with Input Rates  
from 60,000 to 120,000 BTU/HR  
[17.58 to 35.16 kW]

(U.S. & Canadian Models)

#### GENERAL TERMS OF LIMITED WARRANTY

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

Primary and Secondary Heat Exchanger . . . . . Limited Lifetime  
All Other Parts . . . . . Five (5) Years

\*For Complete Details of the Limited Warranty, Including Applicable Terms and Conditions, See Your Local Installer or Contact the Manufacturer for a Copy.

#### Features

- Heat exchanger is constructed of all stainless steel for maximum corrosion resistance and thermal fatigue reliability.
- Modulating Function: when used with a modulating thermostat, modulation rate between 40% and 100% of total capacity.
- Two-stage Function: when used with a two-stage thermostat, furnace operates at 40% on low-fire, and stages up to 65%, then 100% for high fire.
- Multistage Function: when used with a single-stage thermostat, furnace operates at 40%, 65% and 100% of total capacity.
- Reduced firing rates, electrically efficient ECM2+ motor, and solid doors provide the ultimate in quiet operation.
- Low speed constant fan.
- Constant temperature rise for superior comfort.
- Seven segment LED for system diagnostics.
- Diagnostic history for troubleshooting.
- Two-speed induced draft motor.
- Direct spark ignition with remote sense.
- Top electrical connections, left or right gas and condensate drainage connections on downflow models.
- Optional indoor or outdoor combustion air.

A variety of cooling coils and plenums designed to use with the *Prestige Series*<sup>®</sup> 90 Plus gas furnaces are available as optional accessories.

MODEL	INPUT-MAX. BTU/HR [kW]	INPUT-MIN. BTU/HR [kW]	HEATING CFM-MAX. W.C. E.S.P. [L/s]	HEATING CFM-MIN. W.C. E.S.P. [L/s]	COOLING CFM-RANGE W.C. E.S.P. [L/s]	APPROX. SHIP. WT. (LBS.) [kg]	PRICE
RGGD-06EMCK	60,000 [17.58]	24,000 [7.03]	795 [375]	320 [151]	600-1200 [283-566]	127 [57.6]	
RGGD-07EMCK	75,000 [21.98]	30,000 [8.79]	995 [470]	430 [203]	600-1200 [283-566]	133 [60.3]	
RGGD-09EZCM	90,000 [26.38]	36,000 [10.55]	1195 [564]	515 [243]	1200-2000 [566-944]	158 [71.7]	
RGGD-10EZCM	105,000 [30.77]	42,000 [12.31]	1395 [658]	600 [283]	1200-2000 [566-944]	162 [73.5]	
RGGD-12ERCM	120,000 [35.17]	48,000 [14.07]	1595 [753]	685 [323]	1200-2000 [566-944]	170 [77.1]	

