



## Ruud *Value Series* Downflow/ Horizontal Gas Furnace





## **RGTS- Series**

Up to 92.4% A.F.U.E.† Input Rates 45-120 kBTU








†A.F.U.E. (Annual Fuel Utilization Efficiency) calculated in accordance with Department of Energy test procedures.

- The Ruud Value Series 90 High Efficiency line of downflow/ horizontal gas furnaces are designed for utility rooms, closets, alcoves, attics or crawl spaces. The RGTS is shipped in the downflow configuration and is easily converted for horizontal left-hand airflow applications.
- The design is certified by CSA.
- Low profile "34 inch" design is lighter and easier to handle and leaves room for optional accessories.
- Top electrical connections, left or right gas and condensate drainage connections on downflow models.
- Condensate drain for horizontal application provided standard.

- Integrated control board manages all operational functions and provides hookups for an electronic air cleaner.
- A slow-opening gas valve and a specially designed inducer system make it one of the quietest furnaces on the market today.
- Galvanized steel cabinet.
- Optional indoor or outdoor combustion air.
- Control board diagnostics.
- A variety of cooling coils and plenums designed to use with the Ruud Value Series 90 gas furnaces are available as optional accessories for air conditioning models.

# © TABLE OF CONTENTS ©

3
4
5
6-7
8
9
10

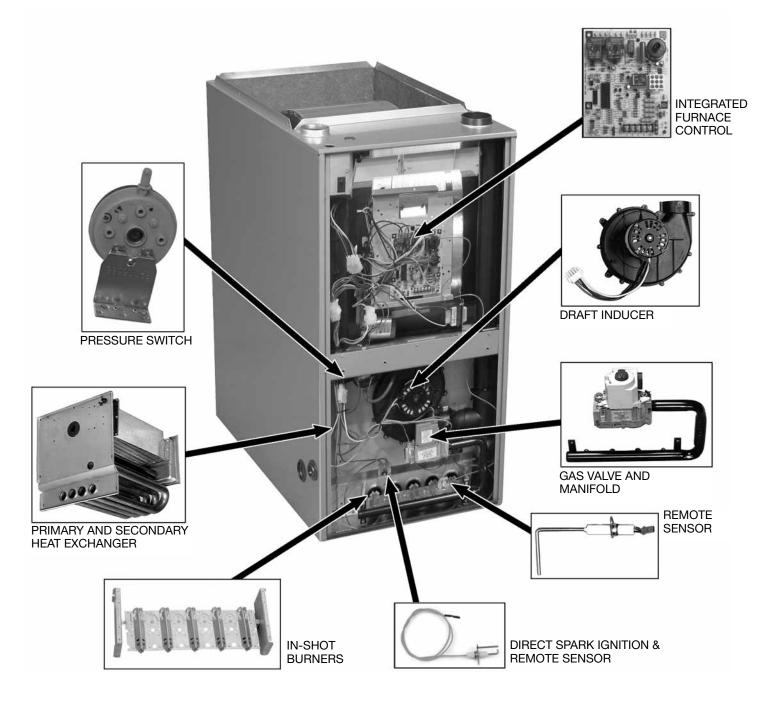

## STANDARD EQUIPMENT

Completely assembled and wired; heat exchanger; primary: aluminized steel, secondary: 29-4C stainless steel; induced draft; pressure switch; redundant main gas control; blower compartment door safety switch; solid state time on/off blower control; limit controls; manual shut-off valve; 100% safety lock out; cool fan off delay; field selectable heat fan off delay; one hour automatic retry; self-test diagnostics; control diagnostics; electronic air cleaner connections; pressure regulator for natural and L.P. (propane) gases; transformer; direct drive, multi-speed blower motor. (Please note: a thermostat is not included as standard equipment.)

## **OPTIONAL EQUIPMENT**

(See Accessory Page)

All models can be converted by a qualified distributor or local service dealer to use L.P. (propane) gas without changing burners. Factory approved kits must be used to convert from natural to L.P. (propane) gas and may be ordered as optional accessories from a parts distributor.

For L.P. (propane) operation, refer to Conversion Kit Index Form.

## WARNING

THIS FURNACE IS NOT APPROVED OR RECOMMENDED FOR USE IN MOBILE HOMES

# Physical Data and Specifications—Downflow/Horizontal Models U.S. and Canadian Models

MODEL NUMBERS RGTS- SERIES	04EMAES	06EMAES	07EMAES	07EYBGS	09EZAGS	09EZAJS	10EZAJS	12ERAJS
INPUT-BTU/HR [kW] ①	45,000 [13.19]	60,000 [17.58]	75,000 [21.98]	75,000 [21.98]	90,000 [26.37]	90,000 [26.37]	105,000 [30.77]	120,000 [35.17]
HEATING CAPACITY BTU/HR [kW]	42,000 [12.31]	56,000 [16.41]	70,000 [20.51]	70,000 [20.51]	84,000 [24.61]	84,000 [24.61]	97,000 [28.43]	113,000 [33.12]
HIGH ALTITUDE INPUT [kW] ②	40,500 [11.87]	54,000 [15.83]	67,500 [19.78]	67,500 [19.78]	81,000 [23.73]	81,000 [23.73]	94,500 [27.70]	108,000 [31.65]
HIGH ALTITUDE OUTPUT CAPACITY [kW] ②	37,800 [11.07]	50,400 [14.77]	63,000 [18.46]	63,000 [18.46]	76,000 [22.27]	76,000 [22.27]	87,500 [25.64]	100,000 [29.31]
BLOWER (D x W) [mm]	11 x 7 [279 x 178]	11 x 7 [279 x 178]	11 x 7 [279 x 178]	12 x 7 [305 x 178]	12 x 11 [305 x 279]	12 x 11 [305 x 279]	12 x 11 [305 x 279]	11 x 10 [279 x 254]
MOTOR H.P. [W] SPEEDS-TYPE	1/2 [373] 4-PSC	1/2 [373] 3-PSC	1/2 [373] 3-PSC	3/4 [559] 3-PSC	1/2 [373] 3-PSC	3/4 [559] 3-PSC	3/4 [559] 3-PSC	3/4 [559] 3-PSC
MOTOR FULL LOAD AMPS	6.8	6.8	6.8	9.5	8.0	9.5	9.5	9.5
HEATING SPEED	Med-Low	Low	Med	Low	Med	Low	Low	Low
COOLING SPEED	High							
HEAT EXT. STATIC PRESSURE (IN. W.C.) [kPA]	.10 [.025]	.12 [.029]	.12 [.029]	.12 [.029]	.15 [.037]	.15 [.037]	.20 [.049]	.20 [.049]
RATED EXT. STATIC PRESSURE (IN. W.C.) [kPA]	.50 [.12]	.50 [.12]	.50 [.12]	.50 [.12]	.50 [.12]	.50 [.12]	.50 [.12]	.50 [.12]
HEATING C.F.M. @ .2" W.C. E.S.P. [L/s]	890 [420]	885 [418]	1060 [500]	1275 [602]	1400 [661]	1400 [661]	1425 [673]	1565 [739]
COOLING C.F.M. @ .5" W.C. E.S.P. [L/s]	1220 [576]	1180 [557]	1150 [543]	1625 [767]	1570 [740]	1850 [873]	1820 [859]	2040 [963]
TEMPERATURE RISE RANGE °F [°C]	30-60 [16.7-33.3]	40-70 [22.2-38.9]	45-75 [25-41.7]	35-65 [19.4-36.1]	35-65 [19.4-36.1]	35-65 [19.4-36.1]	50-80 [27.8-44.4]	50-80 [27.8-44.4]
STANDARD FILTER [mm]	(2) 12" x 20" [305 x 508]	(2) 14" x 20" [609 x 508]						
APPROX. SHIPPING WEIGHT (LBS.) [kG]	111 [50.3]	117 [53.1]	123 [55.8]	123 [55.8]	148 [67.1]	148 [67.1]	152 [68.9]	160 [72.6]
AFUE ③	92.0%	92.4%	92.0%	92.3%	92.4%	92.4%	92.0%	92.1%
CALIFORNIA SEASONAL EFFICIENCY ③	84.35%	86.46%	89.96%	85.00%	86.40%	86.40%	87.02%	87.37%

NOTES: All models are 115V, 60HZ, 1ø. Gas connection size for all models is 1/2" [13 mm] N.P.T.


① See Conversion Kit Index Form for high altitude derate.

② Canadian installations only.③ In accordance with D.O.E. test procedures.

## **Model Number Identification**

<u>R</u>	<u>G</u>	Ţ	<u>s</u>	<u> </u>	<u>)4E</u>	<u>M</u>	<u>A</u>	Ē	<u>s</u>
R U U D	Gas Furnace	T = Downflow/ Condensing	Design Series S = 3rd Design Series	Heating Inp Electric Ignition 04E 06E 07E 09E 10E 12E	hut Designation    Input BTU/HR [kW]	Blower Designation [mm]	Variations <b>A</b> = Std. <b>B</b> = Wide Cabinet	Heating & Cooling Designation  E = 1100-1300(3R)  G = 1500-1700(4R)  J = 1900-2100(5R)	Fuel Designation  S = Natural Gas -


## **Downflow Models**

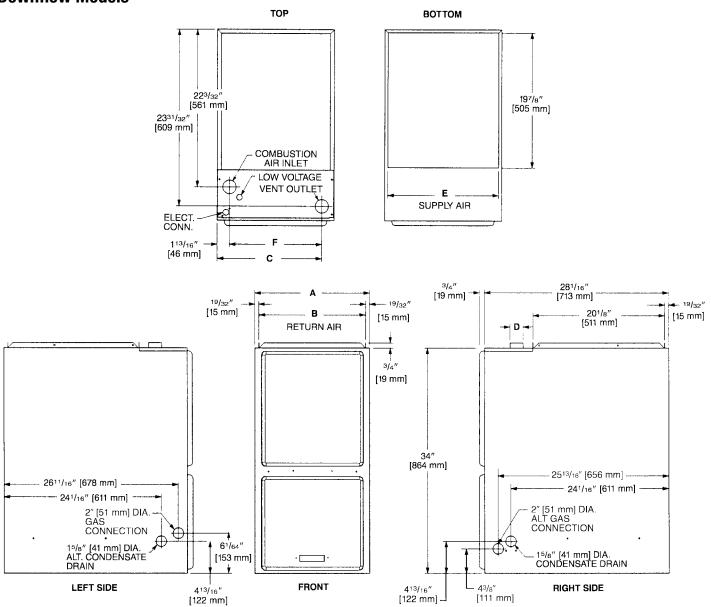

MODEL							LEFT	MINIMUM CLEARANCE (IN.) [mm]					SHIP
RGTS-	Α	В	C	D	E	F	SIDE	RIGHT SIDE	BACK	ТОР	FRONT	VENT	WGTS. [kg]
04	171/2 [445]	16 <sup>11</sup> /32 [415]	155/8 [397]	2 [51]	165/8 [422]	137/8 [352]	0	0	0	1 [25]	2 [51]	0	111 [50]
06	171/2 [445]	16 <sup>11</sup> /32 [415]	155/8 [397]	2 [51]	165/8 [422]	137/8 [352]	0	0	0	1 [25]	2 [51]	0	117 [53]
07EM	171/2 [445]	16 <sup>11</sup> /32 [415]	155/8 [397]	2 [51]	165/8 [422]	137/8 [352]	0	0	0	1 [25]	2 [51]	0	123 [56]
07EY	21 [533]	19 <sup>27</sup> / <sub>32</sub> [504]	19 <sup>3</sup> / <sub>16</sub> [486]	2 [51]	201/8 [511]	17 <sup>3</sup> /8 [441]	0	0	0	1 [25]	2 [51]	0	123 [56]
09	21 [533]	19 <sup>27</sup> / <sub>32</sub> [504]	19 <sup>3</sup> / <sub>16</sub> [486]	2 [51]	201/8 [511]	17 <sup>3</sup> /8 [441]	0	0	0	1 [25]	2 [51]	0	148 [67]
10	21 [533]	19 <sup>27</sup> / <sub>32</sub> [504]	19 <sup>3</sup> / <sub>16</sub> [486]	2 [51]	201/8 [511]	17 <sup>3</sup> /8 [441]	0	0	0	1 [25]	2 [51]	0	152 [69]
12	241/2 [622]	2311/32 [593]	225/8 [575]	2 [51]	235/8 [600]	207/8 [530]	0	0	0	1 [25]	2 [51]	0	160 [73]

IMPORTANT NOTE: Horizontal furnace maybe installed for horizontal left hand air supply ONLY. The condensate trap provided for horizontal application must be installed in the field beneath the unit as directed in the furnace Installation & Operating Instructions.

## **Horizontal Models**

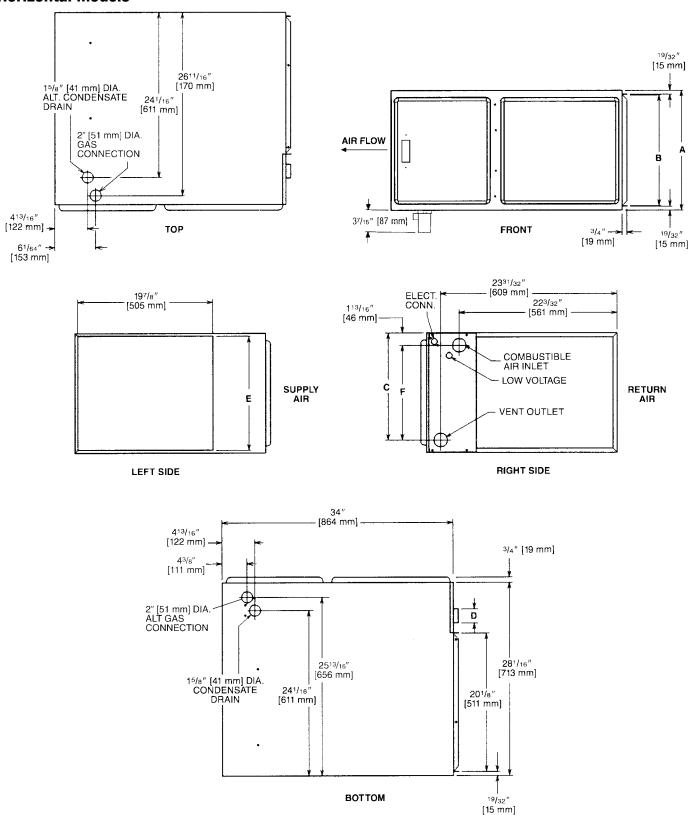

IMPORTANT NOTE: Horizontal furnace may be installed for horizontal left hand air supply ONLY. The condensate trap provided for horizontal application must be installed in the field beneath the unit as directed in the furnace Installation & Operating Instructions.

## **Blower Performance Data—RGTS Models**

MODEL RGTS-	BLOWER SIZE	MOTOR H.P.												BLOWER Speed		EXT	CFI Ternal Static Pr	N [L/s] AIR DELIVE Essure inches v		(Pa]	
nu 13-	IN. [mm]	[W]	SPEED	0.1 [.02]	0.2 [.05]	0.3 [.07]	0.4 [.10]	0.5 [.12]	0.6 [.15]	0.7 [.17]											
04EMAES	11 x 7 [279 x 178]	1/2 [373]	LOW <b>MED-LO</b> MED-HI HIGH	820 [387] <b>930 [439]</b> 1150 [543] 1414 [667]	790 [373] <b>890 [420]</b> 1120 [528] 1365 [644]	760 [359] <b>850 [401]</b> 1090 [514] 1320 [622]	725 [342] <b>815 [384]</b> 1045 [493] 1270 [599]	690 [326] <b>785 [370]</b> 1002 [473] 1220 [576]	650 [306] <b>750 [354]</b> 950 [448] 1165 [550]	610 [288] <b>720 [340]</b> 900 [425] 1115 [526]											
06EMAES	11 x 7 [279 x 178]	1/2 [373]	LOW MED HIGH	<b>910 [429]</b> 1115 [526] 1365 [644]	<b>885 [418]</b> 1080 [510] 1315 [620]	<b>860 [406]</b> 1045 [493] 1270 [600]	<b>815 [384]</b> 1005 [474] 1225 [578]	<b>770 [363]</b> 965 [455] 1180 [557]	<b>725 [342]</b> 920 [434] 1125 [491]	<b>680 [321]</b> 875 [413] 1070 [505]											
07EMAES	11 x 7 [279 x 178]	1/2 [373]	LOW <b>MED</b> HIGH	890 [420] <b>1100 [519]</b> 1340 [632]	860 [406] <b>1060 [500]</b> 1295 [611]	835 [394] <b>1025 [484]</b> 1250 [590]	790 [373] <b>980 [462]</b> 1200 [566]	750 [354] <b>940 [443]</b> 1150 [543]	705 [332] <b>890 [420]</b> 1090 [514]	660 [311] <b>845 [399]</b> 1025 [484]											
07EYBGS	12 x 7 [305 x 178]	3/4 [559]	LOW MED HIGH	<b>1405 [668]</b> 1595 [753] 1835 [866]	<b>1375 [649]</b> 1560 [736] 1780 [840]	<b>1350 [637]</b> 1525 [720] 1730 [816]	<b>1310 [618]</b> 1480 [698] 1675 [791]	<b>1270 [599]</b> 1440 [679] 1625 [767]	<b>1235 [583]</b> 1380 [651] 1555 [734]	<b>1195 [564]</b> 1325 [625] 1480 [698]											
09EZAGS	12 x 11 [305 x 279]	1/2 [373]	LOW <b>MED</b> HIGH	1155 [545] <b>1420 [670]</b> 1605 [757]	1125 [531] <b>1400 [661]</b> 1575 [743]	1100 [519] <b>1380 [651]</b> 1550 [732]	1080 [510] <b>1365 [644]</b> 1560 [736]	1060 [500] <b>1350 [637]</b> 1570 [740]	1000 [472] <b>1260 [594]</b> 1480 [698]	940 [443] <b>1175 [554]</b> 1395 [656]											
09EZAJS	12 x 11 [305 x 279]	3/4 [559]	LOW MED HIGH	<b>1420 [670]</b> 1605 [757] 2005 [946]	<b>1400 [661]</b> 1575 [743] 1965 [927]	<b>1380 [651]</b> 1550 [732] 1930 [910]	<b>1365 [644]</b> 1560 [736] 1890 [892]	<b>1350 [637]</b> 1570 [740] 1850 [873]	<b>1260 [594]</b> 1480 [698] 1765 [833]	<b>1175 [554]</b> 1395 [656] 1680 [793]											
10EZAJS	12 x 11 [305 x 279]	3/4 [559]	LOW MED HIGH	<b>1460 [689]</b> 1680 [793] 2055 [970]	<b>1425 [672]</b> 1645 [776] 2000 [944]	<b>1390 [656]</b> 1615 [762] 1940 [915]	<b>1375 [649]</b> 1585 [748] 1880 [887]	<b>1360 [642]</b> 1560 [736] 1820 [859]	<b>1280 [604]</b> 1490 [703] 1745 [823]	<b>1200 [566]</b> 1420 [670] 1675 [790]											
12ERAJS	11 x 10 [279 x 245]	3/4 [559]	LOW MED HIGH	<b>1590 [750]</b> 1840 [868] 2315 [1093]	<b>1565</b> [ <b>738</b> ] 1820 [860] 2250 [1062]	<b>1540 [727]</b> 1800 [850] 2185 [1031]	<b>1505 [710]</b> 1750 [826] 2110 [996]	<b>1475 [696]</b> 1700 [802] 2040 [963]	<b>1425 [672]</b> 1645 [776] 1965 [927]	<b>1375 [649]</b> 1590 [750] 1890 [892]											

NOTE: Recommended blower speeds are in bold.

NOTE: CFM values represent furnace-only airflow ratings.

## **VENT TERMINATION KITS CONCENTRIC:** HORIZONTAL/VERTICAL =

RXGY-E03A (US & Canadian Installations)

HORIZONTAL TWO PIPE: RXGY-D02, RXGY-D03, RXGY-D04 (US Installations)

RXGY-D02A, RXGY-D03A, RXGY-D04A (Canadian Installations)

RXGY-G02 (US Only)

CONDENSATE PUMP KIT: RXGY-B01 NEUTRALIZER KIT: RXGY-A01


FOSSIL FUEL KIT: RXPF-F01, RXPF-F02 (TVA)

## PLENUM DATA FOR "A" COILS

Plenum adapters are required in some applications when plenum and furnace size do not match.

FURNACE WIDTH In. [mm]	PLENUM WIDTH In. [mm]	PLENUM ADAPTER Downflow	COIL PLENUM
171/2 [445]	16¹/4 [413]	RXAA-C186	RXAL-B16BU
171/2 [445]	201/4 [514]	RXAA-C173	RXAL-B20BU
171/2 [445]	215/8 [549]	RXAA-C187	RXAL-B21BU
171/2 [445]	25 <sup>1</sup> / <sub>4</sub> [641]	RXAA-C174	RXAL-B25BU
21 [533]	25 <sup>1</sup> /4 [641]	RXAA-C175	RXAL-B25BU
21 [533]	221/4 [565]	RXAA-C176	RXAL-B22BU
21 [533]	215/8 [549]	RXAA-C188	RXAL-B21BU
241/2 [622]	251/4 [641]	RXAA-C177	RXAL-B25BU
241/2 [622]	215/8 [549]	RXAA-C187	RXAL-B21BU

#### COMBUSTIBLE FLOOR BASE: RXGC-B17, RXGC-B21, RXGC-B24

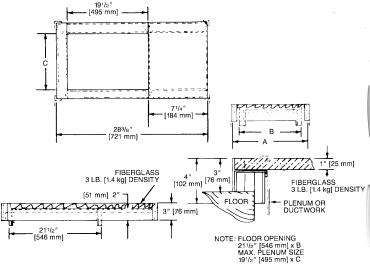

### **EXTERNAL TOP MOUNT FILTER RACK: RXGF-CC**

#### **INTERNAL FILTER RACK FOR AIR RETURN DUCT: RXGF-DB\***

Each order contains (1) one box of 10 filter racks supplied without filters.

\*Filters available through PROSTOCK®.

FILTER RACK FILTER

FILTER RACK FILTER SIZES® INCHES [mm]							
MODEL RGTS-	RXGF-CC						
04	(2) 12 x 20 [305 x 508]						
06	(2) 12 x 20 [305 x 508]						
07	(2) 12 x 20 [305 x 508]						
09	(2) 12 x 20 [305 x 508]						
10	(2) 12 x 20 [305 x 508]						
12	(2) 14 x 20 [305 x 508]						

<sup>\*</sup>Filter racks are shipped without filters.

### **RXGP-F03**

**TWINNING KIT**—is for use with Ruud *Value Series* Gas Furnaces for parallel operation requirements.

## **FOR HIGH ALTITUDES:**

*HIGH ALTITUDE KIT:
F04-105 KBTU/H
F06-45/60/90 KBTU/H
F05-120 KBTU/H
F07-75 KBTU/H

\*For installations over 5000 ft.

OPTION CODE FOR HIGH ALTITUDE: U.S. & Canada - 278

NOTE: High altitude kits and options do NOT include additional burner orifices.

If a burner orifice change is necessary, they must be ordered through PROSTOCK®. See Installation Instructions for more information.

Option - 278 furnaces are shipped with #51 DMS orifices installed. This is one drill size smaller than standard furnaces to account for expected average elevations and heating values typically seen in these areas.

**CAUTION:** Always follow National Fuel Gas Code (NFGC) guidelines when converting furnaces for high altitudes.

For all installations above 2000 ft. (including all option – 278 models), the burner orifice size needs to be recalculated and verified. A burner orifice change may still be required. See Installation Instructions for more information.

**NOTE:** For Canadian installations only, an optional derate (manifold gas pressure reduction) method may be used to adjust the furnace for altitude. See Installation Instructions for more information. This optional method may **NOT** be used for U.S. installations.

#### [ ] Designates Metric Conversions

## **THERMOSTATS**



200-Series \* Programmable



300-Series \*
Deluxe
Programmable
400-Series \*

Special Applications, Programmable



**500-Series \***Communicating/
Programmable

Brand		Descripter (3 Characters)	Series (3 Characters)	System (2 Characters)	Type (2 Characters)
UHC	-	TST	213	UN	MS
UHC=Ruud		TST=Thermostat	200=Programmable 300=Deluxe Programmable 400=Special Applications/ Programmable 500=Communicating/ Programmable	GE=Gas/Electric UN=Universal (AC/HP/GE) MD=Modulating Furnace DF=Dual Fuel CM=Communicating	SS=Single-Stage MS=Multi-Stage

<sup>\*</sup> Photos are representative. Actual models may vary.

For detailed thermostat match-up information, see specification sheet form number T22-001.

## **GENERAL TERMS OF LIMITED WARRANTY\***

Ruud will furnish a replacement for any part of this product which fails in normal use and service within the applicable period stated, in accordance with the terms of the limited warranty.

\*For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.

Conditional Parts (Registration Required)......Ten (10) Years Heat Exchanger ......Twenty (20) Years



In keeping with its policy of continuous progress and product improvement, Ruud reserves the right to make changes without notice.

Ruud Heating, Cooling & Water Heating • P.O. Box 17010 Fort Smith, Arkansas 72917 • www.ruud.com Ruud Canada • 125 Edgeware Road, Unit 1 Brampton, Ontario • L6Y 0P5