



SUBMITTAL COVER SHEET

PROJECT NAME _____
 LOCATION _____
 ARCHITECT _____
 ENGINEER _____
 CONTRACTOR _____
 SUBMITTED BY _____ DATE _____

UNIT SUMMARY

Quantity						
Unit Designation						
Model No.						
Total Cooling						
Sensible Cooling						
Air Ent. Evaporator						
Air Lvg. Evaporator						
Heating Input						
Heating Output						
CFM/ESP						
EER/SEER						
Electrical						
Minimum Ampacity						
Min.-Max. Breaker						
Net Unit Weight						
Accessory						
Catalog Form Number						


ACCESSORIES:

NOTES:


SUBMITTAL SHEET FOR PACKAGE AIR CONDITIONER UNITS: RLNL-C WITH CAPACITIES FROM 15-25 TONS [52.8-87.9 kW]

R-410A


JOB NAME _____
 CONTRACTOR _____
 ENGINEER _____
 LOCATION _____
 ORDER NO. _____
 SUBMITTED FOR APPROVAL RECORD
 SUBMITTED BY _____
 DATE _____
 UNIT DESIGNATION _____
 MODEL NO. _____

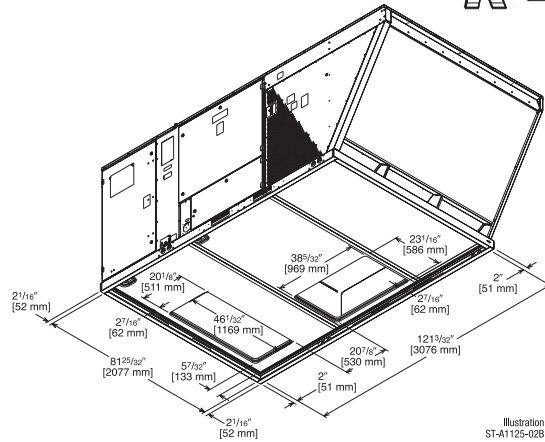

BOTTOM VIEW

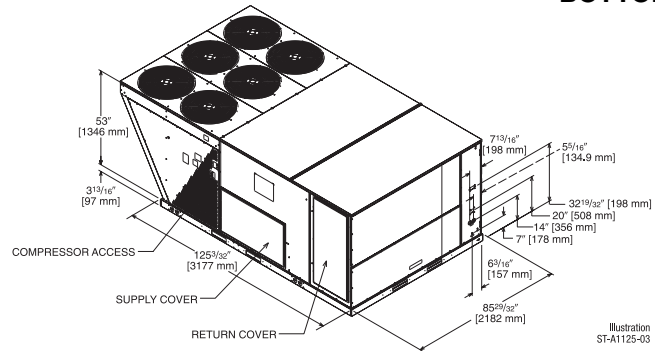

ROOFCURB INSTALLATION

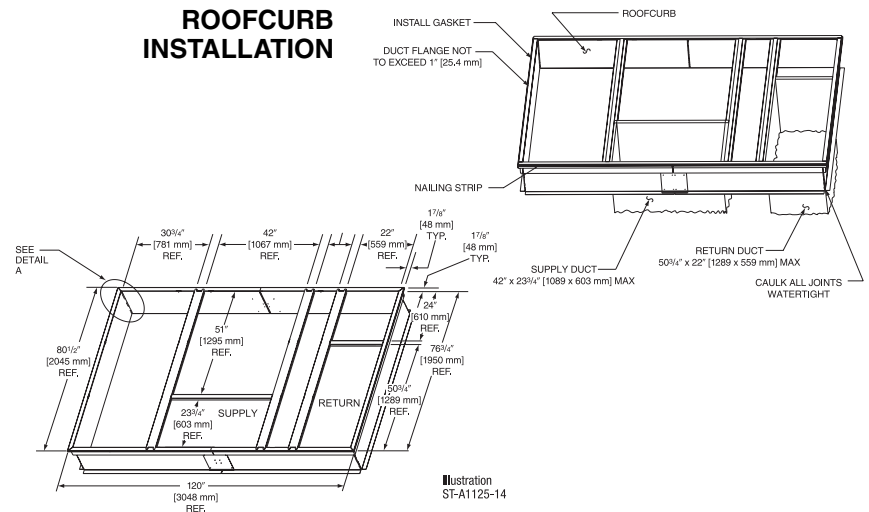

[] Designates Metric Conversions



UNIT DATA

COOLING PERFORMANCE

TOTAL CAPACITY* _____ MBH
 SENSIBLE CAPACITY* _____ MBH
 EFFICIENCY (at ARI) _____ EER
 PART LOAD EFFICIENCY _____ IPLV
 AMBIENT DB TEMP _____ °F
 ENTERING DB TEMP _____ °F
 ENTERING WB TEMP _____ °F
 LEAVING DB TEMP _____ °F
 LEAVING WB TEMP _____ °F
 TOTAL POWER INPUT _____ kW
 ELEVATION _____ FT
 SOUND POWER _____ DBELS

HEATING PERFORMANCE

ELECTRIC HEAT CAPACITY _____ kW

SUPPLY AIR BLOWER PERFORMANCE

SUPPLY AIR _____ CFM [L/s]
 OUTSIDE AIR _____ CFM [L/s]
 EXTERNAL STATIC PRESSURE _____ IWG
 DUCT CONNECTION LOCATION _____
 BLOWER SPEED _____ RPM
 MOTOR RATING _____ HP [W]
 BRAKE HORSEPOWER _____ BHP
 POWER INPUT REQUIREMENT _____ kW

ELECTRICAL DATA

POWER SUPPLY _____ Hz
 MINIMUM CIRCUIT AMPACITY _____ AMPS
 MAXIMUM OVERCURRENT DEVICE FUSE SIZE _____ AMPS
 HACR CIRCUIT BREAKER _____ AMPS

DIMENSIONS & WEIGHT

HEIGHT _____ IN WIDTH _____ IN DEPTH _____ IN
 TOTAL WEIGHT _____ LBS [kg]
 (including factory options)

CLEARANCES

FRONT 80" [2032 mm] BACK 18" [457 mm]
 BOTTOM 0" TOP 60" [1524 mm]
 LEFT SIDE 18" [457 mm] 36" [914 mm]
 RIGHT SIDE (condenser end) 18" [457 mm]



25 TON MODEL IS OUTSIDE THE SCOPE OF ARI 340/360



FEATURES FOR PACKAGE AIR CONDITIONERS RLNL-C 15 THRU 25 NOMINAL TONS [52.8 THRU 87.9 kW]

Cooling

- R410A Refrigerant
- Quiet, Efficient, Scroll Compressors
- Two-Stage Cooling for Superior Comfort Control at Minimum Operating Cost
- Belt-drive Blower with optional drive to accommodate design conditions as high as 2.0 inches [.37 kPa] of external static pressure at nominal airflow
- Copper Tube/Aluminum Fin Coils

Service Features

- 1/4 turn Fasteners and Hinged Access Panels for Convenience
- Large Control Panel with numbered and color coded wiring for Easy Troubleshooting
- Front Access, Slide-Out Blower Assembly for Easy Maintenance
- Convertible Airflow for Maximum Flexibility
- Solid-state microprocessor-based control board provides flexible control and extensive diagnostics for all unit functions
- Features a 16 x 2 character LCD display and a five-button keypad for local configuration and direct diagnosis of the system
- Slide out Condensate Drain pan to simplify Cleaning
- Factory-Installed two-inch [50.8 mm], throw away filters. Accessible without tools
- Plug-in Electrical Connections on outdoor fan assemblies
- Unit is prewired to accept Slip-In Economizer
- Externally-mounted refrigerant gauge ports

- Side or Base utility access minimizing roof penetrations
- Full perimeter, forkable, riggable baserails with protective forkboards for easy handling
- Complete Factory Tested, Charged, Wired
- Compatible with a third party building management system that supports the BACnet Application Specific Controller device profile
- Compatible with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile

Reliability Features

- One-inch [25.4 mm] raised flanges on supply/return opening for superior water management
- Base pan Insulation mounted on bottom helps eliminate corrosion and improves indoor air quality
- Non-Corrosive, sloped drain pan helps improve indoor air quality
- Insulation secured by adhesive *and* mechanical means
- Electrodeposition power-coat paint process guards against extreme weather conditions and withstands 1000-hour salt-spray test
- High and Low Refrigerant Pressure Switches
- Solid core refrigerant liquid line filters
- Available Comfort Alert® Module for power phase monitoring protection

[] Designates Metric Conversions

ACCESSORIES

Factory Installed

- Oversized Blower motor
- Non-Powered Convenience Outlet
- Low Ambient w/Comfort Alert® Control
- Single Enthalpy Economizer
w/Barometric Relief and DDC
- Single Enthalpy Economizer w/Barometric
Relief, Smoke Detector and DDC

Field Installed

- Electric Heater Kits
- Non-Powered Convenience Outlet
- Low Ambient Control
- Comfort Alert® Control
- 14" Full Perimeter Roofcurb.....
- Roofcurb Adapter.....
- Concentric Diffuser
- Manual Outside Air Intake Damper
- Motorized Outside Air Intake Damper
- Motorized Outside Air Intake Damper
w/DDC Feedback
- Single Enthalpy Economizer
w/Barometric Relief and DDC
- Single Enthalpy Economizer w/Barometric
Relief, Smoke Detector and DDC
- Horizontal Single Enthalpy Economizer
w/Barometric Relief and DDC
- Dual Enthalpy Adapter.....
- Power Exhaust.....
- CO₂ Sensor (wall mount with LCD)

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Rheem Sales Company, Inc.
P.O. Box 17010, Fort Smith, AR 72917

"In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice."