




Product Submittal for XFIIRE™ - Type H Heating Boiler Models 300B-1000B

Date: \_\_\_\_\_ Job: \_\_\_\_\_ Location: \_\_\_\_\_
Equipment Tags: \_\_\_\_\_ Engineer: \_\_\_\_\_ Contractor: \_\_\_\_\_
Model: \_\_\_\_\_ Notes: \_\_\_\_\_
Prepared by: \_\_\_\_\_ Indoor [ ] Outdoor [ ] Gas Type: Natural Gas [ ] Propane [ ]

Stainless steel water-tube construction, versatile and adaptive controls. Designed for ease of maintenance.

- Up to 96.5% thermal efficiency at full rate
100% factory fire-tested
VERSA IC® modulating controller with 4.3" color touchscreen display
Raymote™ remote connectivity - optional
7:1 turn-down
Fault history with full diagnostics
Status display lighting in logo on front panel
Cascade up to 8 heaters - no external sequencer required
Cascade in parallel or sequential modulation modes
Three pump control (DHW, system and boiler)
Modbus RTU BMS port
Maximum outlet water temperature: 200°F
Maximum system temperature: 192°F
Zero side clearance to combustibles
Indoor/outdoor construction - standard
PVC, CPVC, polypropylene or stainless steel venting certified
Limited 20-year thermal shock warranty
Limited 10-year heat exchanger warranty
SCAQMD rule 1146.2 certified ultra-low NOx, < 20 PPM
Proudly assembled in the USA



**Features and Options**

**Heat Exchanger**

- All stainless steel construction with brass connections
- Gasketless heat exchanger design
- ASME H stamped; 160 PSIG MAWP
- National board registered
- ASME pressure relief valve (shipped loose)
  - 60 PSIG (standard)
  - \_\_\_\_ PSIG (optional)
- T&P gauge (shipped loose)

**Power**

- 120 VAC, 60 Hz, 1Ø power supply (standard)
- E-16 208 VAC, 60 Hz, 1Ø power supply (optional)

**Control**

- VERSA IC® with 4.3" color touchscreen display
- C-11 Raymote™ IoT connectivity (optional)
- Ignition module
  - 3-Try (standard)
  - C-6 single-try (optional)
- 0-10 VDC input for BMS
- Cascade up to 8 heaters
- Cascade in parallel or sequential modulation modes
- Remote flame sensor
- High limit, manual reset, fixed, 200°F
- Alarm dry contact connection
- On/off power switch
- Flow switch (factory mounted)
- F-15 Flow meter and manifold kit
  - Loose
  - Factory-mounted
- Low water cut-off, remote probe
- Blocked vent pressure switch
- Boiler, DHW & system pump contacts
- Water temperature sensors 10kΩ (2 mtd, 3 loose, 1 well)
- Outdoor air sensor (shipped loose)
- Data logging
- Modbus RTU BMS port
- B-85 BMS Gateway, Modbus RTU to Modbus TCP, N2 Metasys, BACnet IP, or BACnet MS/TP
  - Loose
  - Factory mounted

- B-86 BMS Gateway, Modbus RTU, LonWorks
  - Loose
  - Factory mounted

**Burner**

- Direct spark ignition (DSI)

**Gas Train**

- Fuel
  - Natural gas
  - Propane (minimum grade HD-5)
- Dual-seat combination valve
- H7 electronic modulating firing mode

**Construction**

- Indoor/outdoor construction
- Enclosed front controls
- PolyTuf powder-coat finish
- Rear connections (water, gas, vent, electrical, combustion air, condensate and drain)
- Design certified ANSI Z21.13/CSA 4.9
- Built-in combustion air filter
- Built-in condensate trap and switch

**Venting, Cat IV**

(PVC-CPVC-Polypropylene-Stainless Steel)

- Vent termination (options)
  - D-11 Outdoor flue exhaust termination kit (stainless steel)
  - D-15 Vent termination cap (horizontal)
- Extractor fan cascade vent as needed
  - By others
  - Not required

**Other Options**

- B-31 Tankstat well
- B-32 Outdoor air sensor
- B-65 Indirect tank aquastat controller
- D-18 Flue exhaust boiler adapter
  - Truseal™ Air Intake
    - D-21 Factory mounted
    - D-22 Loose
  - D-23 Flue exhaust vent support
  - D-33 Polypropylene vent adapter (Centrotherm InnoFlue®)
  - D-37 Motorized combustion air damper
- E-5 Boiler alarm with 4" bell
  - Loose
  - Factory mounted

- E-15 Boiler alarm with buzzer
  - Loose
  - Factory mounted

- I-5 High limit, manual reset, 200°F max
  - Loose
  - Factory mounted
- I-13 High limit, auto reset, 200°F max
  - Loose
  - Factory mounted
- I-21 High limit, auto reset, fixed, 200°F max
  - Loose
  - Factory mounted
- M-1 Safety valve, motorized
- M-10 Safety valve, solenoid
- M-15 Vent valve (requires M-1 or M-10)
- P-\_\_ Pump: \_\_ HP, 120 VAC, 1 Ø, 60 Hz
  - Cast iron
  - Bronze / SS
- S-1 Low gas pressure switch, manual reset
- S-2 High gas pressure switch, manual reset
- Z-4 T & P relief valve
- Z-12 Condensate treatment kit
- Z-13 Multi-unit mounting

**Multi-Boiler System Controllers**


- TempTracker Mod+ Hybrid Digital Controllers
  - B-36 2-4 boilers, OA reset
  - B-37 5-10 boilers, OA reset
  - B-38 11-16 boilers, OA reset
  - B-39\* EMS 4-20 mA Remote set point Interface Module
  - B-62\* BACnet MS/TP interface module (\*requires B-36 to B-38)

**Additional Options or Accessories**

\_\_\_\_\_

**Regulatory Agency requirements**

\_\_\_\_\_

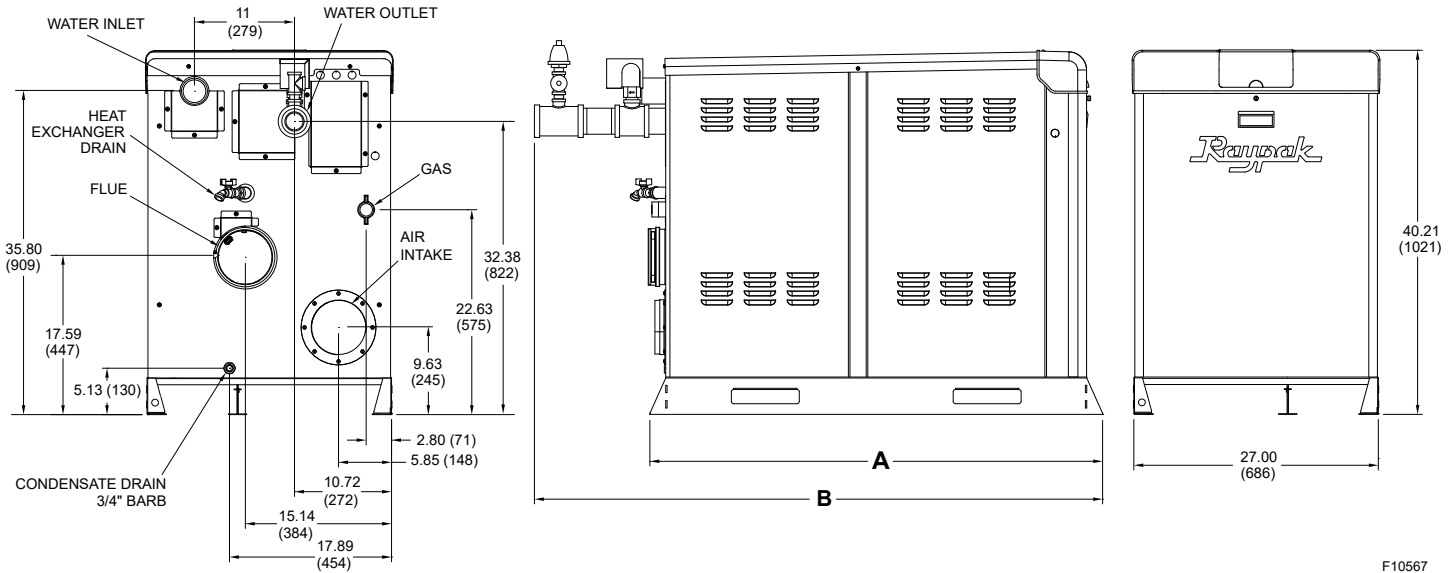

F10567

Model H7-	MBTUH (kWh)		Turn Down	AHRI Thermal Efficiency	Dimensions - Inches (mm)						Approx. Shipping Weight lbs. (kg)
	Input	Output			A	B	Water Inlet/Outlet NPT	Flue Ø*	Air Intake Ø	Gas Connection NPT	
<input type="checkbox"/> 300B	300 (88)	289 (85)	7:1	96.5%	36.83 (935)	45.34 (1151)	2 (50)	4 (100)	4 (100)	1 (25)	411 (186)
<input type="checkbox"/> 400B	399 (117)	383 (112)			36.83 (935)	45.34 (1151)	2 (50)	4 (100)	4 (100)	1 (25)	411 (186)
<input type="checkbox"/> 500B	500 (147)	480 (141)			36.83 (935)	45.34 (1151)	2 (50)	4 (100)	4 (100)	1 (25)	416 (189)
<input type="checkbox"/> 650B	650 (191)	624 (183)		96.0%	45.25 (1149)	54.66 (1388)	2 (50)	6 (150)	6 (150)	1-1/4 (32)	501 (227)
<input type="checkbox"/> 800B	800 (235)	768 (225)			45.25 (1149)	54.66 (1388)	2 (50)	6 (150)	6 (150)	1-1/4 (32)	547 (248)
<input type="checkbox"/> 1000B	1000 (294)	960 (281)			50 (1270)	62.75 (1593)	2.5 (65)	6 (150)	6 (150)	1-1/4 (32)	627 (284)

\* PVC/CPVC Standard

	Clearance - Inches (mm)						
	Floor	Rear	Right	Left	Top	Front	Vent
Combustible Minimum	0	24 (610)	0	0	0	Open	1 (25)
Minimum Service	0	24 (610)	0	0	0	30 (762)	1 (25)

Model H7-	Boiler Current Draw	
	<input type="checkbox"/> 120 VAC	<input type="checkbox"/> 208 VAC
<input type="checkbox"/> 300B	<7.5 A	<5.0 A
<input type="checkbox"/> 400B	<7.5 A	<5.0 A
<input type="checkbox"/> 500B	<5.0 A	<5.0 A
<input type="checkbox"/> 650B	<5.0 A	<5.0 A
<input type="checkbox"/> 800B	<7.5 A	<7.5 A
<input type="checkbox"/> 1000B	<7.5 A	<7.5 A

\* Current draw is for heater only. Supply breaker must have delayed trip.  
 \*\* Single phase only.

**Flow and Pressure Loss Information**


Model H7-	MBTUH (kWh)		20 °F ΔT		30 °F ΔT		Min. Flow			Max. Flow		
	Input	Output	GPM (L/min)	ΔP ft.wc. (kPa)	GPM (L/min)	ΔP ft.wc. (kPa)	GPM (L/min)	ΔP ft.wc. (kPa)	ΔT °F (°C)	GPM (L/min)	ΔP ft.wc. (kPa)	ΔT °F (°C)
<input type="checkbox"/> 300B	300 (88)	289 (85)	29 (110)	6 (18)	19 (72)	3 (9)	15 (56)	2 (6)	39 (22)	38 (144)	10 (30)	15 (8)
<input type="checkbox"/> 400B	399 (117)	383 (112)	38 (144)	11 (33)	26 (97)	5 (15)	20 (74)	3 (9)	39 (22)	50 (189)	17 (51)	15 (8)
<input type="checkbox"/> 500B	500 (147)	480 (141)	48 (182)	12 (36)	32 (121)	6 (18)	25 (93)	4 (12)	39 (22)	62 (235)	20 (60)	15 (8)
<input type="checkbox"/> 650B	650 (191)	624 (183)	62 (235)	11 (33)	42 (158)	5 (15)	32 (121)	3 (9)	39 (22)	80 (303)	17 (51)	16 (9)
<input type="checkbox"/> 800B	800 (235)	768 (225)	77 (291)	12 (36)	51 (194)	6 (18)	39 (149)	4 (12)	39 (22)	90 (341)	16 (48)	17 (9)
<input type="checkbox"/> 1000B	1000 (294)	960 (281)	96 (363)	14 (42)	64 (242)	6 (18)	49 (186)	4 (12)	39 (22)	90 (341)	12 (36)	21 (12)

Maximum flow based on 15°F ΔT (8 °C) or 8 ft/s (2.4 m/s) velocity, whichever is less.

SHL = System Head Loss of water heater plus 100 equivalent feet (30 m) of pipe.

When water hardness is higher than 15 GPG, a softener **MUST** be used.

**Footprint and Base Anchor Bolt Pattern**

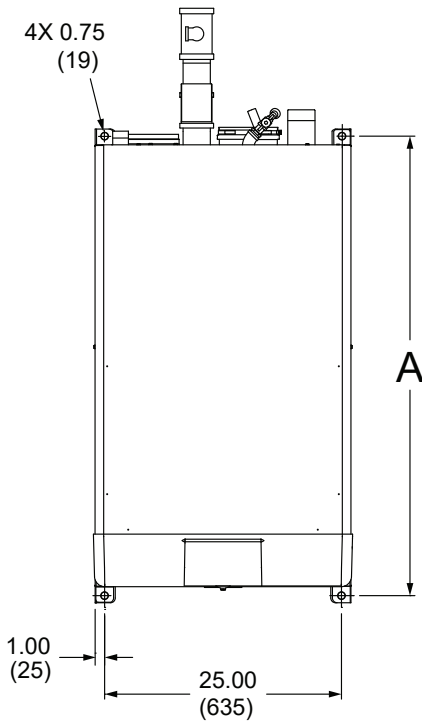

Dimensions are shown in inches (mm)

Model H7	Dimensions Inches (mm)
	A
<input type="checkbox"/> 300B-500B	35.33 (897)
<input type="checkbox"/> 650B-800B	43.75 (1111)
<input type="checkbox"/> 1000B	48.50 (1231)

Model H7	Standard H7 Boiler Pump				
	TACO MDL	HP	Amps @120 VAC	GPM/FT. HD.	ΔT °F (°C)
<input type="checkbox"/> 300B	0012	1/8	1.3	30@8.5'	19 (11)
<input type="checkbox"/> 400B	0012	1/8	1.3	30@8.5'	26 (14)
<input type="checkbox"/> 500B	0012	1/8	1.3	32@7.8'	30 (17)
<input type="checkbox"/> 650B	1611	1/4	5.7	55@14'	23 (13)
<input type="checkbox"/> 800B	1611	1/4	5.7	57@13'	27 (15)
<input type="checkbox"/> 1000B	1611	1/4	5.7	65@9.8'	30 (17)