

Job: _____
 Engineer: _____
 Contractor: _____
 Prepared By: _____ Date: _____
 Model: _____ Indoor/Outdoor: _____

Raytherm® - Type WH

Water Heaters
 Commercial
 Models 182-400

EFFICIENT

- ▶ 82% thermal efficiency – highest of any atmospheric water heater available today

THERMAL SHOCK PROOF

- ▶ Twenty-year warranty against thermal shock damage up to 150°F differential
- ▶ Maximum operating temperature: 200°F

LIGHTWEIGHT


- ▶ A floor load of 70 lbs./sq. ft. or less

HIGH RECOVERY

- ▶ Cuts fuel costs substantially because the standby and radiation losses associated with other tank-type water heaters are eliminated

LOW WATER OPERATING TEMPERATURE

- ▶ Operates with water temperature as low as 105°F without condensing

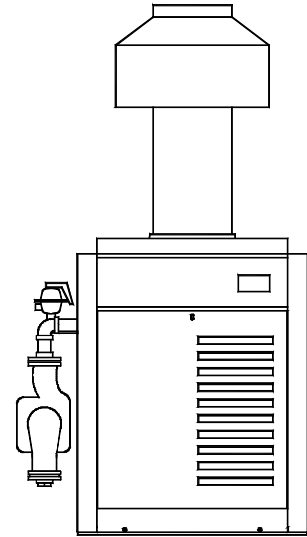

Proudly Assembled in the USA

Indoor Model Illustrated

Heat Exchanger

- ASME Inspected and Stamped 160 PSIG
- National Board Approved
- Headers
 - Bronze – Standard
 - Glass-lined Cast Iron – Option A-2
- Fin Tubing
 - Copper – Standard
 - Cupro Nickel – Option A-3
- ASME Steel Tube Sheet
- Silicone O-Rings
- ASME Pressure Relief Valve
 - 125 PSIG – Standard
 - 150 PSIG – Option A-16
- Temperature and Pressure Gauge, Shipped Loose
- Water Connections
 - Left Hand – Standard
 - Right Hand – Option A-6
- Two-pass Flow Configuration
- Pump – Optional
 - Mounted, 1/8 HP, 120 VAC, 1Ø, 60 Hz

Controls

- 120V, 60Hz, 1 Ph Power Supply
- 120/24V Transformer
- 100% Pilot Shut-off/Lockout
- Electronic, Intermittent Ignition (IID) Pilot
- High Limit Control, Manual Reset – 200°F

Controls (cont.)

- On/Off Switch
- Flow Switch
- Economaster II Pump Time Delay

Gas Control Train

- Manual Main Gas Shut-off Cock
- Main Gas Pressure Regulator
- Redundant Safety Shut-off Valve
- Control Valve
- Firing Mode
 - On/Off (WH1)
 - 2-stage (WH3)
 - Mechanical Modulation (WH2)
- Fuel
 - Natural Gas
 - Propane Gas
- Design Certified ANSI Z21.10.3/CSA 4.3

Construction

- Front Controls
- Stainless Steel Burners
- PolyTuf Powder Coat Finish
- Vent Selection
 - Indoor Drafthood – Option D-10
 - Outdoor Stackless Top – Option D-11
- Base – Optional
 - Combustible Floor Shield – Option J-1
- CSA Low Lead Certified ≤ .25% Lead

Temperature Controls

- B-2 Single-Stage Tankstat (100-180°F)
- B-3 2-Stage Tankstat (100-180°F)
- B-26 2-Stage Digital
- B-21 4-Stage Digital

Additional Safety Controls


- F-10 Low Water Cut-off Probe
- I-3 High Limit Control, Auto Reset, 180°F
- S-1 Low Gas Pressure Switch, Manual
- S-2 High Gas Pressure Switch, Manual
- _____
- _____



Raypak®
 A Rheem® Company

Raytherm - Type WH Models 182-400

Model _____

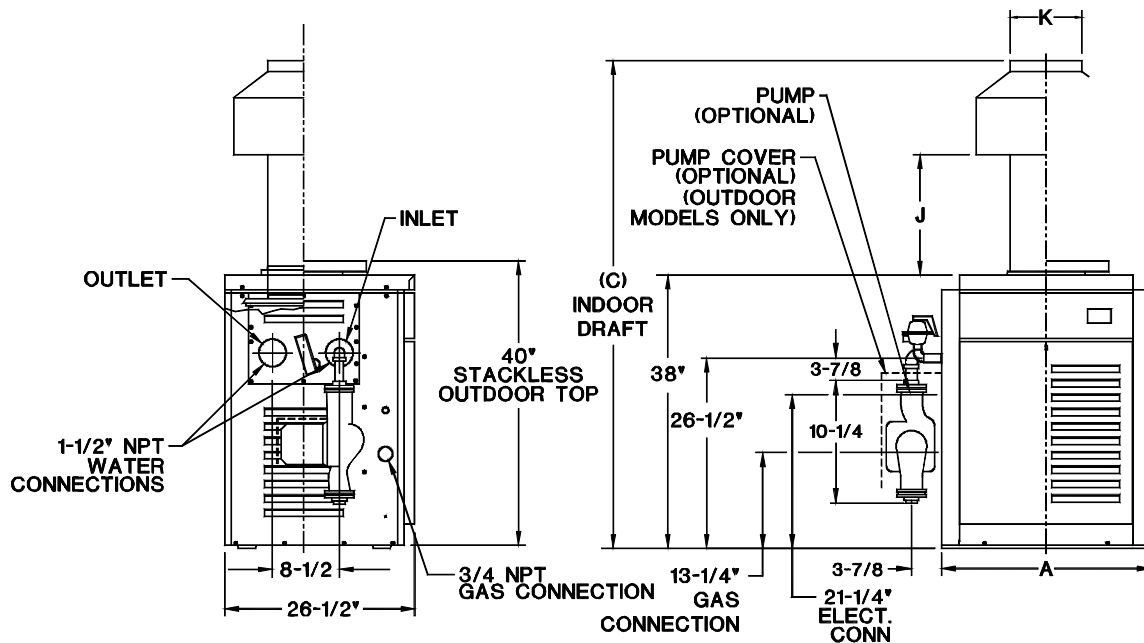

Model No.	MBTUH Input	MBTUH Output	Dimensions (Inches)				Shipping Weight (Lbs.) – Approx.	
			Width A	Height C	J	Flue Dia. K	No Pump	w/ Pump
WH-182	181	148	18-1/4	62-5/8	12-1/16	6	191	221
WH-260	264	216	22-3/8	62-7/8	11-1/8	7	214	244
WH-330	334	274	25-3/4	63-3/4	10-3/4	8	234	264
WH-400	399	327	29-1/4	65-3/8	12-1/2	9	253	283

NOTE: Ratings shown are for elevations up to 2,000 feet for indoor or outdoor installations. For elevations over 2,000 feet, reduce ratings 4% for each 1,000 feet above sea level.

HEATER RATES OF FLOW AND PRESSURE DROPS

Model No.	10° ΔT		20° ΔT		30° ΔT		40° ΔT	
	GPM	ΔP (ft)	GPM	ΔP (ft)	GPM	ΔP (ft)	GPM	ΔP (ft)
WH-182	30	4.2	N/A	N/A	N/A	N/A	N/A	N/A
WH-260	44	8.5	22	2.2	N/A	N/A	N/A	N/A
WH-330	N/A	N/A	28	3.4	N/A	N/A	N/A	N/A
WH-400	N/A	N/A	33	5.2	22	2.3	N/A	N/A

N/A – Not Applicable

HEATER RECOVERY RATES

Model No.	Temperature Rise							
	10°F	20°F	30°F	40°F	50°F	60°F	80°F	100°F
	Gallons Per Hour							
WH-182	1794	897	598	448	359	299	224	179
WH-260	2618	1309	873	655	524	436	327	262
WH-330	3321	1661	1107	830	664	554	415	332
WH-400	3964	1982	1321	991	793	661	495	396