



The new degree of comfort.™



Residential Gas  
Professional *Classic* Direct Vent Co-Axial  
Water Heaters for Manufactured Housing

# Professional *Classic*™ Direct Vent Co-Axial gas water heaters for Manufactured Housing that are FVIR compliant

## Efficiency

- .60 - .62 EF

## Performance

- FHR: 80 gallons for 50-gallon model and 65 gallons for 40-gallon model
- Recovery: 30.3 to 36.4 GPH at a 90° F rise, depending on model

## Flexibility


- Field convertible controls and burner assembly for natural gas or LP operation included
- Roof jack flange adjustment range available up to 34° (8 - 12)
- New smaller foot print – no external air tube
- Can be installed anywhere in the home
- 3/4" hot and cold top connections
- Easily fits into a standard drain pan

## Altitude Certification

- All models certified up to 7,700 ft. above sea level

## Longer Life

- Premium grade anode rod provides long-lasting tank protection

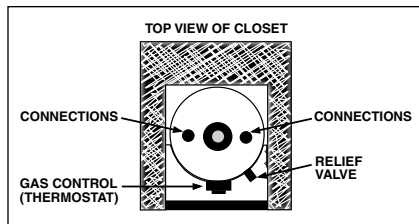

## Self Cleaning

- EverKleen™ patented system fights sediment build-up

## Plus...


- Certified for manufactured (HUD) and modular construction
- Enhanced flow brass drain valve
- Factory installed temperature and pressure relief valve – side location
- Low lead compliant
- Piezo ignition – easy light pilot, no matches required

## Warranty

- 6-Year limited tank and parts warranty\*

\*See Residential Warranty Certificate for complete information

Units meet or exceed ANSI requirements and have been tested according to D.O.E. procedures. Units meet or exceed the energy efficiency requirements of NAECA, ASHRAE standard 90, ICC Code and all state energy efficiency performance criteria.

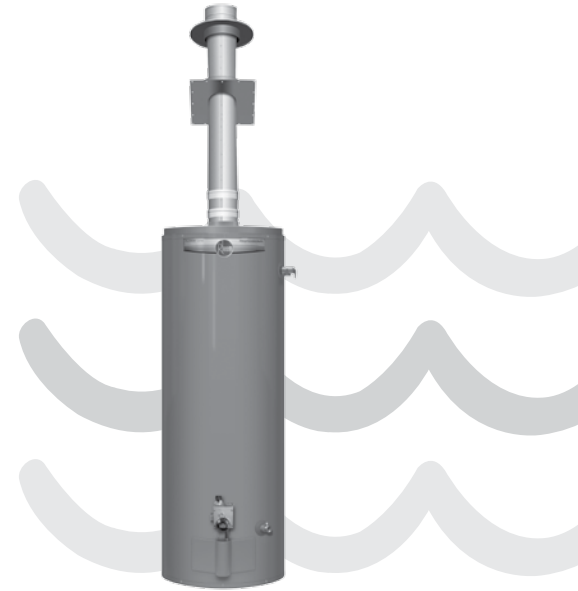

## Professional *Classic* Direct Vent Co-Axial for Manufactured Housing


40 and 50-Gallon Capacities  
Up to 36,000 Btu/h  
Natural and LP Gas



### CO-AXIAL ROOF JACK SIZING TABLE

34° MAX. (8-12 PITCH) ROOF JACK KIT PART NUMBER	ROOF JACK ADJUSTMENT RANGE (SEE X)
AP14363A	24 - 37 Inches
AP14363B	33 - 68 Inches
AP14363C	45 - 97 Inches
AP14363D	60 - 130 Inches
AP14363E	72 - 160 Inches

NOTE: 42° Max. adjustment roof jacks available. Roof Jacks must be ordered separately with this direct vent water heater and installed in accordance with the instructions furnished with the heater. No other roof jack or vertical vent kit is approved for installation with this heater.

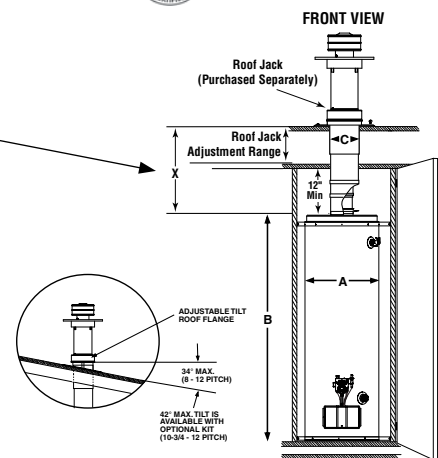

TYPE	GAL. CAP.	MODEL NUMBER	FEATURES				ROUGHING IN DIMENSIONS (SHOWN IN INCHES)				ENERGY INFO.			
			GAS INPUT IN THOUS. BTU/H		RECOVERY IN G.P.H. 90° RISE		FIRST HOUR DEL. G.P.H.		DIAM. A	TANK HT. B	VENT SIZE C	WATER CONNECTION	SHIP WT. (LBS)	ENERGY FACTOR NAT./LP
Tall	40	PROG40-36N RH62 MH DVX	36	30	36.4	30.3	65	65	19-3/4	60-1/2	5	3/4	155	0.62
Tall	50	PROG50-36N RH60 MH DVX	36	32	36.4	32.3	80	80	21-3/4	59-5/8	5	3/4	165	0.60

Energy Factor based on D.O.E. (Department of Energy) test procedures.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 101 Bell Road  
Montgomery, Alabama 36117-4305 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED HOME COMFORT